





INSPECTED BY:

1. Thread FA-03 mounting stake to base of stem.
2. Remove 20 watt S.C. Halogen light bulb from packaging and insert into socket at top of stem by pushing down and rotating clockwise.
3. Install hat by loosening set screw on hub so hub slides freely over the stem. Slide hat onto top of stem all the way to the stop drive screw and hand tighten set screw.
4. Install fixture into ground at desired location. Mounting stake can be pressed or hammered into ground with a standard hammer or rubber mallet. We recommend our Focus FT-01 Stake Installation Tool which protects the stake and fixture from damage during installation into hard ground. Always leave top 1" section of the stake above ground to help isolate the metal from potentially corrosive soils.
5. Connect 18/2 lead wire from fixture to main supply cable. We recommend using our FA-05 Quick Connector (sold separately) or UL approved direct burial gel filled wire connectors.
6. Turn on power supply to fixture and check for proper connection and operation.
7. Loosen set screw on adjustable hub and set hat height to produce desired light output and beam spread then retighten set screw.

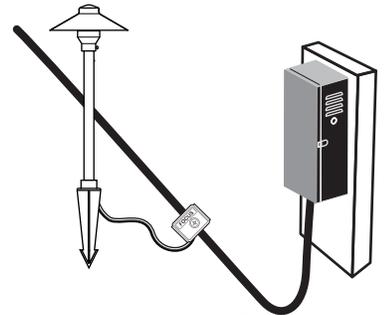

**FA-05
Quick Connector**



**FT-01
Stake Installation Tool**

LAMP INSTALLATION / REPLACEMENT

Turn off power before installing or servicing fixtures.

CAUTION: Do not exceed maximum wattage marked on fixture label.

To re-lamp **RXA-01 & RXA-02** area lights, first let light bulb cool down prior to touching. Loosen set screw on adjustable hub and slide hat up and off of stem. Push S.C. base light bulb into socket and turn counter clockwise to release, then pull up and out of socket. Check label under hat for correct size and wattage S.C. base light bulb. Insert new S.C. base light bulb into socket by pushing down and rotating clockwise. Replace hat and tighten set screw on adjustable hub at desired height. Turn on power supply to fixture and check for proper connection and operation.

MOUNTING OPTIONS

