



HANGING FIXTURES SL-12-SERIES

SPECIFICATIONS

CONSTRUCTION: Solid brass, stamped and welded, 18" long baby oval brass chain and cast brass hoop

LENS: Gold iridescent glass, White Cracked Ice (-ICE) plastic lens available

LAMP: 18 watt, S-8 #1141 (25 watt max.)

LAMP LIFE: 1200 hours average rating for S-8 #1141

SOCKET: Single contact bayonet, brass nickel plated screw shell (Ba15s) with 200°C lead wires

WIRING: Black 2 foot 18/2 zip cord. Consult factory for additional lengths

MOUNTING: FA-111-SM-H hanging fixture mini junction box


FINISH-SL-12-BRS: Unfinished brass

SL-12: Black texture-optional finishes available

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	FINISH
SL-12	Hanging Brass Lantern	Black texture
SL-12-BRS	Hanging Brass Lantern	Unfinished brass

LIGHT DISTRIBUTIONS AND PHOTOMETRICS


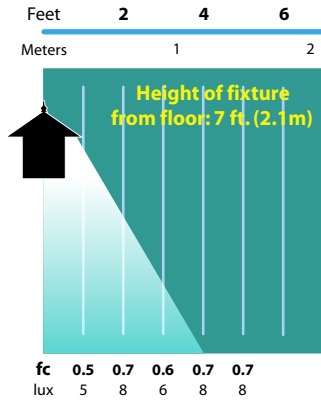


SL-12
Half Spread Photometrics
8 ft. (2.4m) diameter


10,000 HOUR
XENON
&
HALOGEN
AVAILABLE



SL-12-BAR



FA-111-SM-H



SL-12



12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number.
For use with Focus CPC or hub supplied by others.

FSA-00

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC



FOCUS[™]
INDUSTRIES

INSTALLATION INSTRUCTIONS (12V) FOR HANGING LIGHT FIXTURES

Inspected by

- 1) Using Junction Box as a template mark holes to attach to surface. Drill hole if necessary.
- 2) Bring in 12v supply wire through liquid tight connector and wire to 18/2c zip cord using blue wirenuts provided.
- 3) Attach/screw box to surface with appropriate fastener. Wire supply wire to 12v and check for proper installation.

For Questions Call 1-888-882-1350

