



DIRECTIONAL LIGHTS DL-04-LEDP SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Extruded aluminum; matching cast aluminum adjustable swivel

LENS: High impact clear acrylic

LIGHT SOURCE: 4w integrated LED flat panel, warm white 3000K

LIFETIME RATING: 50,000 hours

SOCKET: None

12V INTERNAL DRIVER 5w 350mA output, 12v AC input. Voltage range of 9 to 18 volts with optimum operating range of 10 to 15 volts for consistent performance and brightness. For use with magnetic transformers only.

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v. only)
For 25 foot 16/2 fixture lead wire add -25F to catalog number.


CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only

MOUNTING: FA-03 black 9" ABS stake threaded 1/2" NPS

FINISH: Aluminum-Black texture polyester powder coat. Optional finishes available



DL-04-LEDP4W-WBR




DL-04-LEDP-BLT

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	EST. SHIP WEIGHT
DL-04-LEDP4W-BLT	12v Aluminum Floodlight	4w LED Panel	2.0 lbs.




MOUNTING ACCESSORIES

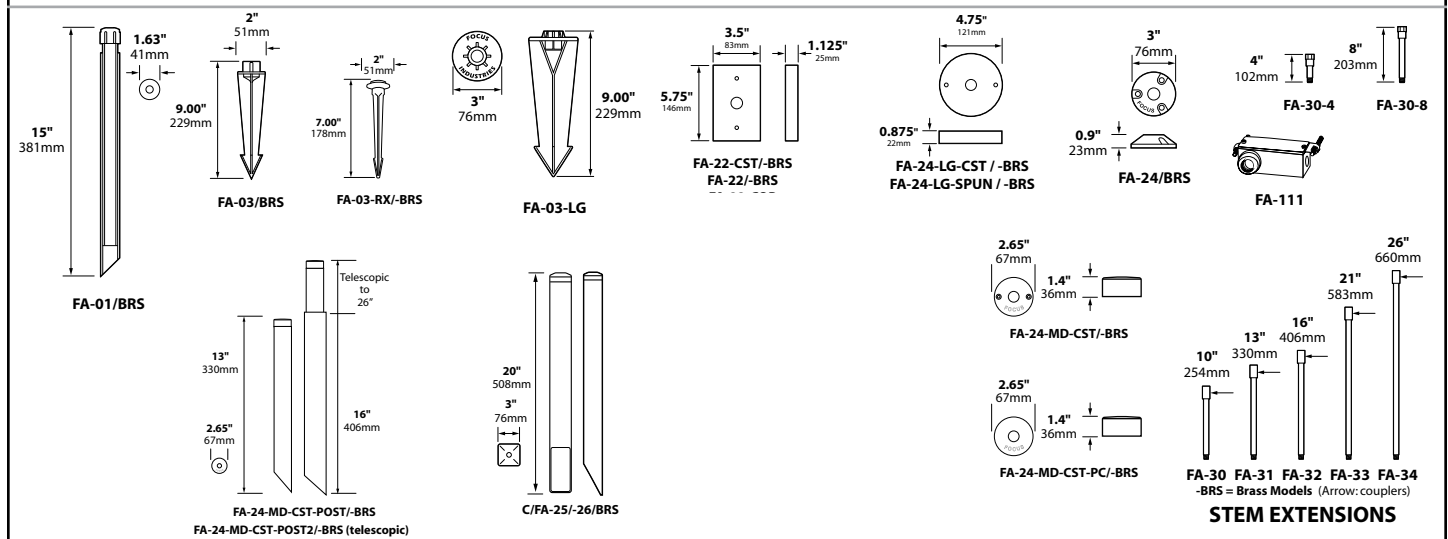

BEAM/GLARE CONTROL ACCESSORIES

- FA-07** Square 1/4" Hex Cell Louver
FA-10-BLUE Blue Plastic Gel
FA-10-GREEN Green Plastic Gel
-HE Add to catalog # for Hood Extension



DL-04-HE
(With Hood Extension)

JOB INFORMATION

Type: _____ Date: _____
Job Name: _____
Cat. No.: _____
Lamp(s): _____
Specifier: _____
Contractor: _____
Notes: _____

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC	-BAR/CAR	-BAV/CAV	-BAT