



DIRECTIONAL LIGHTS DL-09-SM SERIES

TYPE

SPECIFICATIONS

CONSTRUCTION: Cast aluminum or cast brass mini directional flood light on matching cast aluminum or brass stake

LENS: High impact acrylic lens

LAMP SUPPLIED: 5w G4 bi-pin Xenon; 10,000 hours average rating (5w Max)

SOCKET: High temperature ceramic G4 with 250°C silicone lead wires


WIRING: Black 3 foot 18/2 zip cord from base of fixture

For 25 foot 16/2 fixture lead wire add **-25F** to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

MOUNTING: FA-03-RX-BLT (Aluminum models) or FA-03-RX-BRS (Brass models)

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available
Brass - Unfinished brass. Optional finishes available

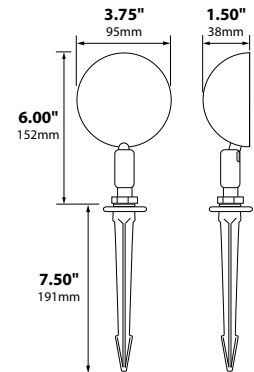

DL-09-SM-X-BRS











ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
DL-09-SM-X-BLT	Aluminum Mini Directional Flood	5w G4 bi-pin Xenon	1.0 lbs.
DL-09-SM-X-BRS	Brass Mini Directional Flood	5w G4 bi-pin Xenon	1.0 lbs.

IP53




MOUNTING ACCESSORIES



STEM EXTENSIONS

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

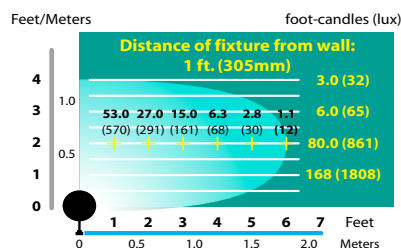

DL-09-SM Half Spread Photometrics

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC	-BAR/CAR	-BAV/CAV	-BAT