



DIRECTIONAL LIGHTS DL-15-SMHP



TYPE

SPECIFICATIONS

CONSTRUCTION: Cast aluminum or cast brass flood;
matching cast aluminum or brass adjustable swivel

REFLECTOR: Diamond embossed specular aluminum

LENS: High impact clear tempered flat glass

LAMP SUPPLIED: 20w T4 Bi-Pin Halogen (-H) - 5,000 hours average rating

LAMP OPTIONS: We recommend 20w Xenon (-X) - 10,000 hours average rating

SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable
(12/2, 10/2 or 8/2 only) 12v only

MOUNTING: FA-03 black 9" ABS stake threaded 1/2" NPS

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available.
Brass - Unfinished brass. Optional finishes available.

GO GREEN




DL-15-SMHP-WBR

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
DL-15-SMHP-BLT	Small Aluminum floodlight	20w T4 BP Halogen	1.0 lbs.
DL-15-SMHP-BRS	Small Brass floodlight	20w T4 BP Halogen	2.0 lbs.




MOUNTING ACCESSORIES

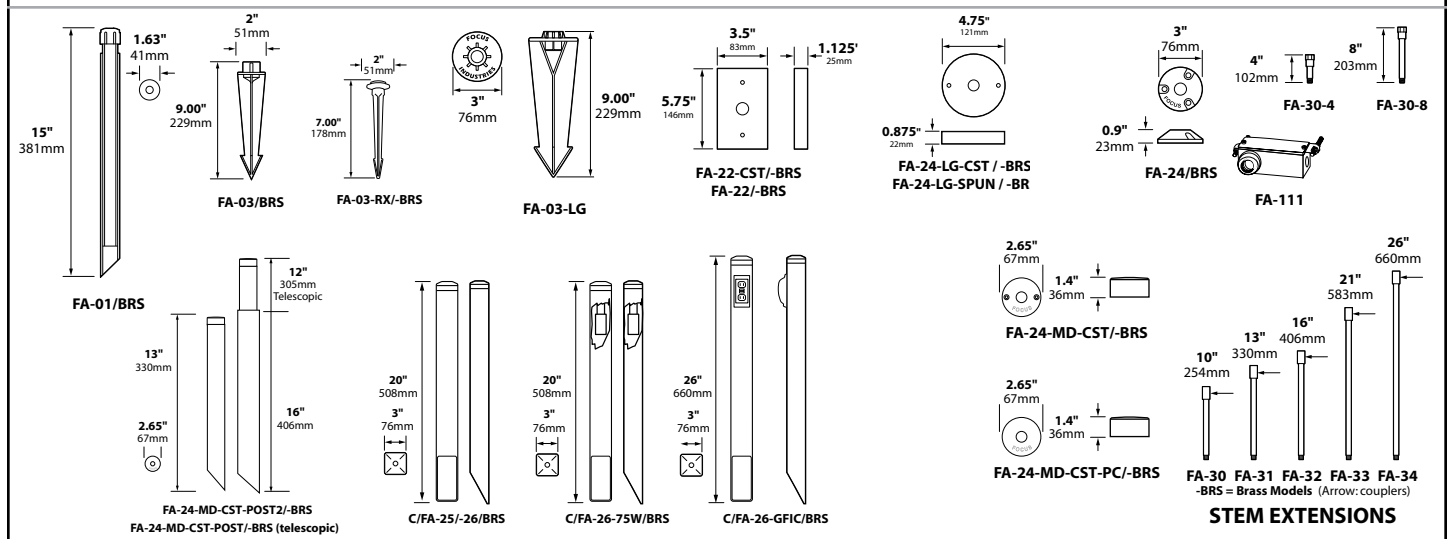

BEAM/GLARE CONTROL

FA-07-15 Square 1/4" Hex Cell Louver



JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCE DRIVE
LAKE FOREST, CA 92630
www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC	-BAR/CAR	-BAV/CAV	-BAT