



landscape • entertainment • architectural • hospitality • illumination

DL-42/43/45 SERIES DIRECTIONAL LIGHT





DIRECTIONAL LIGHTS

DL-43-LEDM11



TYPE

SPECIFICATIONS

CONSTRUCTION: Cast aluminum or Cast brass integrated heat sink base; matching cast adjustable swivel with 240° rotation; Extruded aluminum, brass or copper housing (copper housing has brass base)

LENS: High impact clear tempered convex glass

O-RING: 2x High temperature red silicone

LIGHT SOURCE: Integrated 590 lumen 11w LED module (equivalent to 50w halogen) with 6 high power Cree XP-G LEDs; 50,000 hours average rating. 2800k color temperature.

OPTICS: Interchangeable spot (15°), flood (40°), wide flood (60°) and 160° very wide flood (no optics)

12v DRIVER: Integrated on-board, no external driver required. 12v AC/DC input. Voltage range 9-18v; Optimum operating range 12v-15v

120v DRIVER: HW-12-60LED* 120v Input, 12v AC output LED Driver

120v/277v DRIVER: HW-12-20MVLED* 90v-277v Input, 12v DC output LED Driver

*Must use FA-26 mounting post or junction box

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

MOUNTING:

Aluminum model: FA-03 black 9" ABS stake, tapped 1/2" NPS

Brass & Copper models: FA-03-LG large black 9" ABS stake, tapped 1/2" NPS

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available.

Brass & Copper - Unfinished. Optional finishes available.


GO GREEN



DL-43-LEDM1140-BLT

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
DL-43-LEDM1115-BLT	Aluminum Bullet, 15° Optics	11w LED Module	3.0 lbs.
DL-43-LEDM1140-BLT	Aluminum Bullet, 40° Optics	11w LED Module	3.0 lbs.
DL-43-LEDM1160-BLT	Aluminum Bullet, 60° Optics	11w LED Module	3.0 lbs.
DL-43-LEDM11WF-BLT	Aluminum Bullet, No Optics	11w LED Module	3.0 lbs.
DL-43-LEDM1115-BRS	Brass Bullet, 15° Optics	11w LED Module	5.0 lbs.
DL-43-LEDM1140-BRS	Brass Bullet, 40° Optics	11w LED Module	5.0 lbs.
DL-43-LEDM1160-BRS	Brass Bullet, 60° Optics	11w LED Module	5.0 lbs.
DL-43-LEDM11WF-BRS	Brass Bullet, No Optics	11w LED Module	5.0 lbs.
DL-43-LEDM1115-COP	Copper Bullet, 15° Optics	11w LED Module	5.0 lbs.
DL-43-LEDM1140-COP	Copper Bullet, 40° Optics	11w LED Module	5.0 lbs.
DL-43-LEDM1160-COP	Copper Bullet, 60° Optics	11w LED Module	5.0 lbs.
DL-43-LEDM11WF-COP	Copper Bullet, No Optics	11w LED Module	5.0 lbs.



DL-42 | DL-43 | DL-45

Beam Type	Angle	Visual Indicator
Spot	15°	Red Dot
Flood	40°	Green Dot
Wide Flood	60°	Blue Dot

IP65



BEAM/GLARE CONTROL ACCESSORIES

FA-08-DL-42-21	Round 1/4" Hex Cell Louver
FA-35-DL-42-GREEN	Green Acrylic Insert Lens
FA-11-DL-42-BLUE	Blue Tempered Glass Insert Lens
FA-11-DL-42-GREEN	Light Green Tempered Glass Insert Lens
FA-11-DL-42-AMBER	Amber Tempered Glass Insert Lens
FA-11-DL-42-RED	Red Tempered Glass Insert Lens
FA-104-DL-42-SB	Wide Spread Sandblasted Glass Insert Lens Softener



JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.*
25301 COMMERCE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT



DIRECTIONAL LIGHTS

DL-43-LEDM11

TYPE

ORDERING INFORMATION - EXTERNAL DRIVERS

CATALOG NO.	DESCRIPTION
HW-12-60LED*	120v Input, 12v AC output LED Driver
HW-12-20MVLED*	90v-277v Input, 12v DC output LED Driver


*Must use FA-26 mounting post or junction box

HW-12-60LED | 2.25" (w) x 1.25" (h) x .75" (d)

HW-12-20MVLED | 6" (w) x 1.5" (h) x .1" (d)



MOUNTING ACCESSORIES

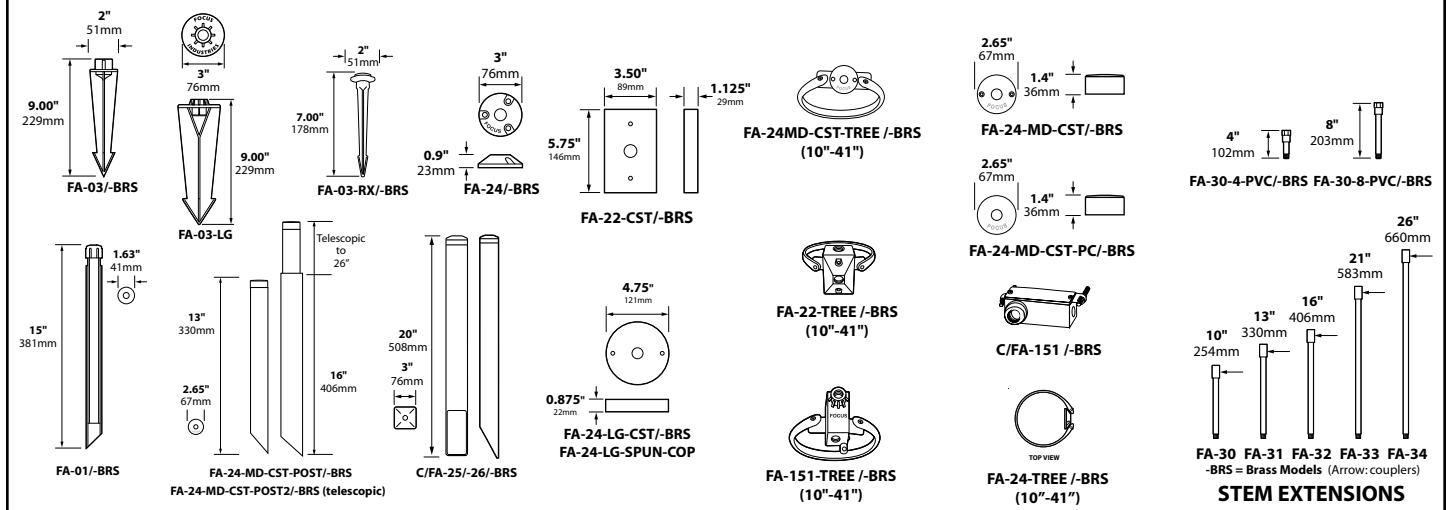

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

