



landscape • entertainment • architectural • hospitality • illumination



DL-44 SERIES DIRECTIONAL LIGHT





DIRECTIONAL LIGHTS DL-44 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Extruded 2.25" square aluminum or brass bullet; matching die cast adjustable swivel with 240° rotation

LENS: High impact clear tempered convex glass

GASKET: High temperature black silicone

LAMP SUPPLIED: 20w MR16 FL(BAB) 5000 hours average rating (50w max)

LAMP OPTIONS: We recommend 50,000 hour ARROW 4w LED (-LED) or 40,000 hour 5w (-LED5) or 7w (-LED7) ARROW Super Saver LED

SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires


WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

MOUNTING: FA-03 black 9" ABS stake threaded 1/2" NPS

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available.
Brass - Unfinished brass. Optional finishes available.

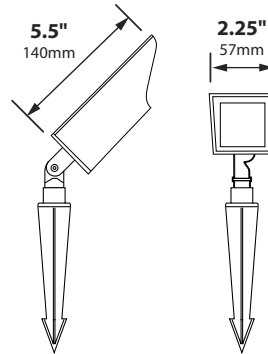


ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
DL-44-BLT	Square Aluminum Bullet	20w MR16 FL(BAB)	2.0 lbs.
DL-44-BRS	Square Brass Bullet	20w MR16 FL(BAB)	3.0 lbs.

IP65



MOUNTING ACCESSORIES

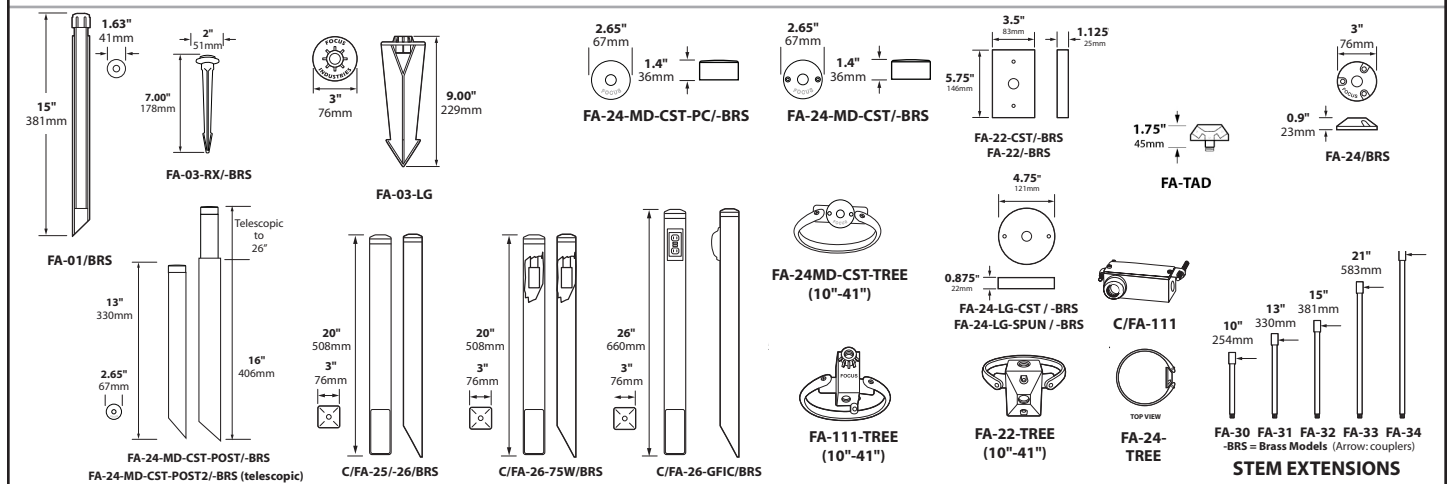

BEAM/GLARE CONTROL ACCESSORIES

FA-08-21	Round 1/4" Hex Cell Louver
FA-11-BLUE	Blue Tempered Glass Lens
FA-11-GREEN	Green Tempered Glass Lens
FA-11-AMBER	Amber Tempered Glass Lens
FA-11-RED	Red Tempered Glass Lens
FA-98	Linear Spread Tempered Glass Lens
FA-104-SB	Wide Spread Sandblasted Glass Lens Softener

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCE CENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT




DIRECTIONAL LIGHTS DL-44




TYPE


LIGHT DISTRIBUTIONS AND PHOTOMETRICS




FL-13W-FG

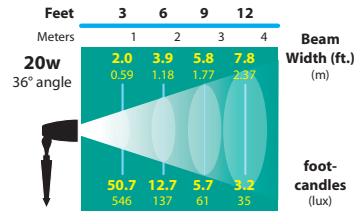


FL-13-BAB-FG




FL-13-ESX-FG




FL-13-VWFL-FG

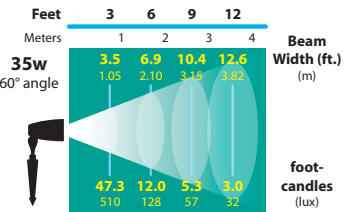


FL-15-FMW-60-FG




FL-15-FMW-FG
FL-15-FMW-ULTRA




FL-15-FMT-FG




FL-15-FMV-FG
FL-15-FMV-ULTRA

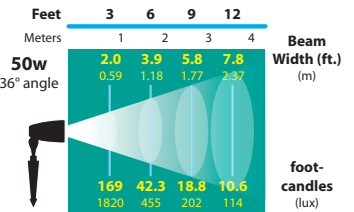


FL-10-EXN-FG
FL-10-EXN-ULTRA




FL-10-EXT-FG
FL-10-EXT-ULTRA




FL-10-VWFL-FG




FL-10-EXZ-ULTRA

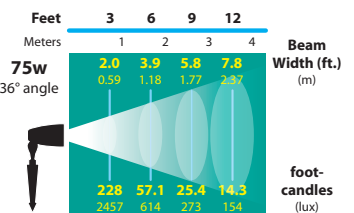


FL-13-EYC-FG



FL-20-EYF-FG

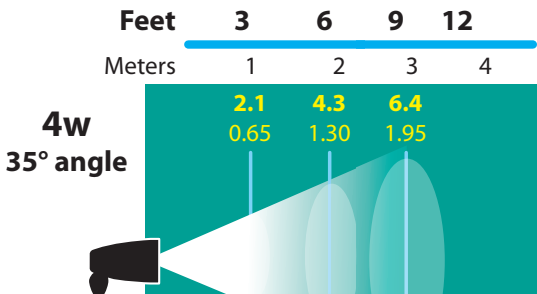

Beam Width (ft.) (m)

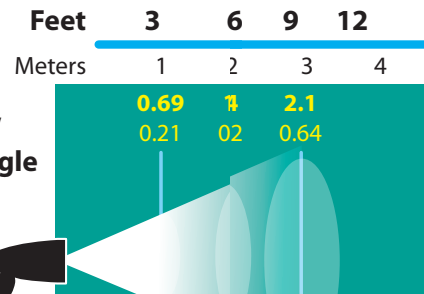

Beam Width (ft.) (m)

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT