



landscape • entertainment • architectural • hospitality • illumination

NEW

DL-44 SERIES DIRECTIONAL LIGHT



DL-44-BLT



DL-44-LED-BAR



DL-44-BLT



DL-44-LED-CAM



DIRECTIONAL LIGHTS DL-44 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Extruded 2.25" square aluminum or brass bullet; matching die cast adjustable swivel with 240° rotation

LENS: High impact clear tempered convex glass

GASKET: High temperature black silicone

LAMP SUPPLIED: 20w MR16 FL(BAB) 5000 hours average rating (50w max)

LAMP OPTIONS: We recommend 50,000 hour ARROW 4w LED (-LED) or 40,000 hour 5w (-LED5) or 7w (-LED7) ARROW Super Saver LED


SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)
For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

MOUNTING: FA-03 black 9" ABS stake threaded 1/2" NPS

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available.
Brass - Unfinished brass. Optional finishes available.

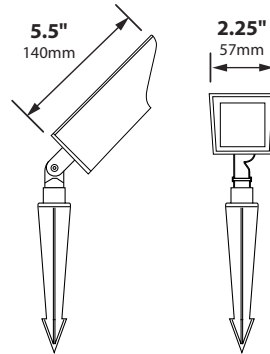

IP65



ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
DL-44-BLT	Square Aluminum Bullet	20w MR16 FL(BAB)	2.0 lbs.
DL-44-BRS	Square Brass Bullet	20w MR16 FL(BAB)	3.0 lbs.

MOUNTING ACCESSORIES

FA-01/BRS 15" 381mm

FA-03-RX/-BRS 1.63" 41mm, 2" 51mm, 7.00" 178mm

FA-03-LG 8.875" 225mm

FA-24-MD-CST/-BRS 2.65" 67mm, 1.4" 36mm

FA-24MD-CST-TREE (10"-41")

FA-22-CST/-BRS 3.5" 89mm, 1.125" 28mm, 5.75" 146mm

FA-TAD 1.75" 45mm

FA-24/BRS 3" 76mm, 0.9" 23mm

C/FA-111

FA-24-MD-CST-POST/-BRS 13" 330mm, 2.65" 67mm

C/FA-25/-26/BRS Telescopic to 26", 20" 508mm, 3" 76mm

C/FA-26-75W/BRS 20" 508mm, 3" 76mm

C/FA-26-GFIC/BRS 26" 660mm, 3" 76mm

FA-24-LG-DH-SPUN/-BRS 4.75" 121mm, 0.875" 22mm

FA-24-LG-CST / -BRS 4.75" 121mm, 0.875" 22mm

FA-111-TREE (10"-41")

FA-22-TREE (10"-41")

FA-24-TREE TOP VIEW

STEM EXTENSIONS
FA-30 10" 254mm
FA-31 13" 330mm
FA-32 15" 381mm
FA-33 21" 533mm
FA-34 21" 533mm
 -BRS = Brass Models (Arrow: couplers)

BEAM/GLARE CONTROL ACCESSORIES

FA-08-21	Round 1/4" Hex Cell Louver
FA-98	Linear Spread Tempered Glass Lens
FA-104-SB	Wide Spread Sandblasted Glass Lens Softener

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT