



SURFACE STEP LIGHTS PL-24-18 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Single or double cast aluminum fixture(s) on a 52" galvanized steel 2"x4" post

LENS: None

LAMP SUPPLIED: 18w S8 #1141; 1200 hours average rating (25w max.)

LAMP OPTIONS: We recommend 10,000 hours average rating Xenon (-X) or Halogen (-H) or 3w 50,000 hours average rating OMNI-3 LED (-LED3)
120v: 15w T7 or 25w T8

SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v, both with 200°C silicone lead wires

WIRING: Black 5 foot 18/2 zip cord from base of fixture (12v only)
For 25 foot 16/2 fixture lead wire add -25F to catalog number.
120v Standard wiring

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable
(12/2, 10/2 or 8/2 only) 12v only

MOUNTING: None

FINISH: Black texture polyester powder coat. Optional finishes available


ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
PL-24-181BLT	Cast Aluminum Surface Light 52" Post	18w S8 #1141	10.0 lbs.
PL-24-182BLT	2x Cast Aluminum Surface Lights 52" Post	18w S8 #1141	12.0 lbs.



PL-24-18-BRT

PL-24-182-BRT

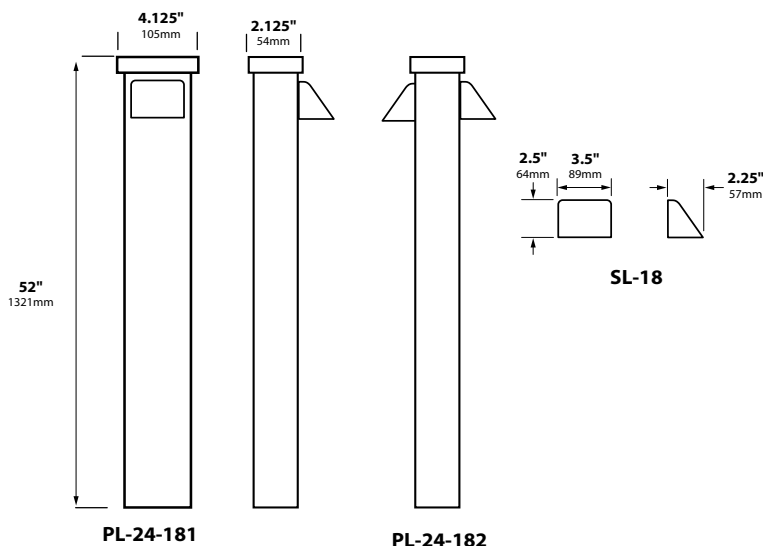

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT