



landscape • entertainment • architectural • hospitality • illumination

SL-20-SM-M WELL LIGHTS



25301 COMMERCENTRE DRIVE • LAKE FOREST, CA 92630 • 949.830.1350 • 888.882.1350 • FAX 949.830.3390



MARKER LIGHT SL-20-SMM SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION:

BODY: Fiberglass reinforced bronze composite with molded brass inserts for screws

MARKER DOME: Cast aluminum or cast brass:

Overall cover height is 1.25", it is .875" from top of screw ledge

LENS: High impact clear tempered convex glass

O-RING: High temperature red silicone

REFLECTOR: Highly polished specular aluminum

12v LAMP SUPPLIED: 20w MR16 FL(BAB) 5000 hours average rating (50w max)

12v LAMP OPTIONS: We recommend ARROW 4w LED (-LED) or 6w LED (-LED6W); 50,000 hour or ARROW SAVER 4w LED (-LAS); 40,000 hour

12v SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

12v WIRING: Black 4 foot 18/2 zip cord from base of fixture

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

120v LAMP SUPPLIED: None, use only outdoor rated PAR20 lamps

120v LAMP OPTIONS: We recommend 9w ARROW LED PAR20 50,000 hours average rating

120v SOCKET: High temperature ceramic medium base with 250°C silicone lead wires

120v WIRING: Standard 120v Black, White and Ground 9" lead wires

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable


(12/2, 10/2 or 8/2 only) 12v only

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available

Brass - Unfinished brass. Optional finishes available




SL-20-SMMR16-CPR



TOP VIEW


ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP SUPPLIED	SHIP WEIGHT
SL-20-SMMMR16-BLT	Well Light, Aluminum Marker	20w MR16 FL(BAB)	2.0 lbs.
SL-20-SMMMR16-BRS	Well Light, Brass Marker	20w MR16 FL(BAB)	3.0 lbs.
SL-20-SMMNL120V-BLT	Well Light, Aluminum Marker	None	2.0 lbs.
SL-20-SMMNL120V-BRS	Well Light, Brass Marker	None	3.0 lbs.



BOTTOM
2 Female 1/2" NPS threaded
ports available upon request

LIGHT DISTRIBUTION

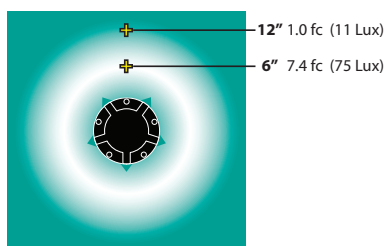

SL-20-SMM
Light Distribution

ACCESSORIES

CATALOG NO.	DESCRIPTION
FA-08-06	Round 1/4" Mini Hex Cell Louver
FA-10-SL20SMAMBER	Flat Amber Tempered Glass Lens
FA-10-SL20SMBLUE	Flat Blue Tempered Glass Lens
FA-10-SL20SMGREEN	Flat Green Tempered Glass Lens
FA-10-SL20SMRED	Flat Red Tempered Glass Lens
FA-FORM-SL20SM	Concrete form for SL-20-SM Series

IP65



JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT