

SL-35 SURFACE LIGHTS

 $\textbf{landscape} \cdot \textbf{entertainment} \cdot \textbf{architectural} \cdot \textbf{hospitality} \cdot \textbf{\textit{illumination}}$











SURFACE STEP LIGHTS SL-35 SERIES



SPECIFICATIONS

SL-35

CONSTRUCTION: 2.5" x 3.5" stamped Brass or Copper with matching mounting plate.

LENS: None

LAMP SUPPLIED: 18w S8 #1141; 1200 hours average rating (25w max.) LAMP OPTIONS: We recommend 10,000 hours average rating Xenon (-X) or Halogen (-H) or 3w 50,000 hours average rating OMNI-3 LED (-LED3)

SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s)

WIRING: Black 5 foot 18/2 zip cord from base of fixture (12v only) For 25 foot 16/2 fixture lead wire add -25F to catalog number. MOUNTING: Surface mounting plate with hardware included FINISH: Unfinished brass or copper. Optional finishes available

SL-35-SM

CONSTRUCTION: Small 2.125" x 3" stamped Brass only

LENS: None

LAMP SUPPLIED: 10w T3 G4 Bi-Pin Halogen; 2000 hours average rating (20w max.)

LAMP OPTIONS: 20w T3 G4 Bi-Pin Xenon; 5000 hours average rating (-X)

SOCKET: G4 Bi-Pin only

WIRING: Black 5 foot 18/2 zip cord from base of fixture (12v only) For 25 foot 16/2 fixture lead wire add -25F to catalog number. MOUNTING: Surface mounting plate with hardware included FINISH: Unfinished brass. Optional finishes available

SL-35-SM2

CONSTRUCTION: Small & Slim 1.75" x 3.5" stamped Aluminum or Brass

LENS: None

LAMP SUPPLIED: 18w S8 #1141; 1200 hours average rating (25w max.) LAMP OPTIONS: We recommend 10,000 hours average rating Xenon (-X) or Halogen (-H) or 3w 50,000 hours average rating OMNI-3 LED (-LED3)

SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s)

WIRING: Black 5 foot 18/2 zip cord from base of fixture (12v only) For 25 foot 16/2 fixture lead wire add -25F to catalog number.

MOUNTING: Surface mount with hardware included

FINISH: Aluminum - Black Texture Powder Coat. Optional finishes available

Brass - Unfinished. Optional finishes available

2.5" **SL-35**

SL-35-CAR



3.00"

76mm

2.5"

64mm

SL-35-SM



SL-35-SM-BRS




SL-35-SM2BLT

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT		
SL-35-BRS	Brass Surface Step Light	18w S8 #1141	1.0 lbs.		
SL-35-COP	Copper Surface Step Light	18w S8 #1141	1.0 lbs.		
SL-35-SMBRS	Small Brass Surface Step Light	10w T3 G4 bi-pin	1.0 lbs.		
SL-35-SM2BLT	Small Aluminum Surface Step Light	18w S8 #1141	1.0 lbs.		
SL-35-SM2BRS	Small Brass Surface Step Light	18w S8 #1141	1.0 lbs.		

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

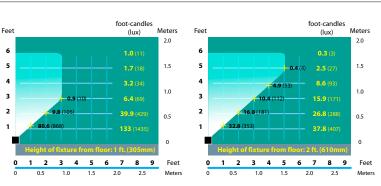

SL-35 Half Spread Photometrics **SL-35** Half Spread Photometrics

	Intertek
JOB INFORMATION	
Туре:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	
FOCUS INDUSTRIES INC. 25301 COMMERCENTRE DRIVE LAKE FOREST, CA 92630	www.focusindustries.com sales@focusindustries.com (949) 830-1350 • FAX (949) 830-3390

ĺ	Black Texture	Antique	Bronze	Camel	White	Hunter	Rust	Weathered		Stucco	Rubbed	Chrome		Acid	Acid	Black Acid
	(Standard)	Verde	Texture		Texture	Texture		Iron	Brown		Verde	Powder	,	Rust	Verde	Treatment
	-BLT	-ATV	-BRT	-CAM	-WTX	-нтх	-RST	-WIR	-WBR	-STU	-RBV	-CPR		-BAR/CAR	-BAV/CAV	-BAT
CL 25 C + CL									2016							

SL-35 Cut Sheet 020816 BRASS & COPPER ONLY

C E . (II)