






# SLS-02 SERIES SIGN LIGHT


**TYPE**

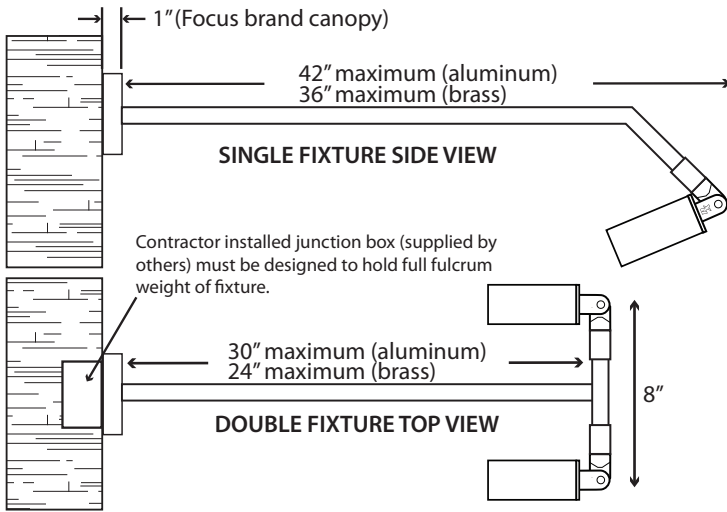

**CAP STYLES**



**CANOPY STYLES**

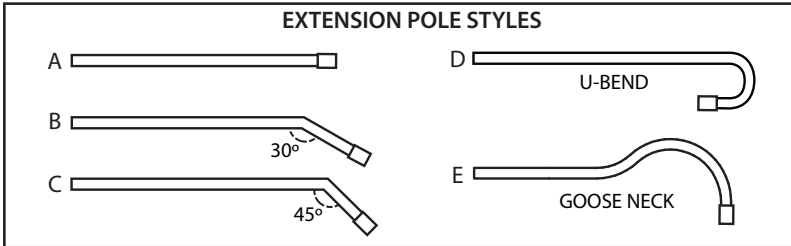

**EXTENSION POLE STYLES**

## SPECIFICATIONS

**Aluminum:** Die cast bullet and adjustable die cast 240° swivel\*; extruded aluminum extension pole

**Copper:** Unfinished copper bullet; adjustable die cast brass swivel; die cast brass canopy; copper or brass extruded extension pole

**Max Wattage:** Aluminum 50w / Copper 35w

**Lamp Options:** MR16, MR16 LED

### Socket:

12v - High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

### Wiring:

12v - Black 18/2 SPT-1W 8" from base of fixture

### Power Supply:

12v - Remote 12v transformer or internal hard wire transformer (not included)

**Finish:** See color options in ordering information below

**\* NOTE: 45° bend required for full rotation of single fixture towards wall. Consult factory for other swivel options.**

IP54

SLS-02-		1	2	3	4	5	6	7	8	9	10	11		
<b>ORDERING INFORMATION</b>	<b>1. MATERIAL</b> A: ALUMINUM D: COPPER/BRASS POLE			2: FLAT								E: GOOSE NECK (PROVIDE SPEC) F: CUSTOM BEND (PROVIDE SPEC)	CUSTOM COLORS AVAILABLE	
	<b>2. FIXTURE TYPE</b> 1: SINGLE 2: DOUBLE													
	<b>3. LIGHT SOURCE</b> NL: NO LAMP, BI PIN SOCKET 01: 20W FL(BAB) 36° 07: 35W FL(FMW) 36° 16: 50W FL(EXN) 36° 31: 3W ARROW SUPER SAVER MR16 15° 32: 3W ARROW SUPER SAVER MR16 36° 33: 3W ARROW SUPER SAVER MR16 80° 34: 5W ARROW SUPER SAVER MR16 15° 35: 5W ARROW SUPER SAVER MR16 36° 36: 5W ARROW SUPER SAVER MR16 80° 37: 7W ARROW SUPER SAVER MR16 15° 38: 7W ARROW SUPER SAVER MR16 36° 39: 7W ARROW SUPER SAVER MR16 80°													
	<b>4. CAP STYLE</b> B: FLAT CAP C: TUBE SHIELD													
	<b>5. LENS TYPE</b> 1: CONVEX													
					<b>6. LENS ENHANCEMENT</b> 0: NO LENS ENHANCEMENT A: LINEAR SPREAD B: WIDE SOFTENER C: BLUE D: GREEN									
					<b>7. GLARE SHIELDING</b> 0: NO SHIELDING H: HEX CELL LOUVER									
					<b>8. EXTENSION POLE LENGTH</b> 12: 12 INCHES 18: 18 INCHES 24: 24 INCHES (MAX BRASS DOUBLE) 30: 30 INCHES (MAX ALUM DOUBLE) 36: 36 INCHES (SINGLE ONLY, MAX BRSS) 42: 42 INCHES (ALUMINUM ONLY) CUSTOM: LIST # OF INCHES									
					<b>9. EXTENSION POLE STYLE</b> A: STRAIGHT B: 30° BEND C: 45° BEND D: U BEND (PROVIDE SPEC)									
									<b>10. CANOPY</b> 0: NO CANOPY (1/2" NPS REQUIRED) 1: FA-24-LG-CST ALUM ROUND 2: FA-24-LG-CST BRASS ROUND 3: FA-22-CST ALUM RECTANGLE 4: FA-22-CST BRASS RECTANGLE					
										<b>11. COLOR</b> BLT: BLACK TEXTURE (STANDARD) ATV: ANTIQUE VERDE BLK: BLACK GLOSS BRT: BRONZE TEXTURE CAM: CAMEL TONE CPR: CHROME POWDER HTX: HUNTER TEXTURE RBV: RUBBED VERDE RST: RUST STU: STUCCO WBR: WEATHERED BROWN WIR: WEATHERED IRON WHT: WHITE GLOSS WTX: WHITE TEXTURE COP: UNFINISHED COPPER CAR: COPPER ACID RUST CAV: COPPER ACID VERDE BAT: BLACKACID TREATMENT				