






SLS-08 SERIES SIGN LIGHT

TYPE

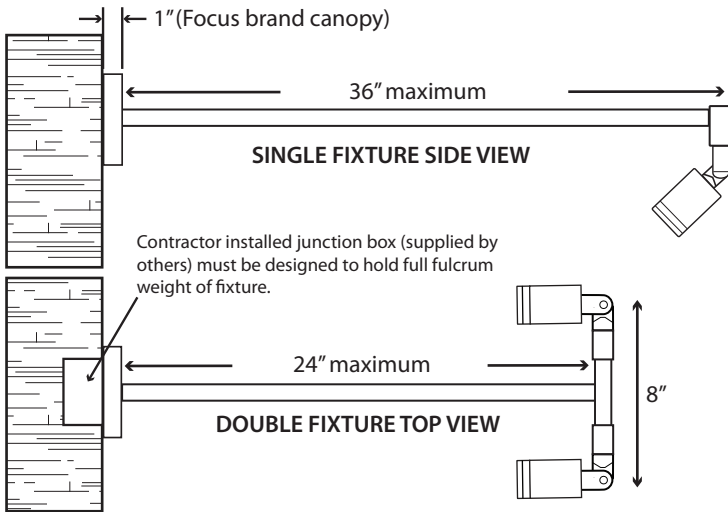

CAP STYLE



CANOPY STYLES

SPECIFICATIONS

Machined brass cylinder & threaded cap with adjustable die cast 240° swivel; extruded brass extension pole

Max Wattage: 50w

Lamp Options: MR16, MR16 LED

Socket:

12v - High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

Wiring:

12v - Black 18/2 SPT-1W 8" from base of fixture


Power Supply:

12v - Remote 12v transformer or internal hard wire transformer (not included)

Finish: See color options in ordering information below

IP54

EXTENSION POLE STYLES

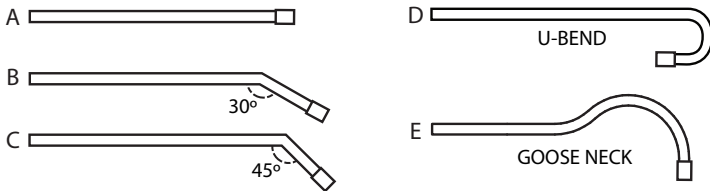

ORDERING INFORMATION

SLS-08- _____ 1 - _____ 2 - _____ 3 - _____ 4 - _____ 5 - _____ 6 - _____ 7 - _____ 8 - _____ 9 - _____ 10 - _____ 11

ORDERING INFORMATION	1. MATERIAL B: BRASS	2: FLAT LENS 3: STEPPED FLAT LENS	E: GOOSE NECK (PROVIDE SPEC) F: CUSTOM BEND (PROVIDE SPEC)	CUSTOM COLORS AVAILABLE
	2. FIXTURE TYPE 1: SINGLE 2: DOUBLE	6. LENS ENHANCEMENT 0: NO LENS ENHANCEMENT A: LINEAR SPREAD B: WIDE SOFTENER C: BLUE D: GREEN	10. CANOPY 0: NO CANOPY (1/2" NPS REQUIRED) 2: FA-24-LG-CST BRASS ROUND 4: FA-22-CST BRASS RECTANGLE	
	3. LIGHT SOURCE NL: NO LAMP, BI PIN SOCKET 01: 20W FL(BAB) 36° 07: 35W FL(FMW) 36° 16: 50W FL(EXN) 36° 30: 3W ARROW SUPER SAVER MR16 15° 31: 3W ARROW SUPER SAVER MR16 36° 32: 3W ARROW SUPER SAVER MR16 80° 33: 5W ARROW SUPER SAVER MR16 15° 34: 5W ARROW SUPER SAVER MR16 36° 35: 5W ARROW SUPER SAVER MR16 80° 36: 7W ARROW SUPER SAVER MR16 15° 37: 7W ARROW SUPER SAVER MR16 36° 38: 7W ARROW SUPER SAVER MR16 80°	7. GLARE SHIELDING 0: NO SHIELDING H: HEX CELL LOUVER	11. COLOR BLT: BLACK TEXTURE (STANDARD) ATV: ANTIQUE VERDE BLK: BLACK GLOSS BRT: BRONZE TEXTURE CAM: CAMEL TONE CPR: CHROME POWDER HTX: HUNTER TEXTURE RBV: RUBBED VERDE RST: RUST STU: STUCCO WBR: WEATHERED BROWN WIR: WEATHERED IRON WHT: WHITE GLOSS WTX: WHITE TEXTURE BRS: UNFINISHED BRASS BAR: BRASS ACID RUST BAV: BRASS ACID VERDE BAT: BLACK ACID TREATMENT	
	4. CAP STYLE A: ANGLE CAP (available January 2015) B: FLAT CAP	8. EXTENSION POLE LENGTH 12: 12 INCHES 18: 18 INCHES 24: 24 INCHES (MAX DOUBLE) 30: 30 INCHES (SINGLE ONLY) 36: 36 INCHES (MAX SINGLE) CUSTOM: LIST # OF INCHES		
	5. LENS TYPE	9. EXTENSION POLE STYLE A: STRAIGHT B: 30° BEND C: 45° BEND D: U BEND (PROVIDE SPEC)		