




SLS-17 SERIES SIGN LIGHT

TYPE

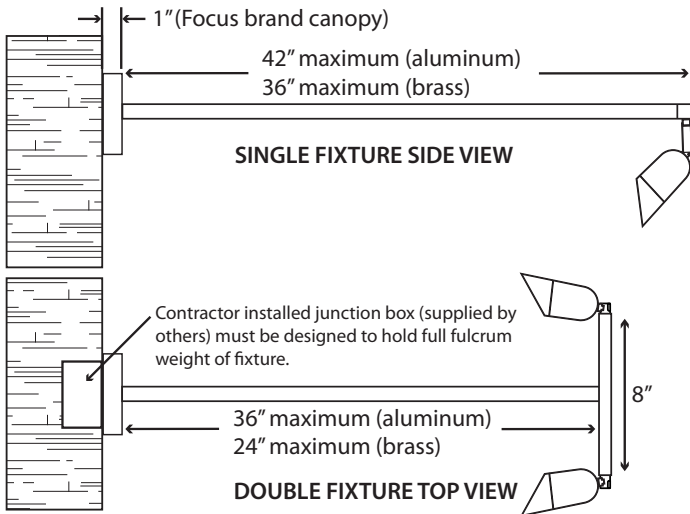

SPECIFICATIONS

Aluminum: Die cast bullet and canopy; adjustable die cast 360° swivel; extruded aluminum extension pole
Brass: Die cast bullet and canopy; adjustable die cast 360° swivel; extruded brass extension pole

Max Wattage: 35w

Lamp Options: MR11, ALR12

Socket:

12v - High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires


Wiring:

12v - Black 18/2 SPT-1W 8" from base of fixture


Power Supply:

12v - Remote 12v transformer or internal hard wire transformer (not included)


Finish: See color options in ordering information below



CAP STYLES



CANOPY STYLES

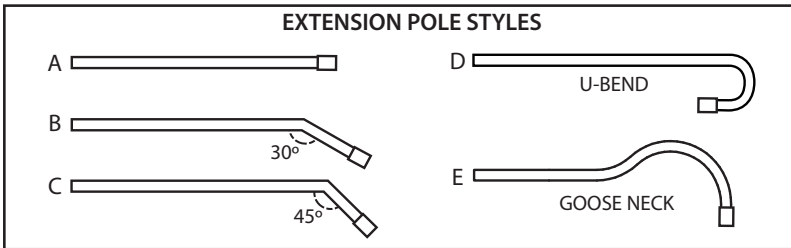

EXTENSION POLE STYLES



ORDERING INFORMATION	SLS-17- _____										
	1	2	3	4	5	6	7	8	9	10	11
1. MATERIAL A: ALUMINUM B: BRASS	4. CAP STYLE A: ANGLE CAP B: FLAT CAP		8. EXTENSION POLE LENGTH 12: 12 INCHES 18: 18 INCHES 24: 24 INCHES 30: 30 INCHES 36: 36 INCHES 42: 42 INCHES CUSTOM: LIST # OF INCHES				11. COLOR BLT: BLACK TEXTURE (STANDARD) ATV: ANTIQUE VERDE BLK: BLACK GLOSS BRT: BRONZE TEXTURE CAM: CAMEL TONE CPR: CHROME POWDER HTX: HUNTER TEXTURE RBV: RUBBED VERDE RST: RUST STU: STUCCO WBR: WEATHERED BROWN WIR: WEATHERED IRON WHT: WHITE GLOSS WTX: WHITE TEXTURE BRS: UNFINISHED BRASS BAR: BRASS ACID RUST BAV: BRASS ACID VERDE BAT: BRASS BLACK ACID CUSTOM COLORS AVAILABLE				
2. FIXTURE TYPE 1: SINGLE 2: DOUBLE	5. LENS TYPE 1: CONVEX 2: FLAT		9. EXTENSION POLE STYLE A: STRAIGHT B: 30° BEND C: 45° BEND D: U BEND (PROVIDE SPEC) E: GOOSE NECK (PROVIDE SPEC) F: CUSTOM BEND (PROVIDE SPEC)								
3. LIGHT SOURCE NL: NO LAMP, BI PIN SOCKET 01: 20W FL(FTD) 30° 02: 20W FL ULTRA 30° 10,000 HOUR 03: 20W SP(FTB) 10° 04: 35W FL(FTH) 30° 05: 35W SP(FTE) 10° 06: 20W ALR12 FL(GBF) 32° 07: 20W ALR12 NFL(GBE) 18° 08: 20W ALR12 SP(GBD) 6° 09: 2W ARROW LED MR11 SP 15° 10: 2W ARROW LED MR11 FL 40°	6. LENS ENHANCEMENT 0: NO LENS ENHANCEMENT A: LINEAR SPREAD B: WIDE SOFTENER C: BLUE D: GREEN		7. GLARE SHIELDING 0: NO SHIELDING H: HEX CELL LOUVER								