




# SLS-20 SERIES SIGN LIGHT

**TYPE**

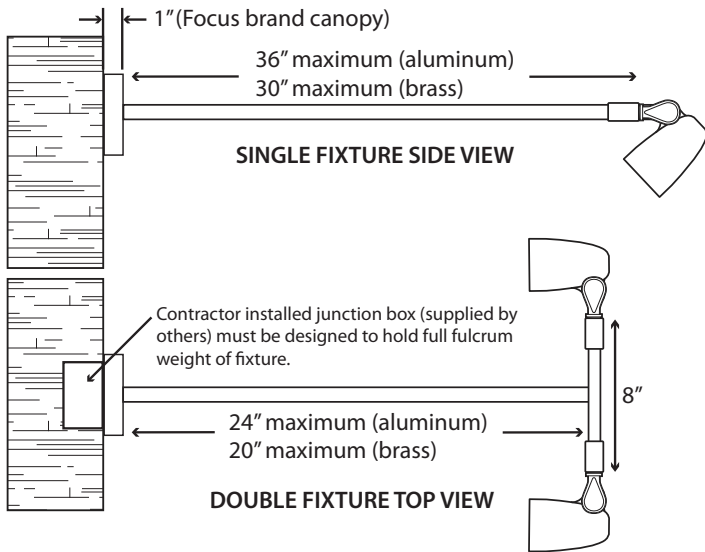

## SPECIFICATIONS

**Aluminum:** Die cast bullet and canopy; adjustable die cast swivel; extruded aluminum extension pole  
**Brass:** Die cast bullet and canopy; adjustable die cast swivel; extruded brass extension pole

**Max Wattage:** 50w (both 12v and 120v)

**Lamp Options:** PAR20, PAR20 HID, MR16, MR16 LED

### Socket:

12v - High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires  
 120v - High temperature brass nickel plated medium base with 150°C silicone lead wires  
 120v - GU10 B-Pin Socket  
 H. I. D. - Medium base high temperature 600v, 660w, 4K. V. pulse rated Brass nickel plate screw shell with 150°C silicone lead wires

### Wiring:


12v - Black 18/2 SPT-1W 8" from base of fixture  
 120v - Standard 120v black, white & green

### Power Supply:


12v - Remote 12v transformer or internal hard wire transformer (not included)  
 120v - No transformer required  
 H.I.D. - Requires remote ballast

**Finish:** See color options in ordering information below

IP55 (with cap)




**CAP STYLES**



**CANOPY STYLES**

## EXTENSION POLE STYLES

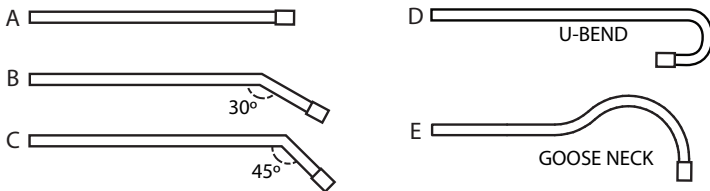

**SLS-20-** \_\_\_\_\_  
 1      2      3      4      5      6      7      8      9      10      11

**ORDERING INFORMATION**

- |  |   |  |
|--|---|--|
| <p><b>1. MATERIAL</b><br/>         A: ALUMINUM<br/>         B: BRASS</p> <p><b>2. FIXTURE TYPE</b><br/>         1: SINGLE<br/>         2: DOUBLE</p> <p><b>3. LIGHT SOURCE</b><br/>         NL: NO LAMP, BI PIN SOCKET<br/>         N2: NO LAMP, D.C. SOCKET<br/>         N3: NO LAMP, MED BASE SOCKET<br/>         N4: NO LAMP, 4K.V. PULSE RATED SOCKET<br/>         N5: NO LAMP, GU10 BI-PIN SOCKET<br/>         01: 20W FL(BAB) 36°<br/>         07: 35W FL(FMW) 36°<br/>         16: 50W FL(EXN) 36°<br/>         40: 12v 3W ARROW SUPER SAVER MR16 15°<br/>         41: 12v 3W ARROW SUPER SAVER MR16 36°<br/>         42: 12v 3W ARROW SUPER SAVER MR16 80°<br/>         43: 12v 5W ARROW SUPER SAVER MR16 15°<br/>         44: 12v 5W ARROW SUPER SAVER MR16 36°<br/>         45: 12v 5W ARROW SUPER SAVER MR16 80°<br/>         46: 12v 7W ARROW SUPER SAVER MR16 15°<br/>         47: 12v 7W ARROW SUPER SAVER MR16 36°<br/>         48: 12v 7W ARROW SUPER SAVER MR16 80°<br/>         49: 120v 3W ARROW SUPER SAVER MR16 15°<br/>         50: 120v 3W ARROW SUPER SAVER MR16 36°<br/>         51: 120v 3W ARROW SUPER SAVER MR16 80°<br/>         52: 120v 5W ARROW SUPER SAVER MR16 15°<br/>         53: 120v 5W ARROW SUPER SAVER MR16 36°<br/>         54: 120v 5W ARROW SUPER SAVER MR16 80°<br/>         55: 120v 7W ARROW SUPER SAVER MR16 15°</p> | <p>56: 120v 7W ARROW SUPER SAVER MR16 36°<br/>         57: 120v 7W ARROW SUPER SAVER MR16 80°<br/>         58: 120v 8W ARROW SUPER SAVER PAR20 15°<br/>         58: 120v 8W ARROW SUPER SAVER PAR20 40°</p> <p><b>4. CAP STYLE</b><br/>         0: NO CAP (PAR 20 HALOGEN ONLY)<br/>         A: EXTENSION CAP<br/>         B: ANGLE CAP</p> <p><b>5. LENS TYPE</b><br/>         0: NO LENS (PAR 20 HALOGEN ONLY)<br/>         1: CONVEX<br/>         2: FLAT</p> <p><b>6. LENS ENHANCEMENT</b><br/>         0: NO LENS ENHANCEMENT<br/>         A: LINEAR SPREAD<br/>         B: WIDE SOFTENER<br/>         C: BLUE<br/>         D: GREEN</p> <p><b>7. GLARE SHIELDING</b><br/>         0: NO SHIELDING<br/>         H: HEX CELL LOUVER</p> <p><b>8. EXTENSION POLE LENGTH</b><br/>         12: 12 INCHES<br/>         18: 18 INCHES<br/>         24: 24 INCHES (MAX FOR DOUBLE)<br/>         30: 30 INCHES (SINGLE ONLY, MAX BRS)<br/>         36: 36 INCHES (ALUMINUM ONLY)<br/>         CUSTOM: LIST # OF INCHES</p> | <p><b>9. EXTENSION POLE STYLE</b><br/>         A: STRAIGHT<br/>         B: 30° BEND<br/>         C: 45° BEND<br/>         D: U BEND (PROVIDE SPEC)<br/>         E: GOOSE NECK (PROVIDE SPEC)<br/>         F: CUSTOM BEND (PROVIDE SPEC)</p> <p><b>10. CANOPY</b><br/>         0: NO CANOPY (1/2" NPS REQUIRED)<br/>         1: FA-24-LGCST ALUM ROUND<br/>         2: FA-24-LGCST BRASS ROUND<br/>         3: FA-22-CST ALUM RECTANGLE<br/>         4: FA-22-CST BRASS RECTANGLE</p> <p><b>11. COLOR</b><br/>         BLT: BLACK TEXTURE (STANDARD)<br/>         ATV: ANTIQUE VERDE<br/>         BLK: BLACK GLOSS<br/>         BRT: BRONZE TEXTURE<br/>         CAM: CAMEL TONE<br/>         CPR: CHROME POWDER<br/>         HTX: HUNTER TEXTURE<br/>         RBV: RUBBED VERDE<br/>         RST: RUST<br/>         STU: STUCCO<br/>         WBR: WEATHERED BROWN<br/>         WIR: WEATHERED IRON<br/>         WHT: WHITE GLOSS<br/>         WTX: WHITE TEXTURE</p> <p>BRS: UNFINISHED BRASS<br/>         BAR: BRASS ACID RUST<br/>         BAV: BRASS ACID VERDE<br/>         BAT: BRASS BLACK ACID<br/>         CUSTOM COLORS AVAILABLE</p> |
|--|---|--|