




SLS-20 SERIES SIGN LIGHT

TYPE

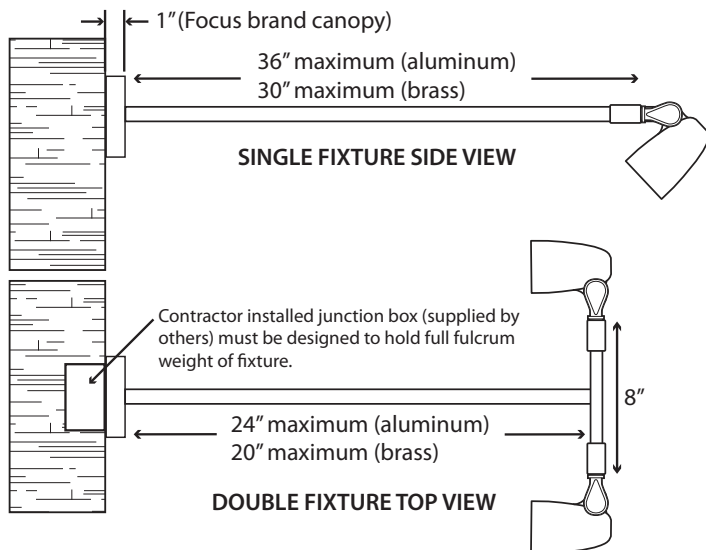

SPECIFICATIONS

Aluminum: Die cast bullet and canopy; adjustable die cast swivel; extruded aluminum extension pole
Brass: Die cast bullet and canopy; adjustable die cast swivel; extruded brass extension pole

Max Wattage: 50w (both 12v and 120v)

Lamp Options: PAR20, PAR20 HID, MR16, MR16 LED, AR70

Socket:

12v - High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires
120v - High temperature brass nickel plated medium base with 150°C silicone lead wires
H. I. D. - Medium base high temperature 600v, 660w, 4K. V. pulse rated Brass nickel plate screw shell with 150°C silicone lead wires

Wiring:

12v - Black 18/2 SPT-1W 8" from base of fixture
120v - Standard 120v black, white & green

Power Supply:

12v - Remote 12v transformer or internal hard wire transformer (not included)
120v - No transformer required
H.I.D. - Requires remote ballast

Finish: See color options in ordering information below

IP55 (with cap)



SLS-20- 1 2 3 4 5 6 7 8 9 10 11

ORDERING INFORMATION

1. MATERIAL

A: ALUMINUM
B: BRASS

2. FIXTURE TYPE

1: SINGLE
2: DOUBLE

3. LIGHT SOURCE

NL: NO LAMP, BI PIN SOCKET
N2: NO LAMP, D.C. SOCKET
N3: NO LAMP, MED BASE SOCKET
N4: NO LAMP, 4K.V. PULSE RATED SOCKET
01: 20W FL(BAB) 36°
02: 20W FL(BAB) 36° ULTRA 10K HOUR
03: 20W FL(BAB) 36° TITAN 12K HOUR
04: 20W NFL(BBF) 24° TITAN 12K HOUR
05: 20W SP(ESX) 12°
06: 20W VWFL(BAB) 60°
07: 35W FL(FMW) 36°
08: 35W FL(FMW) 36° ULTRA 10K HOUR
09: 35W FL(FMW) 36° TITAN 18K HOUR
10: 35W NFL(FMV) 24°
11: 35W NFL(FMV) 24° ULTRA 10K HOUR
12: 35W NFL(FMV) 24° TITAN 18K HOUR
13: 35W SP(FMT) 12°
14: 35W VWFL(FMW) 60°
15: 35W WF(FMW) 60° TITAN 18K HOUR
16: 50W FL(EXN) 36°
17: 50W FL(EXN) 36° ULTRA 10K HOUR
18: 50W FL(EXN) 36° TITAN 18K HOUR

19: 50W NFL(EXZ) 24° ULTRA 10K HOUR
20: 50W NFL(EXZ) 24° TITAN 18K HOUR
21: 50W SP(EXT) 12°
22: 50W SP(EXT) 12° ULTRA 10K HOUR
23: 50W SP(EXT) 12° TITAN 18K HOUR
24: 50W VWFL(FNV) 60°
25: 50W VWFL(FNV) 60° TITAN 18K HOUR
26: 4W ARROW LED (BAB) 35°
27: 4W ARROW LED (ESX) 12°
28: 4W SAVER MR16 LED 40°
29: 4W SAVER MR16 LED 15°
30: 20W AR70 FL 25°
31: 20W AR70 SP 8°
32: 50W AR70 FL 25°
33: 50W AR70 FL 8°
34: 4W 120V ARROW LED (BAB) 35°
35: 4W 120V ARROW LED (ESX) 12°
36: N/A (FOR FUTURE USE)
37: N/A (FOR FUTURE USE)
38: 9W 120V PAR20 ARROW LED 15°
39: 9W 120V PAR20 ARROW LED 40°

4. CAP STYLE

0: NO CAP (PAR 20 HALOGEN ONLY)
A: EXTENSION CAP
B: ANGLE CAP

5. LENS TYPE

0: NO LENS (PAR 20 HALOGEN ONLY)
1: CONVEX
2: FLAT

6. LENS ENHANCEMENT

0: NO LENS ENHANCEMENT
A: LINEAR SPREAD
B: WIDE SOFTENER
C: BLUE
D: GREEN

7. GLARE SHIELDING

0: NO SHIELDING
H: HEX CELL LOUVER

8. EXTENSION POLE LENGTH

12: 12 INCHES
18: 18 INCHES
24: 24 INCHES (MAX FOR DOUBLE)
30: 30 INCHES (SINGLE ONLY, MAX BRS)
36: 36 INCHES (ALUMINUM ONLY)
CUSTOM: LIST # OF INCHES

9. EXTENSION POLE STYLE

A: STRAIGHT
B: 30° BEND
C: 45° BEND
D: U BEND (PROVIDE SPEC)
E: GOOSE NECK (PROVIDE SPEC)
F: CUSTOM BEND (PROVIDE SPEC)

10. CANOPY

0: NO CANOPY (1/2" NPS REQUIRED)
1: FA-24-LGCST ALUM ROUND
2: FA-24-LGCST BRASS ROUND
3: FA-22-CST ALUM RECTANGLE
4: FA-22-CST BRASS RECTANGLE

11. COLOR

BLT: BLACK TEXTURE (STANDARD)
ATV: ANTIQUE VERDE
BLK: BLACK GLOSS
BRT: BRONZE TEXTURE
CAM: CAMEL TONE
CPR: CHROME POWDER
HTX: HUNTER TEXTURE
RBV: RUBBED VERDE
RST: RUST
STU: STUCCO
WBR: WEATHERED BROWN
WIR: WEATHERED IRON
WHT: WHITE GLOSS
WTX: WHITE TEXTURE
BRS: UNFINISHED BRASS
BAR: BRASS ACID RUST
BAV: BRASS ACID VERDE
BAT: BRASS BLACK ACID
CUSTOM COLORS AVAILABLE