




SLS-22 SERIES SIGN LIGHT

TYPE

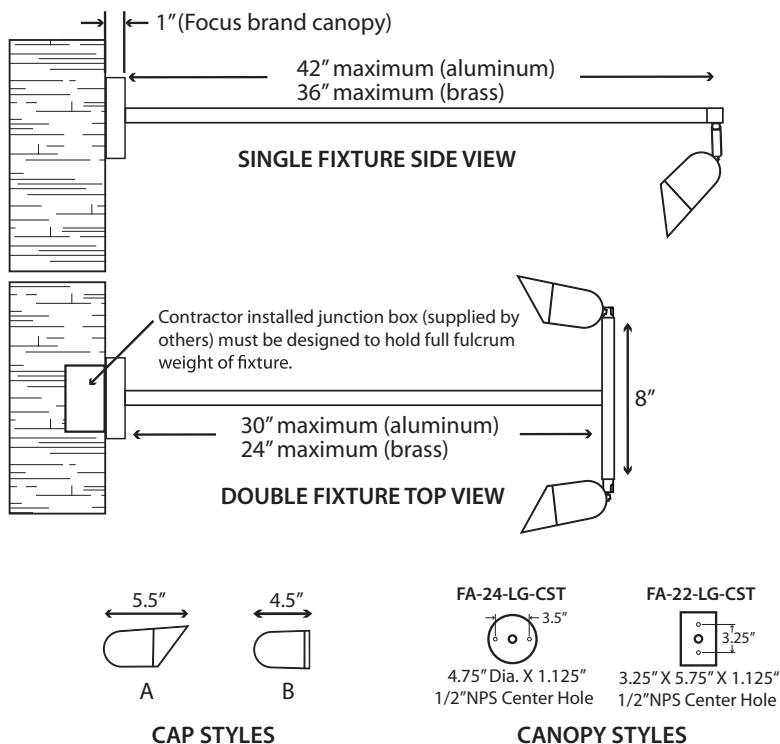

SPECIFICATIONS

Aluminum: Die cast bullet and canopy; adjustable die cast 360° swivel; extruded aluminum extension pole
Brass: Die cast bullet and canopy; adjustable die cast 360° swivel; extruded brass extension pole

Max Wattage: 50w

Lamp Options: MR16, MR16 LED

Socket:

12v - High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

Wiring:

12v - Black 18/2 SPT-1W 8" from base of fixture

Power Supply:

12v - Remote 12v transformer or internal hard wire transformer (not included)

Finish: See color options in ordering information below

IP55



SLS-22- 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8 - 9 - 10 - 11

ORDERING INFORMATION

- MATERIAL**
A: ALUMINUM
B: BRASS
- FIXTURE TYPE**
1: SINGLE
2: DOUBLE
- LIGHT SOURCE**
NL: NO LAMP, BI PIN SOCKET
01: 20W FL(BAB) 36°
02: 20W FL(BAB) 36° ULTRA 10K HOUR
03: 20W FL(BAB) 36° TITAN 12K HOUR
04: 20W NFL(BBF) 24° TITAN 12K HOUR
05: 20W SP(ESX) 12°
06: 20W VWFL(BAB) 60°
07: 35W FL(FMW) 36°
08: 35W FL(FMW) 36° ULTRA 10K HOUR
09: 35W FL(FMW) 36° TITAN 18K HOUR
10: 35W NFL(FMW) 24°
11: 35W NFL(FMW) 24° ULTRA 10K HOUR
12: 35W NFL(FMW) 24° TITAN 18K HOUR
13: 35W SP(FMT) 12°
14: 35W VWFL(FMW) 60°
15: 35W WF(FMW) 60° TITAN 18K HOUR
16: 50W FL(EXN) 36°
17: 50W FL(EXN) 36° ULTRA 10K HOUR
18: 50W FL(EXN) 36° TITAN 18K HOUR
19: 50W NFL(EXZ) 24° ULTRA 10K HOUR
20: 50W NFL(EXZ) 24° TITAN 18K HOUR
21: 50W SP(EXT) 12°
22: 50W SP(EXT) 12° ULTRA 10K HOUR
23: 50W SP(EXT) 12° TITAN 18K HOUR
24: 50W VWFL(FNV) 60°
25: 50W VWFL(FNV) 60° TITAN 18K HOUR
26: 4W ARROW LED (BAB) 35°
27: 4W ARROW LED (ESX) 12°
28: 4W SAVER MR16 LED 40°
29: 4W SAVER MR16 LED 15°
30: 6W ARROW MR16 LED 40°
31: 3W ARROW SUPER SAVER MR16 15°
32: 3W ARROW SUPER SAVER MR16 36°
33: 3W ARROW SUPER SAVER MR16 80°
34: 5W ARROW SUPER SAVER MR16 15°
35: 5W ARROW SUPER SAVER MR16 36°
36: 5W ARROW SUPER SAVER MR16 80°
37: 7W ARROW SUPER SAVER MR16 15°
38: 7W ARROW SUPER SAVER MR16 36°
39: 7W ARROW SUPER SAVER MR16 80°
- CAP STYLE**
A: ANGLE CAP
B: FLAT CAP
- LENS TYPE**
1: CONVEX
2: FLAT
- LENS ENHANCEMENT**
0: NO LENS ENHANCEMENT
- GLARE SHIELDING**
0: NO SHIELDING
H: HEX CELL LOUVER
- EXTENSION POLE STYLE**
A: STRAIGHT
B: 30° BEND
C: 45° BEND
D: U BEND (PROVIDE SPEC)
E: GOOSE NECK (PROVIDE SPEC)
F: CUSTOM BEND (PROVIDE SPEC)
- CANOPY**
0: NO CANOPY (1/2" NPS REQUIRED)
1: FA-24-LGCST ALUM ROUND
2: FA-24-LGCST BRASS ROUND
- GLARE SHIELDING**
0: NO SHIELDING
H: HEX CELL LOUVER
- EXTENSION POLE LENGTH**
12: 12 INCHES
18: 18 INCHES
24: 24 INCHES
30: 30 INCHES
36: 36 INCHES
42: 42 INCHES (ALUMINUM ONLY)
CUSTOM: LIST # OF INCHES
- EXTENSION POLE STYLE**
A: STRAIGHT
B: 30° BEND
C: 45° BEND
D: U BEND (PROVIDE SPEC)
E: GOOSE NECK (PROVIDE SPEC)
F: CUSTOM BEND (PROVIDE SPEC)
- CANOPY**
0: NO CANOPY (1/2" NPS REQUIRED)
1: FA-24-LGCST ALUM ROUND
2: FA-24-LGCST BRASS ROUND
- FA-24-LG-CST**
4.75" Dia. X 1.125"
1/2"NPS Center Hole
- FA-22-LG-CST**
3.25" X 5.75" X 1.125"
1/2"NPS Center Hole
- 3: FA-22-CST ALUM RECTANGLE**
4: FA-22-CST BRASS RECTANGLE
- 11. COLOR**
BLT: BLACK TEXTURE (STANDARD)
ATV: ANTIQUE VERDE
BLK: BLACK GLOSS
BRT: BRONZE TEXTURE
CAM: CAMEL TONE
CPR: CHROME POWDER
HTX: HUNTER TEXTURE
RBV: RUBBED VERDE
RST: RUST
STU: STUCCO
WBR: WEATHERED BROWN
WIR: WEATHERED IRON
WHT: WHITE GLOSS
WTX: WHITE TEXTURE
BRS: UNFINISHED BRASS
BAR: BRASS ACID RUST
BAV: BRASS ACID VERDE
BAT: BRASS BLACK ACID
CUSTOM COLORS AVAILABLE