



DIRECTIONAL LIGHTS

DL-47-NL



TYPE

SPECIFICATIONS

CONSTRUCTION: Extruded aluminum, brass or housing; matching cast adjustable swivel with 240° rotation;

LENS: High impact clear tempered convex glass

O-RING: High temperature red silicone

LAMP SUPPLIED: None; Use only outdoor rated 120v PAR30 lamps (100w max)

LAMP OPTIONS: We recommend 12w, 960 Lumen, PAR30 Super Saver LED with 40,000 hour average rating.

SOCKET: High temperature ceramic medium base with 250°C silicone lead wires

WIRING: Standard 120 volt Black, White and Ground 9" lead wires

MOUNTING: None supplied. We recommend FA-26 mounting post

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available.
Brass Unfinished. Optional finishes available.

GO GREEN




ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
DL-47-NL-BLT	Aluminum Bullet	None	3.0 lbs.
DL-47-NL-BRS	Brass Bullet	None	5.0 lbs.

BEAM/GLARE CONTROL ACCESSORIES

FA-08-DL-42-21	Round 1/4" Hex Cell Louver
FA-35-DL-42-GREEN	Green Acrylic Insert Lens
FA-11-DL-42-BLUE	Blue Tempered Glass Insert Lens
FA-11-DL-42-GREEN	Light Green Tempered Glass Insert Lens
FA-11-DL-42-AMBER	Amber Tempered Glass Insert Lens
FA-11-DL-42-RED	Red Tempered Glass Insert Lens
FA-104-DL-42-SB	Wide Spread Sandblasted Glass Insert Lens Softener

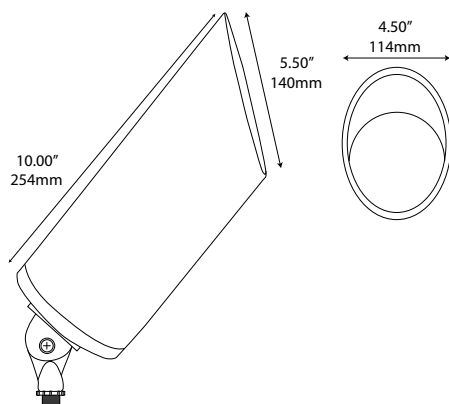

IP65

CE



JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.®
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT




DIRECTIONAL LIGHTS


DL-47-PAR

TYPE


MOUNTING ACCESSORIES

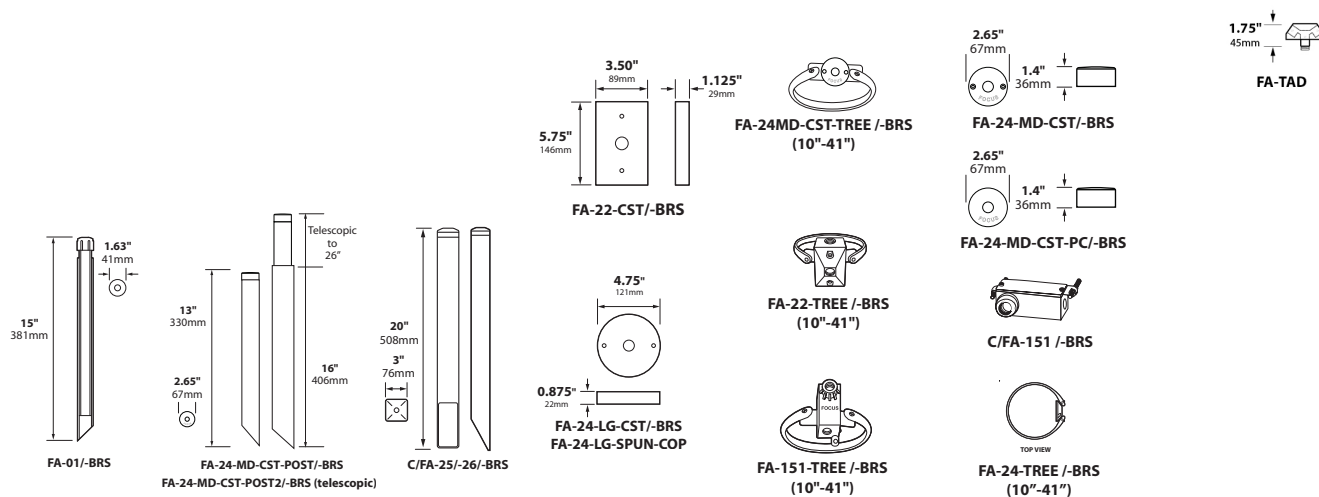

LIGHT DISTRIBUTIONS AND PHOTOMETRICS



FL-LED-P3015



FL-LED-P3040