



LED PATH LIGHTS PL-25-LEDP

TYPE

SPECIFICATIONS

CONSTRUCTION: Extruded aluminum "T" Path Light

LENS: High impact clear acrylic

LIGHT SOURCE: 2x 4w, 12v, integrated round LED flat panel, warm white 3000K (300 lumens)

optional cool white 5200K 320 lumen available (modify part number to LEDP52)

LIFETIME RATING: 50,000 Hours

12v INTERNAL DRIVER: 2x 4.9w 350mA output, 12v AC input. Voltage range of 9 to 18 volts with optimum operating range of 10 to 15 volts for consistent performance and brightness. Can be used with magnetic transformers or electronic LED drivers only.

SOCKET: None- LED is hard wired inside fixture

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)


For 25 foot 16/2 fixture lead wire add -25F to catalog number, for other lengths please consult factory.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v only

MOUNTING: FA-03-LG black 9" ABS stake, tapped 1/2" NPS (PL-22-DM)

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available
Brass - Unfinished brass. Optional finishes available

***NOTE:** Optional 120v to 277v drivers available. Must use FA-26 mounting post or junction boxes

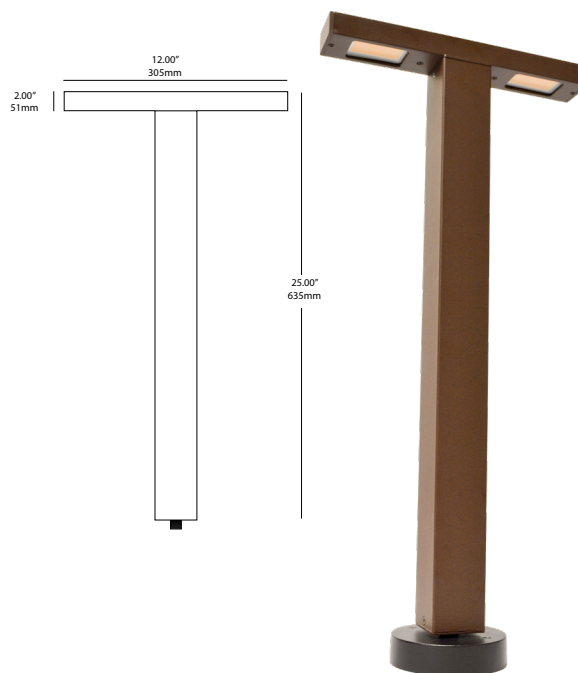

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
PL-25-LEDP-BLT	Aluminum T Path Light	2x 4w LED Panel	5.0 lbs.
PL-25-LEDP-BRS	Brass T Path Light	2x 4w LED Panel	10.0 lbs.


GO GREEN

IP54

CE

ETL
Intertek

MOUNTING ACCESSORIES ALUMINUM & BRASS

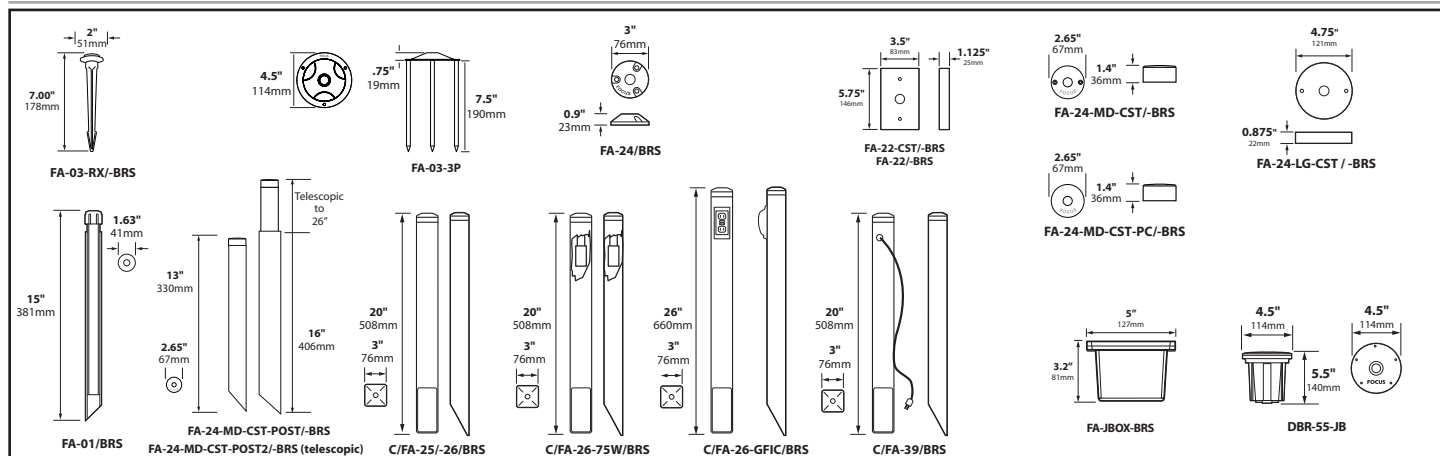

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT