

APPLICATIONS



PGL-02
12v
PUTTING
GREEN LIGHT



AL-04-AHX
12v
ADJUSTABLE
AREA LIGHTS

POWDER COAT FINISHES:
Black Texture Polyester Powder Coat is standard. To order other finishes, add color code to catalog #.
I.E. PGL-03-RST.

ACID TREATMENT for BRASS & COPPER only:
Add Acid Rust (-BAR) or Acid Verde (-BAV) to catalog #.


Amenity by Southwest Greens

STANDARD BLACK TEXTURE -BLT	WHITE TEXTURE -WTX	BRONZE TEXTURE -BRT	RUST -RST	ANTIQUÉ VERDE -ATV	RUBBED VERDE -RBV
HUNTER TEXTURE -HTX	WEATHERED BROWN -WBR	STUCCO -STU	WEATHERED IRON -WIR	CAMEL TONE -CAM	CHROME POWDER -CPR
					TERRA COTTA -TRC

MOUNTING OPTIONS:
For Solid Unfinished Brass, add -BRS to catalog #.
FA-01-BRS (Black PVC Telescopic Stake w/ brass cap available in 1' or 2')
FA-03/BRS (ABS Standard Stake add -BRS for Brass)
FA-03-LG (ABS Standard Stake)
FA-04 (Aluminum Stake)
FA-25-BRS (Commercial Mounting Pedestal)

optional

Quick Connector
Commercial Mounting Pedestal
FA-05

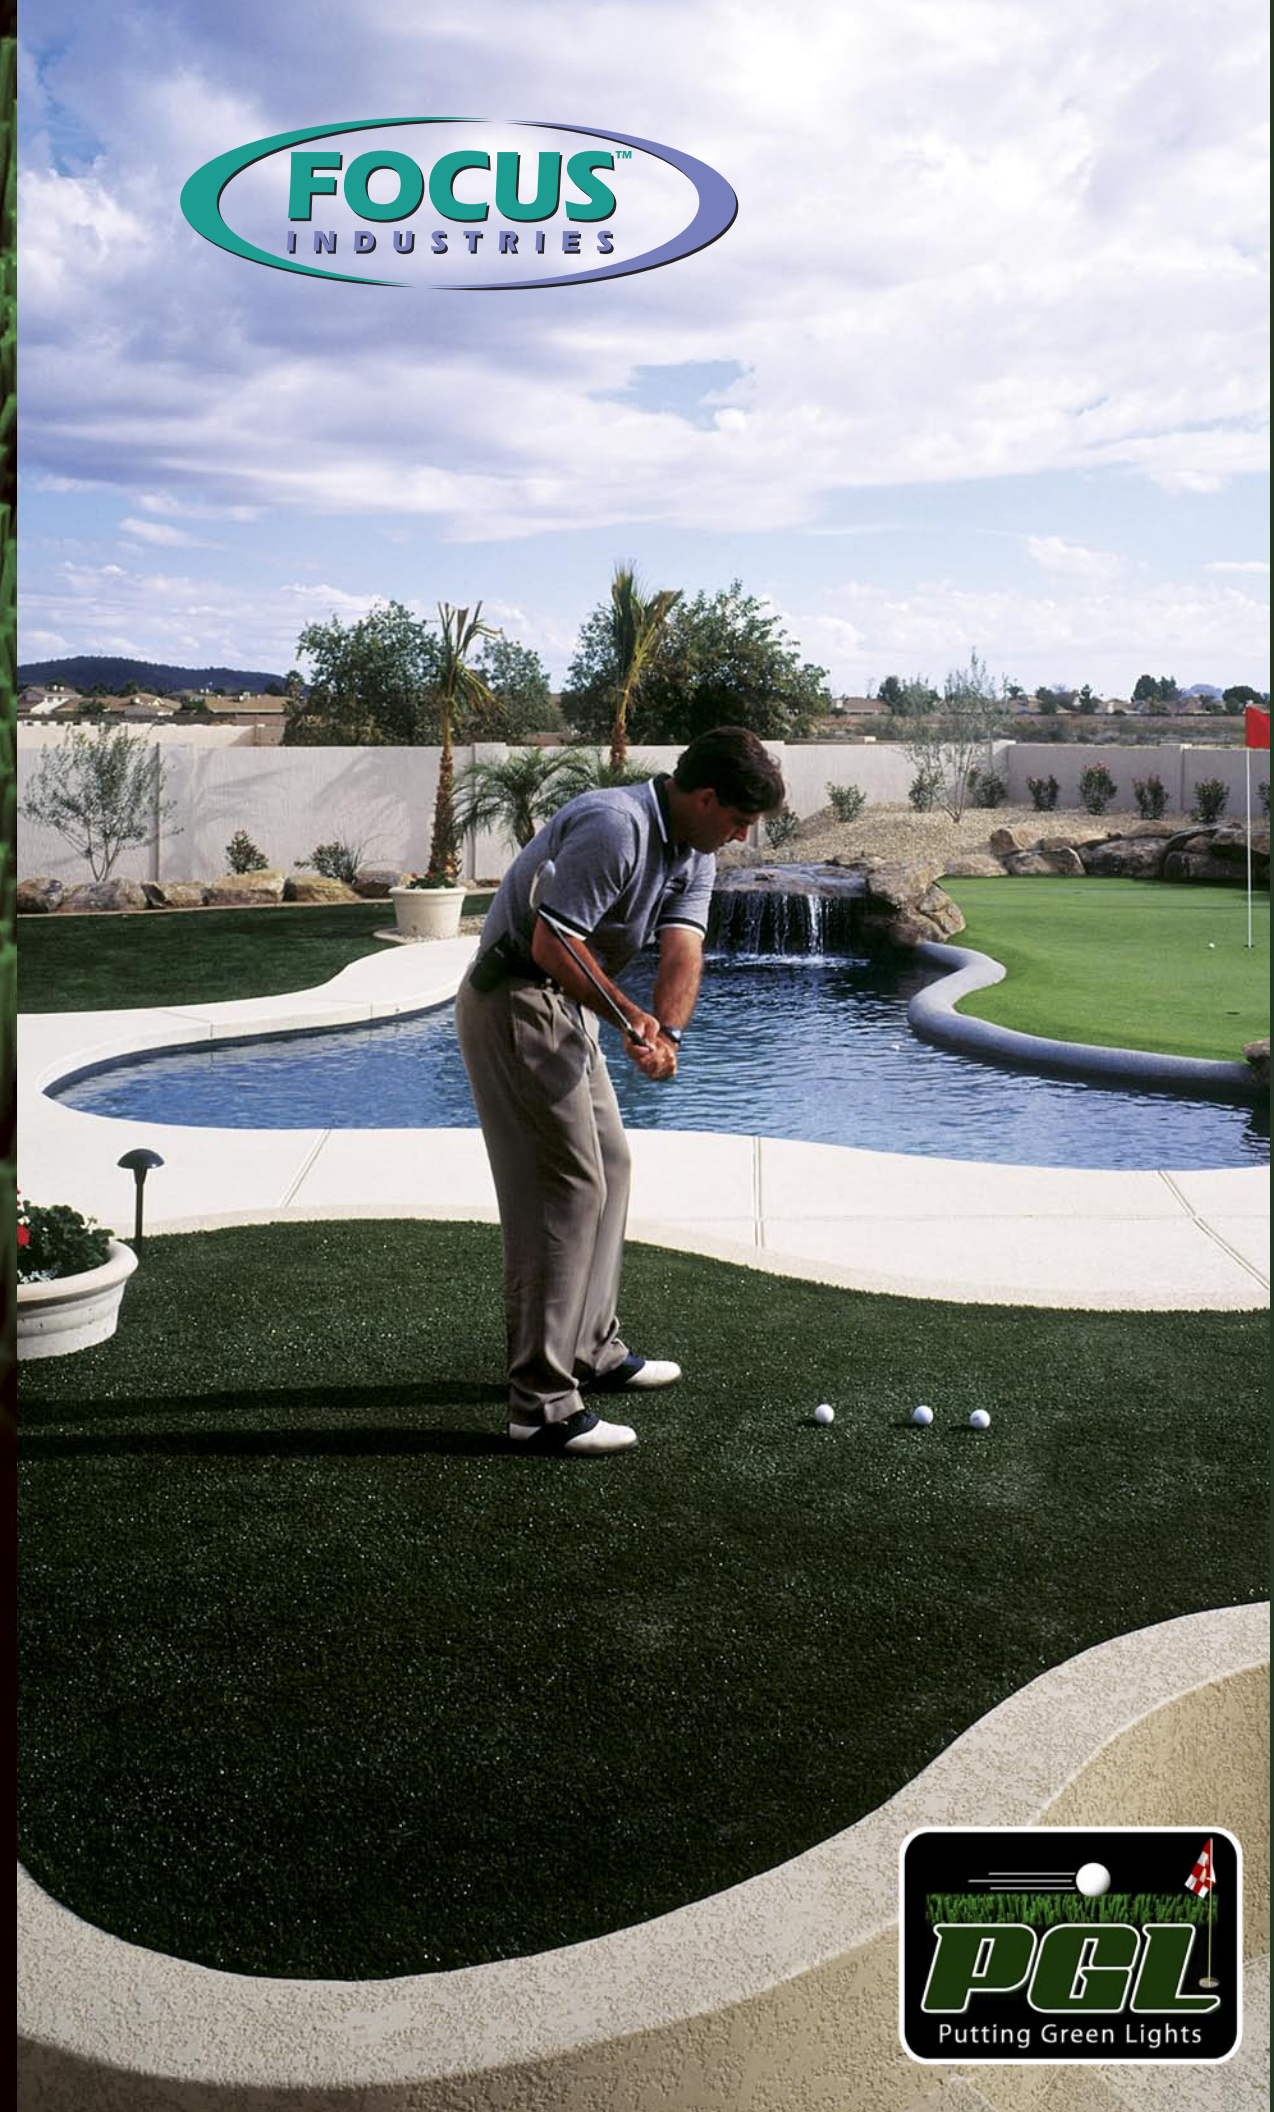

landscape • entertainment • architectural • hospitality • illumination

PGL SERIES

★ **FOCUS INDUSTRIES, INC.™**
World Headquarters • 25301 Commercentre Drive, Lake Forest, CA 92630 www.focusindustries.com
Phone: (949) 830-1350 • Fax: (949) 830-3390 • Toll Free: (888) 882-1350 • E-Mail: sales@focusindustries.com



All products made in the U.S.A.

REGIONAL DISTRIBUTION CENTERS

- 1 N. CALIFORNIA: 1 Light Sky Court, Suite #4, Sacramento, CA 95828 Ph. (916) 386-2233 • Toll Free (800) 972-0911 • Fax (916) 386-2232 • rex@repcor1.com
- 2 ARIZONA: 5001 S. 36th Street, Phoenix, AZ 85040 Ph. (602) 258-1557 • Fax (602) 258-1558 • travis@repnetcorp.com
- 3 NORTH CAROLINA: 705 S. Railroad Street, Salisbury NC 28144 Ph. (704) 642-0280 • Fax (704) 642-0804 • pml@pricemarketing.com
- 4 PENNSYLVANIA: 11500 Roosevelt Blvd., Unit G-1, Philadelphia, PA 19116 Ph. (215) 677-6870 • Toll Free (800) 468-0801 • Fax (215) 677-1261 • armand@associatedmarketing.net





12V PUTTING GREEN LIGHTS

THE ULTIMATE 120V PUTTING GREEN LIGHT

PGL-01



(5,000 Hours)

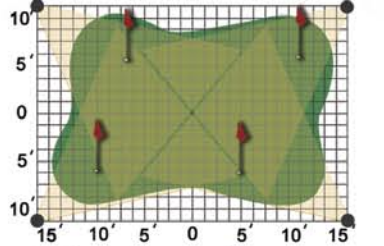
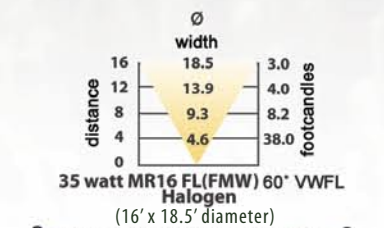


PGL-01 LIGHT DISTRIBUTION

PGL-02



(10,000 Hours)


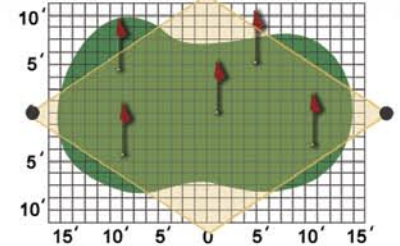
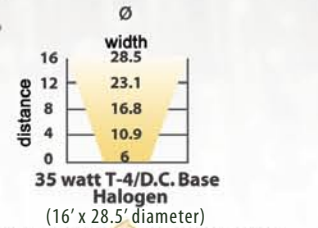


PGL-02 LIGHT DISTRIBUTION

PGL-03



(5,000 Hours)

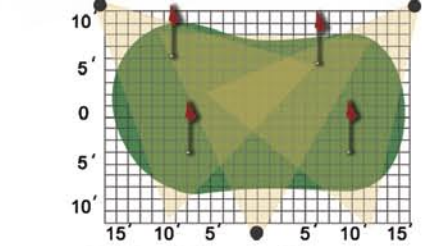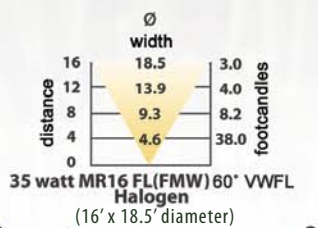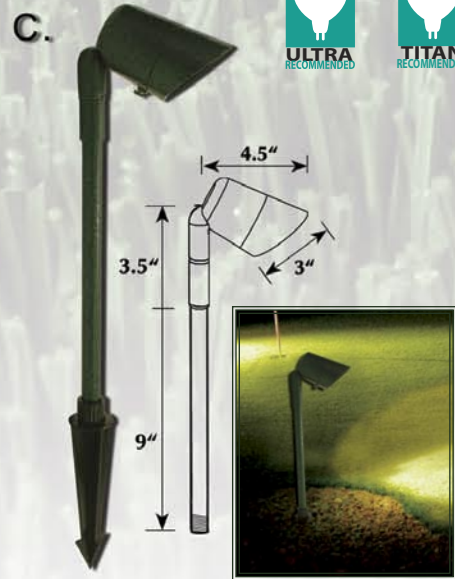


PGL-03 LIGHT DISTRIBUTION

D.


PGL-04



Features a cup holder, ball holder and two putter holders

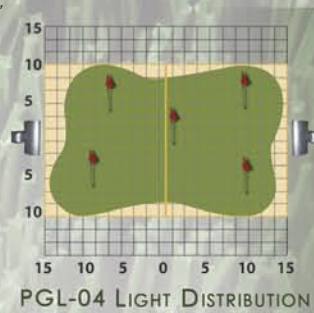

PGL-04 LIGHT DISTRIBUTION

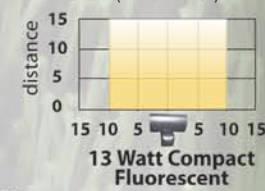

13 Watt Compact Fluorescent

D.

- Housing:** Extruded Black ABS w/Aluminum Fixture Head
- Socket:** GX23 Bi Pin
- Lamp:** 13w Compact Fluorescent 41k Cool White
- Lamp Life:** 10,000+ Hours Average Rating
- Lens:** High Impact Clear Acrylic
- Reflector:** Highly Polished Specular Aluminum
- Ballast:** Type 1 Outdoor Magnetic Clamped Core for All 120 Volt Compact Fluorescent Lights
- Mounting:** None
- Connection:** Must be installed by a Licensed Electrician per Local Codes
- Wiring:** Standard for 120V

NEW!

PGL-05 CUP LIGHT






- Housing:** Die Cast Brass Cuplight with Stamped Brass Bracket
- Lens:** Clear Convex w/ optional color (Green, Blue, Red, Yellow)
- Socket:** GU5.3 High temperature ceramic bi-pin
- Lamp:** 20w MR16 (ESX)
- Connection:** FA-05 Quick Connector (Not Supplied)
- Wiring:** Black 25 Foot Lead Wire 16/2



PGL-05 Cup Lights shown with optional FA-FLAG acrylic flags

12V ADJUSTABLE AREA LIGHTS

Other Alternatives for Putting Greens:

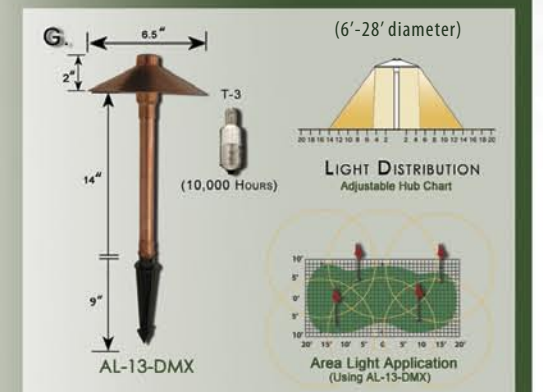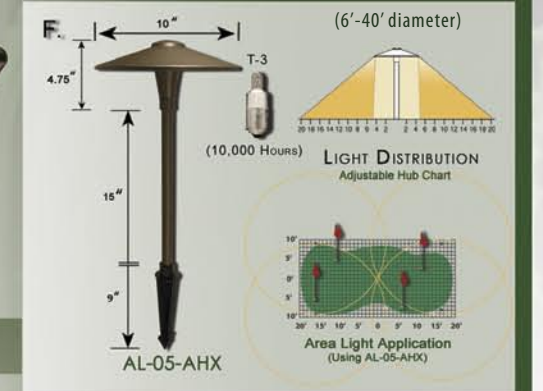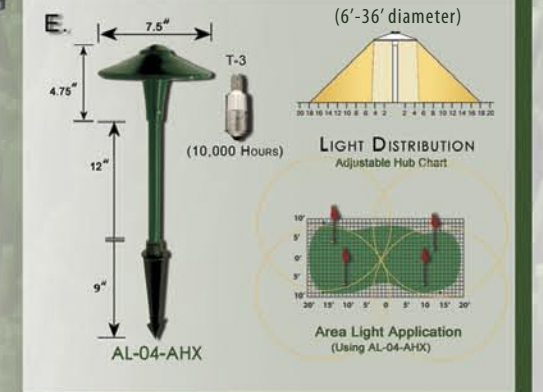

SPECIFICATIONS			
A. Housing: Cast Aluminum or Cast Brass	B. Housing: Extruded Aluminum or Cast Brass	C. Housing: Cast Aluminum or Cast Brass	E. Housing: Cast Aluminum or Cast Brass 7.5" Hat
Stem: 9" Stem 7/8" O.D. Extruded Aluminum Threaded 1/2" NPS	Stem: 25" Stem 7/8" O.D. Extruded Aluminum Threaded 1/2" NPS	Stem: 9" Stem 7/8" O.D. Extruded Aluminum Threaded 1/2" NPS	Stem: 12" Stem 7/8" O.D. Tube
Socket: G5.35 Ceramic Bi-Pin 250°C Teflon Wire	Socket: BA-15 D.C. Brass/Nickel Plated	Socket: G5.35 Ceramic Bi-Pin 250°C Teflon Wire	Socket: S.C. Bayonet Base (BA-15s)
Lamp: 35w MR16 60° (VWFL) (50w max)	Lamp: 35w T4/D.C. Halogen (50w max)	Lamp: 35w MR16 60° (VWFL) (50w max)	Lamp: 20w T3 S.C. Xenon (35w max)
Lens: Solite Tempered Glass Lens	Lens: Clear Tempered Glass Lens	Lens: Solite Tempered Glass Lens	Lamp: FA-03 Black PVC Stake Supplied or FA-25 Commercial Mounting Pedestal Optional
Mounting: FA-03 Black PVC Stake Supplied or FA-25 Commercial Mounting Pedestal Optional	Mounting: FA-03 Black PVC Stake Supplied or FA-25 Commercial Mounting Pedestal Optional	Mounting: FA-03 Black PVC Stake Supplied or FA-25 Commercial Mounting Pedestal Optional	Mounting: FA-03 Black PVC Stake Supplied or FA-25 Commercial Mounting Pedestal Optional
Connection: FA-05 Quick Connector (Not Supplied)	Connection: FA-05 Quick Connector (Not Supplied)	Connection: FA-05 Quick Connector (Not Supplied)	Connection: FA-05 Quick Connector (Not Supplied)
Wiring: Black 3' 18-2 Zip Cord	Wiring: Black 3' 18-2 Zip Cord	Wiring: Black 3' 18-2 Zip Cord	Wiring: Black 3' 18-2 Zip Cord
25 Foot Lead Wire Available 16/2 add (-25F)	25 Foot Lead Wire Available 16/2 add (-25F)	25 Foot Lead Wire Available 16/2 add (-25F)	25 Foot Lead Wire Available 16/2 add (-25F)

SPECIFICATIONS			
F. Housing: Cast Aluminum or Cast Brass 10" Hat	G. Housing: Solid Copper, Unfinished 6.5" Hat	F. Housing: Cast Aluminum or Cast Brass 10" Hat	G. Housing: Solid Copper, Unfinished 6.5" Hat
Stem: 15" Stem 7/8" O.D. Tube	Stem: 14" Stem 1 1/8" O.D. Tube	Stem: 15" Stem 7/8" O.D. Tube	Stem: 14" Stem 1 1/8" O.D. Tube
Socket: S.C. Bayonet Base (BA-15s)	Socket: S.C. Bayonet Base (BA-15s)	Socket: S.C. Bayonet Base (BA-15s)	Socket: S.C. Bayonet Base (BA-15s)
Lamp: 20w T3 S.C. Xenon (35w max)	Lamp: 20w T3 S.C. Xenon (35w max)	Lamp: 20w T3 S.C. Xenon (35w max)	Lamp: 20w T3 S.C. Xenon (35w max)
Mounting: FA-03 Black PVC Stake Supplied or FA-25 Commercial Mounting Pedestal Optional	Mounting: FA-03 Brass Stake Supplied or FA-25 Commercial Mounting Pedestal Optional	Mounting: FA-03 Black PVC Stake Supplied or FA-25 Commercial Mounting Pedestal Optional	Mounting: FA-03 Brass Stake Supplied or FA-25 Commercial Mounting Pedestal Optional
Connection: FA-05 Quick Connector (Not Supplied)	Connection: FA-05 Quick Connector (Not Supplied)	Connection: FA-05 Quick Connector (Not Supplied)	Connection: FA-05 Quick Connector (Not Supplied)
Wiring: Black 3' 18-2 Zip Cord	Wiring: Black 3' 18-2 Zip Cord	Wiring: Black 3' 18-2 Zip Cord	Wiring: Black 3' 18-2 Zip Cord
25 Foot Lead Wire Available 16/2 add (-25F)	25 Foot Lead Wire Available 16/2 add (-25F)	25 Foot Lead Wire Available 16/2 add (-25F)	25 Foot Lead Wire Available 16/2 add (-25F)