



landscape • entertainment • architectural • hospitality • illumination

RXD-05 DIRECTIONAL LIGHTS



25301 COMMERCENTRE DRIVE • LAKE FOREST, CA 92630 • 949.830.1350 • 888.882.1350 • FAX 949.830.3390



DIRECTIONAL LIGHTS RXD-05-NL SERIES

TYPE

SPECIFICATIONS

CONSTRUCTION:

ALUMINUM: Aluminum bullet; matching cast aluminum adjustable swivel with 240° rotation
BRASS: Brass bullet; matching cast brass adjustable swivel with 240° rotation
COPPER: Copper bullet; cast brass adjustable swivel with 240° rotation

LENS: High impact clear tempered convex glass

O-RING: High temperature red silicone

LAMP SUPPLIED: None (50w max); Use only outdoor rated PAR20 lamps

SOCKET: High temperature ceramic medium base with 250° C silicone lead wires

WIRING: Standard 120 volt Black, White and Ground 9" lead wires

MOUNTING: None supplied. See Mounting Accessories below for options

FINISH: Aluminum - Black texture polyester powder coat, optional finishes available
Brass and Copper - Unfinished, optional finishes available

ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
RXD-05-NL-BLT	Aluminum PAR20 Bullet	None	2.0 lbs.
RXD-05-NL-BRS	Brass PAR20 Bullet	None	3.0 lbs.
RXD-05-NL-COP	Copper PAR20 Bullet	None	3.0 lbs.
RXD-05-NLTS-BLT	Aluminum PAR20 Tube Shield Bullet	None	2.0 lbs.
RXD-05-NLTS-BRS	Brass PAR20 Tube Shield Bullet	None	3.0 lbs.
RXD-05-NLTS-COP	Copper PAR20 Tube Shield Bullet	None	3.0 lbs.



RXD-05-NL-BRT
mounted on
FA-26-BRT



RXD-05-NLTS-WTX
mounted on
FA-24-LGCST-WTX

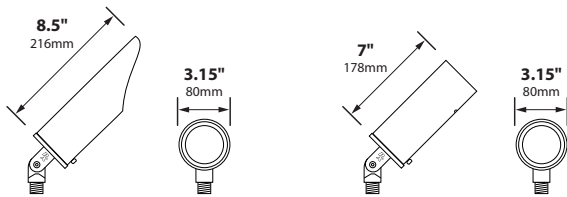

RXD-05-NL

RXD-05-NLTS



MOUNTING ACCESSORIES

STEM EXTENSIONS

FA-25/-26/BR5: 20" 508mm, 3" 76mm

C/FA-26-75W/BR5: 20" 508mm, 3" 76mm

C/FA-26-GFIC/BR5: 26" 660mm, 3" 76mm

FA-22-CST/-BR5: 3.25" 83mm, 1.00" 25mm, 5.75" 146mm

FA-24-MD-CST: 2.65" 67mm, 1.4" 36mm

FA-24MD-CST-TREE (10"-41")

FA-111-TREE (10"-41")

FA-22-TREE (10"-41")

FA-111: 2.2" 55.88mm

FA-30 FA-31 FA-32 FA-33 FA-34: 10" 254mm, 13" 330mm, 15" 381mm, 21" 533mm, 26" 660mm

-BR5 = Brass Models (Arrow: couplers)

BEAM/GLARE CONTROL ACCESSORIES

FA-08-06	Round 1/4" Hex Cell Louver
FA-10-20-BLUE	Blue Tempered Glass Lens
FA-10-20-GREEN	Green Tempered Glass Lens
FA-98-20	Linear Spread Tempered Glass Lens
FA-104-20	Wide Spread Tempered Glass Lens Softener

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC	-BAR/CAR	-BAV/CAV	-BAT




DIRECTIONAL LIGHTS RXD-05-NL SERIES




TYPE


LIGHT DISTRIBUTIONS AND PHOTOMETRICS




35w PAR20 Flood 30°

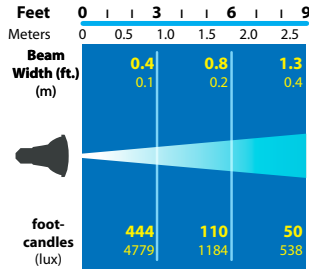

50w PAR20 Spot 10°

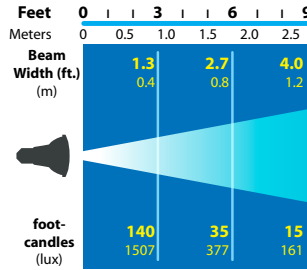

50w PAR20 Narrow Flood 30°



50w PAR20 Flood 40°

