





FLAT PANEL LED RETROFIT RFL-P-1-04-Q-30-0350-MVI-A

TYPE

GO GREEN



- Voltage: 120v - 277v
- Total Watts: 6
- Lumens: 405
- Lumens Per Watt: 68
- CCT: 3000K
- CRI: 80
- LM79 tested
- LED Panel UL8750 Recognized Component
- One 4w 350mA LED Panel rated 50,000 hours (L7)
- Cool Beam, No UV or IR
- Non-Dimmable
- 5 Year Limited Warranty
- Remote Phosphor LED technology
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- External multi-volt driver included (120v - 277v)
- 3" x 5" mounting plate - custom mounting holes available

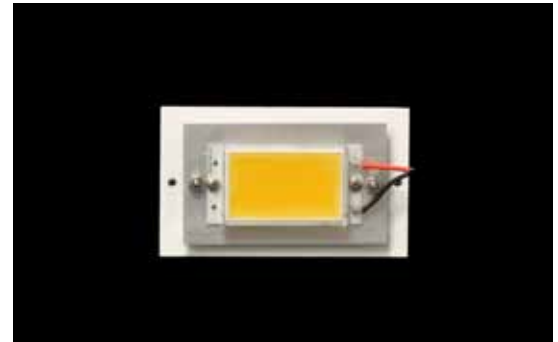

Driver Specifications

Output Power:	6w
Input Voltage:	120v-277v
Output Voltage:	2V-20V AC / 350mA
Dimmable:	No
Potted:	Yes
Case:	Plastic
Dimensions:	1.8" (w) x 2.6" (h) x 1.0" (d)
Input wire size:	18 AWG, 6" length
Output wire size:	18 AWG, 6" length
Input wires color:	Black (line), White (neutral)
Output wires color:	Red (+), Black (-)
Standards:	UL Recognized Component

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	SHIP WEIGHT
RFL-P-1-04-Q-30-0350-MVI-A	6W RETROFIT LED PANEL, 1 X 4W QUAD 3000K, 350mA, 120-277V, 3" X 5" PLATE	1 lbs





lighting facts[®]

A Program of the U.S. DOE


Light Output (Lumens)	405
Watts	6
Lumens per Watt (Efficacy)	67.5

Color Accuracy	80
Color Rendering Index (CRI)	

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)



All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: E2KD-1EPK1K (11/19/2014)

Model Number: RFL-P-1-04-Q-30-0350-MVI-A

Type: Retrofit Kit - Other





FLAT PANEL LED RETROFIT RFL-P-1-04-R-30-0350-MVI-A

TYPE

GO GREEN



- Voltage: 120v - 277v
- Total Watts: 6
- Lumens: 440
- Lumens Per Watt: 73
- CCT: 3000K
- CRI: 79
- LM79 tested
- LED Panel UL8750 Recognized Component
- One 4w 350mA LED Panel rated 50,000 hours (L7)
- Cool Beam, No UV or IR
- Non-Dimmable
- 5 Year Limited Warranty
- Remote Phosphor LED technology
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- External multi-volt driver included (120v - 277v)
- 3" x 5" mounting plate - custom mounting holes available

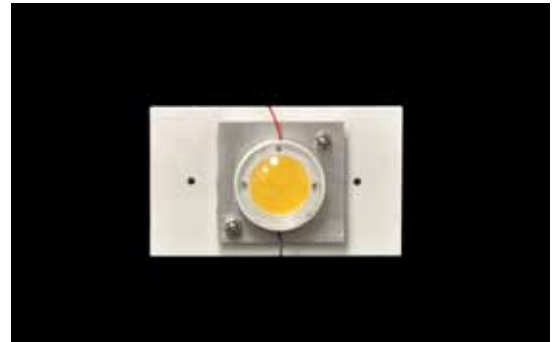

Driver Specifications

Output Power:	6w
Input Voltage:	120v-277v
Output Voltage:	2V-20V AC / 350mA
Dimmable:	No
Potted:	Yes
Case:	Plastic
Dimensions:	1.8" (w) x 2.6" (h) x 1.0" (d)
Input wire size:	18 AWG, 6" length
Output wire size:	18 AWG, 6" length
Input wires color:	Black (line), White (neutral)
Output wires color:	Red (+), Black (-)
Standards:	UL Recognized Component

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	SHIP WEIGHT
RFL-P-1-04-R-30-0350-MVI-A	6W RETROFIT LED PANEL, 1 X 4W ROUND 3000K, 350mA, 120-277V, 3" X 5" PLATE	1 lbs





lighting facts[®]

A Program of the U.S. DOE


Light Output (Lumens)	440
Watts	6
Lumens per Watt (Efficacy)	73.33

Color Accuracy	79
Color Rendering Index (CRI)	

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)



All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: E2KD-V1TBJE (11/19/2014)

Model Number: RFL-P-1-04-R-30-0350-MVI-A

Type: Retrofit Kit - Other




FLAT PANEL LED RETROFIT RFL-P-1-05-Q-30-0350-MVI-B

TYPE

GO GREEN



- Voltage: 120v - 277v
- Total Watts: 6
- Lumens: 410
- Lumens Per Watt: 69
- CCT: 3000K
- CRI: 80
- LM79 tested
- LED Panel UL8750 Recognized Component
- One 5w 350mA LED Panel rated 50,000 hours (L7)
- Cool Beam, No UV or IR
- Non-Dimmable
- 5 Year Limited Warranty
- Remote Phosphor LED technology
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- External multi-volt driver included (120v - 277v)
- 3" x 9" mounting plate - custom mounting holes available

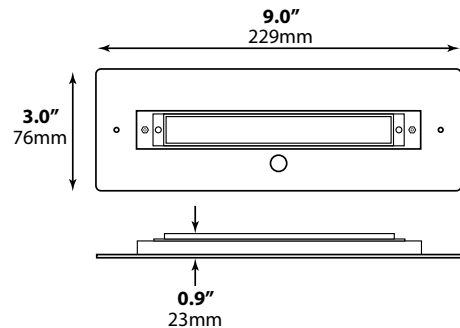

Driver Specifications

Output Power:	6w
Input Voltage:	120v-277v
Output Voltage:	2V-20V AC / 350mA
Dimmable:	No
Potted:	Yes
Case:	Plastic
Dimensions:	1.8" (w) x 2.6" (h) x 1.0" (d)
Input wire size:	18 AWG, 6" length
Output wire size:	18 AWG, 6" length
Input wires color:	Black (line), White (neutral)
Output wires color:	Red (+), Black (-)
Standards:	UL Recognized Component

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	SHIP WEIGHT
RFL-P-1-05-Q-30-0350-MVI-B	6W RETROFIT LED PANEL, 1 X 5W QUAD 3000K, 350mA, 120-277V, 3" X 9" PLATE	1 lbs





lighting facts[®]

A Program of the U.S. DOE


Light Output (Lumens)	410
Watts	6
Lumens per Watt (Efficacy)	68.33

Color Accuracy	80
Color Rendering Index (CRI)	

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)



All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: E2KD-OEDIRZ (11/19/2014)

Model Number: RFL-P-1-05-Q-30-0350-MVI-B

Type: Retrofit Kit - Other




FLAT PANEL LED RETROFIT RFL-P-1-08-Q-30-0700-MVI-B

TYPE

GOGREEN



- Voltage: 120v - 277v
- Total Watts: 10
- Lumens: 780
- Lumens Per Watt: 78
- CCT: 3000K
- CRI: 80
- LM79 tested
- LED Panel UL8750 Recognized Component
- One 8w 700mA LED Panel rated 50,000 hours (L7)
- Cool Beam, No UV or IR
- Non-Dimmable
- 5 Year Limited Warranty
- Remote Phosphor LED technology
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- External multi-volt driver included (120v - 277v)
- 3" x 9" mounting plate - custom mounting holes available

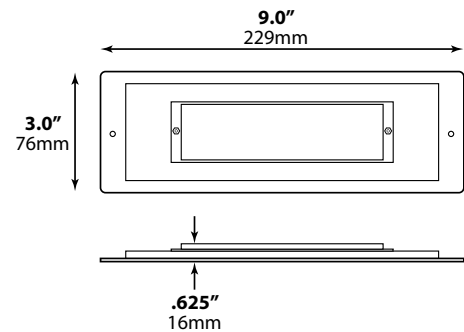

Driver Specifications

Output Power:	20w (no minimum load)
Input Voltage:	90v-277v
Output Voltage:	12v AC / 0-1.6A
Dimmable:	No
Potted:	No
Case:	Fully isolated plastic
Dimensions:	6" (w) x 1.5" (h) x 1.1" (d)
Input wire size:	18 AWG, 6" length
Output wire size:	18 AWG, 6" length
Input wires color:	Brown (line), Blue (neutral)
Output wires color:	Red (+), Black (-)
Standards:	UL Recognized Component

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	SHIP WEIGHT
RFL-P-1-08-Q-30-0700-MVI-B	10W RETROFIT LED PANEL, 1 X 8W QUAD 3000K, 700mA, 120-277V, 3" X 9" PLATE	2 lbs





lighting facts[®]

A Program of the U.S. DOE


Light Output (Lumens)	780
Watts	10
Lumens per Watt (Efficacy)	78

Color Accuracy	80
Color Rendering Index (CRI)	

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)



All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: E2KD-B15IPX (11/19/2014)

Model Number: RFL-P-1-08-Q-30-0700-MVI-B

Type: Retrofit Kit - Other




FLAT PANEL LED RETROFIT RFL-P-1-08-R-30-0700-MVI-B

TYPE

GOGREEN



- Voltage: 120v - 277v
- Total Watts: 10
- Lumens: 710
- Lumens Per Watt: 71
- CCT: 3000K
- CRI: 80
- LM79 tested
- LED Panel UL8750 Recognized Component
- One 8w 700mA LED Panel rated 50,000 hours (L7)
- Cool Beam, No UV or IR
- Non-Dimmable
- 5 Year Limited Warranty
- Remote Phosphor LED technology
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- External multi-volt driver included (120v - 277v)
- 3" x 9" mounting plate - custom mounting holes available

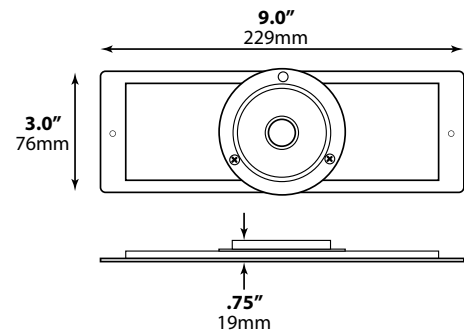

Driver Specifications

Output Power:	20w (no minimum load)
Input Voltage:	90v-277v
Output Voltage:	12v AC / 0-1.6A
Dimmable:	No
Potted:	No
Case:	Fully isolated plastic
Dimensions:	6" (w) x 1.5" (h) x 1.1" (d)
Input wire size:	18 AWG, 6" length
Output wire size:	18 AWG, 6" length
Input wires color:	Brown (line), Blue (neutral)
Output wires color:	Red (+), Black (-)
Standards:	UL Recognized Component



ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	SHIP WEIGHT
RFL-P-1-08-R-30-0700-MVI-B	10W RETROFIT LED PANEL, 1 X 8W ROUND 3000K, 700mA, 120-277V, 3" X 9" PLATE	2 lbs





lighting facts[®]

A Program of the U.S. DOE


Light Output (Lumens)	710
Watts	10
Lumens per Watt (Efficacy)	71

Color Accuracy	80
Color Rendering Index (CRI)	

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)



All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: E2KD-5CZ88A (11/19/2014)

Model Number: RFL-P-1-08-R-30-0700-MVI-B

Type: Retrofit Kit - Other




FLAT PANEL LED RETROFIT RFL-P-1-12-Q-30-1000-MVI-E

TYPE

GO GREEN



- Voltage: 120v - 277v
- Total Watts: 12
- Lumens: 955
- Lumens Per Watt: 80
- CCT: 3000K
- CRI: 80
- LM79 tested
- LED Panel UL8750 Recognized Component
- One 12w 1000mA LED Panel rated 50,000 hours (L7)
- Cool Beam, No UV or IR
- Non-Dimmable
- 5 Year Limited Warranty
- Remote Phosphor LED technology
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- External multi-volt driver included (120v - 277v)
- 3" x 14.5" mounting plate - custom mounting holes available

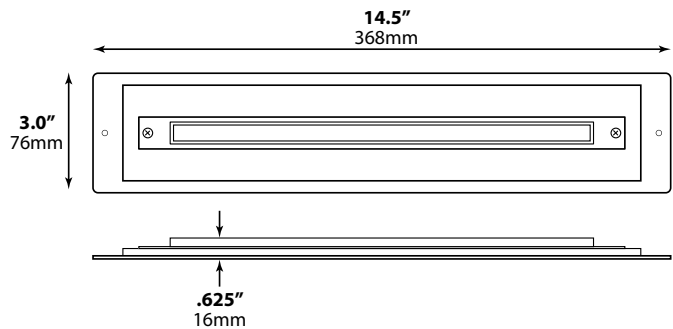

Driver Specifications

Output Power:	20w (no minimum load)
Input Voltage:	90v-277v
Output Voltage:	12v AC / 0-1.6A
Dimmable:	No
Potted:	No
Case:	Fully isolated plastic
Dimensions:	6" (w) x 1.5" (h) x 1.1" (d)
Input wire size:	18 AWG, 6" length
Output wire size:	18 AWG, 6" length
Input wires color:	Brown (line), Blue (neutral)
Output wires color:	Red (+), Black (-)
Standards:	UL Recognized Component



ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	SHIP WEIGHT
RFL-P-1-12-Q-30-1000-MVI-E	12W RETROFIT LED PANEL, 1 X 12W QUAD 3000K, 1000mA, 120-277V, 3" X 14.5" PLATE	2 lbs





lighting facts[®]

A Program of the U.S. DOE


Light Output (Lumens)	955
Watts	12
Lumens per Watt (Efficacy)	79.58

Color Accuracy	80
Color Rendering Index (CRI)	

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)



All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: E2KD-IDMEW7 (11/19/2014)

Model Number: RFL-P-1-12-Q-30-1000-MVI-E

Type: Retrofit Kit - Other



FLAT PANEL LED RETROFIT RFL-P-2-04-Q-30-0350-MVI-C


TYPE

GO GREEN

- Voltage: 120v - 277v
- Total Watts: 11
- Lumens: 830
- Lumens Per Watt: 76
- CCT: 3000K
- CRI: 80
- LM79 tested
- LED Panel UL8750 Recognized Component
- Two 4w 350mA LED Panel rated 50,000 hours (L7)
- Cool Beam, No UV or IR
- Non-Dimmable
- 5 Year Limited Warranty
- Remote Phosphor LED technology
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- 2 x external multi-volt drivers included (120v - 277v)
- 5" x 9" mounting plate - custom mounting holes available

Driver Specifications

Output Power:	6w
Input Voltage:	120v-277v
Output Voltage:	2V-20V AC / 350mA
Dimmable:	No
Potted:	Yes
Case:	Plastic
Dimensions:	1.8" (w) x 2.6" (h) x 1.0" (d)
Input wire size:	18 AWG, 6" length
Output wire size:	18 AWG, 6" length
Input wires color:	Black (line), White (neutral)
Output wires color:	Red (+), Black (-)
Standards:	UL Recognized Component

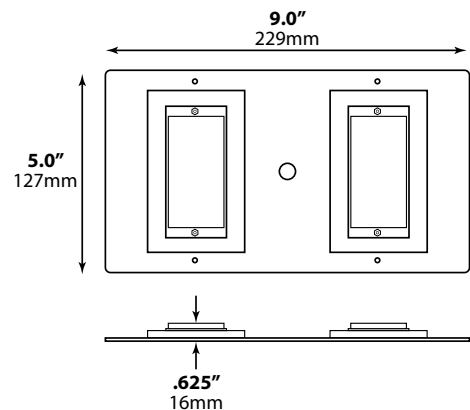

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	SHIP WEIGHT
RFL-P-2-04-Q-30-0350-MVI-C	11W RETROFIT LED PANEL, 2 X 4W QUAD 3000K, 350mA, 120-277V, 5" X 9" PLATE	2 lbs





lighting facts[®]

A Program of the U.S. DOE


Light Output (Lumens)	830
Watts	11
Lumens per Watt (Efficacy)	75.45

Color Accuracy	80
Color Rendering Index (CRI)	

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)



All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: E2KD-NZFG6O (11/19/2014)

Model Number: RFL-P-2-04-Q-30-0350-MVI-C

Type: Retrofit Kit - Other



FLAT PANEL LED RETROFIT RFL-P-2-05-Q-30-0350-MVI-C

TYPE




GO GREEN



- Voltage: 120v - 277v
- Total Watts: 11
- Lumens: 890
- Lumens Per Watt: 81
- CCT: 3000K
- CRI: 80
- LM79 tested
- LED Panel UL8750 Recognized Component
- Two 5w 350mA LED Panel rated 50,000 hours (L7)
- Cool Beam, No UV or IR
- Non-Dimmable
- 5 Year Limited Warranty
- Remote Phosphor LED technology
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- 2 x external multi-volt drivers included (120v - 277v)
- 5" x 9" mounting plate - custom mounting holes available

Driver Specifications

Output Power:	6w
Input Voltage:	120v-277v
Output Voltage:	2V-20V AC / 350mA
Dimmable:	No
Potted:	Yes
Case:	Plastic
Dimensions:	1.8" (w) x 2.6" (h) x 1.0" (d)
Input wire size:	18 AWG, 6" length
Output wire size:	18 AWG, 6" length
Input wires color:	Black (line), White (neutral)
Output wires color:	Red (+), Black (-)
Standards:	UL Recognized Component

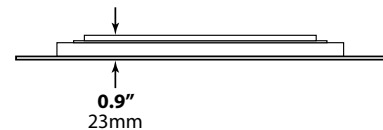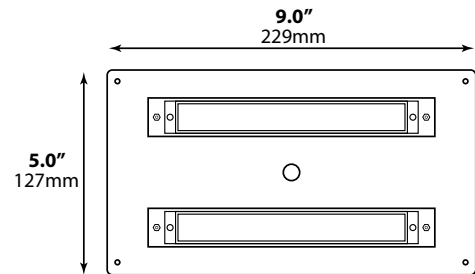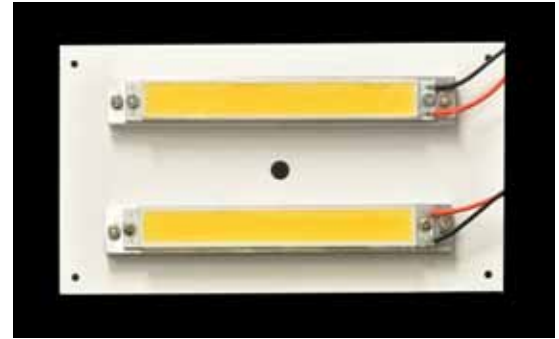

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	SHIP WEIGHT
RFL-P-2-05-Q-30-0350-MVI-C	11W RETROFIT LED PANEL, 2 X 5W QUAD 3000K, 350mA, 120-277V, 5" X 9" PLATE	2 lbs





lighting facts®


A Program of the U.S. DOE

Light Output (Lumens)	890
Watts	11
Lumens per Watt (Efficacy)	80.91

Color Accuracy	80
Color Rendering Index (CRI)	

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: E2KD-NRWD28 (11/19/2014)

Model Number: RFL-P-2-05-Q-30-0350-MVI-C

Type: Retrofit Kit - Other




FLAT PANEL LED RETROFIT RFL-P-2-12-Q-30-1000-MVI-F

TYPE

GO GREEN



- Voltage: 120v - 277v
- Total Watts: 30
- Lumens: 2209
- Lumens Per Watt: 73
- CCT: 3000K
- CRI: 80
- LM79 tested
- LED Panel UL8750 Recognized Component
- Two 12w 1000mA LED Panels rated 50,000 hours (L7)
- Cool Beam, No UV or IR
- Non-Dimmable
- 5 Year Limited Warranty
- Remote Phosphor LED technology
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- 2 x External multi-volt drivers included (120v - 277v)
- 8" x 14.5" mounting plate - custom mounting holes available

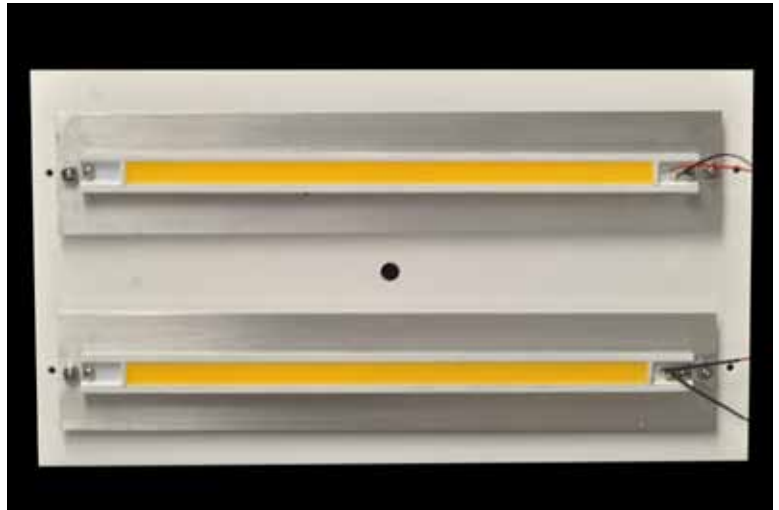


Driver Specifications

Output Power:	20w (no minimum load)
Input Voltage:	90v-277v
Output Voltage:	12v AC / 0-1.6A
Dimmable:	No
Potted:	No
Case:	Fully isolated plastic
Dimensions:	6" (w) x 1.5" (h) x 1.1" (d)
Input wire size:	18 AWG, 6" length
Output wire size:	18 AWG, 6" length
Input wires color:	Brown (line), Blue (neutral)
Output wires color:	Red (+), Black (-)
Standards:	UL Recognized Component



ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	SHIP WEIGHT
RFL-P-2-12-Q-30-1000-MVI-F	30W RETROFIT LED PANEL, 2 X 12W QUAD 3000K, 1000mA, 120-277V, 8" X 14.5" PLATE	3 lbs

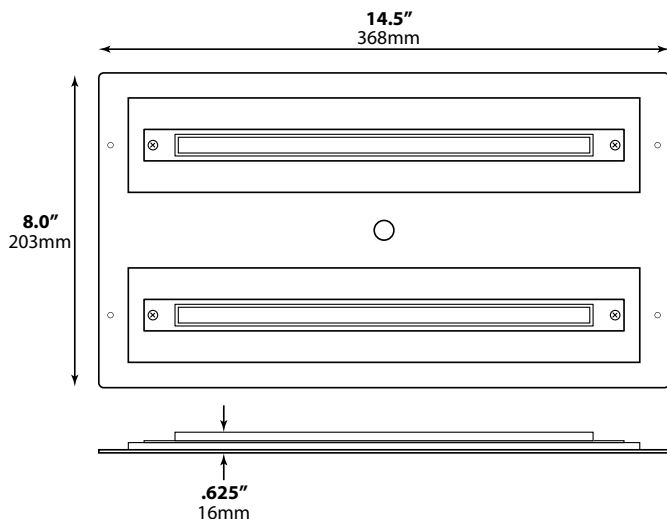



lighting facts®

A Program of the U.S. DOE


Light Output (Lumens)	2209
Watts	30
Lumens per Watt (Efficacy)	73.63

Color Accuracy	80
Color Rendering Index (CRI)	

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)



All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: E2KD-ZJROOG (11/19/2014)

Model Number: RFL-P-2-12-Q-30-1000-MVI-F

Type: Retrofit Kit - Other