







SLS-08 SERIES SIGN LIGHT

TYPE

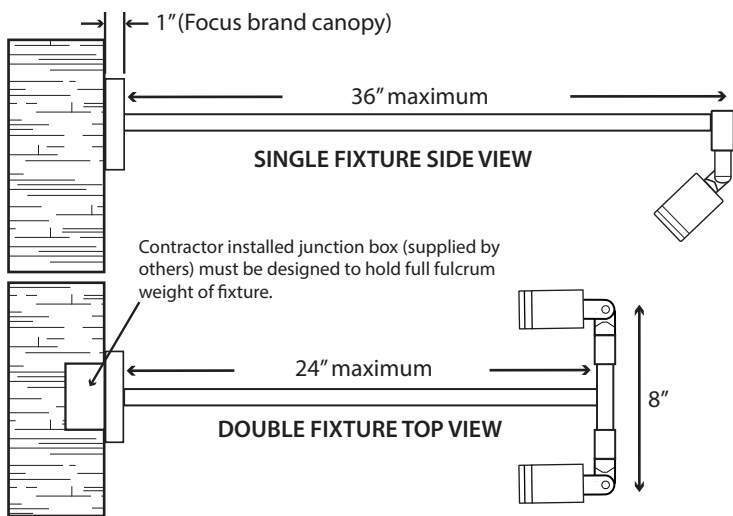


CAP STYLE



CANOPY STYLES

EXTENSION POLE STYLES

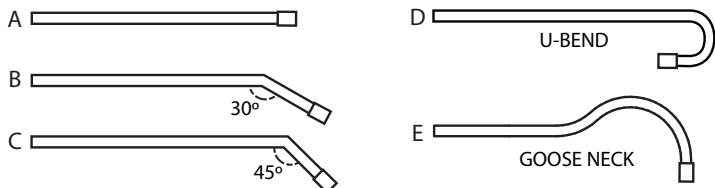

SPECIFICATIONS

Machined brass cylinder & threaded cap with adjustable die cast 240° swivel; extruded brass extension pole

Max Wattage: 20w

Lamp Options: MR16, MR16 LED

Socket:
12v - High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

Wiring:
12v - Black 18/2 SPT-1W 8" from base of fixture

Power Supply:
12v - Remote 12v transformer or internal hard wire transformer (not included)

Finish: See color options in ordering information below

IP54



SLS-08- 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8 - 9 - 10 - 11

ORDERING INFORMATION

1. MATERIAL	
A: BRASS RXD08 12 V	
B: BRASS RXD08 GU10 120 V	
2. FIXTURE TYPE	
1: SINGLE	
2: DOUBLE	
3. LIGHT SOURCE	
NL: NO LAMP, BI PIN SOCKET	
1: 3W ARROW SUPER SAVER MR16 15°	L22
2: 3W ARROW SUPER SAVER MR16 36°	L24
3: 3W ARROW SUPER SAVER MR16 80°	L26
4: 5W ARROW SUPER SAVER MR16 15°	L34
5: 5W ARROW SUPER SAVER MR16 36°	L36
6: 5W ARROW SUPER SAVER MR16 80°	L38
7: 7W ARROW SUPER SAVER MR16 15°	L46
8: 7W ARROW SUPER SAVER MR16 36°	L48
9: 7W ARROW SUPER SAVER MR16 80°	L50
10: 3W ARROW SUPER SAVER MR16 15° GU10	L106
11: 3W ARROW SUPER SAVER MR16 36° GU10	L108
12: 3W ARROW SUPER SAVER MR16 80° GU10	L110
13: 5W ARROW SUPER SAVER MR16 15° GU10	L114
14: 5W ARROW SUPER SAVER MR16 36° GU10	L116
15: 5W ARROW SUPER SAVER MR16 80° GU10	L118
16: 7W ARROW SUPER SAVER MR16 15° GU10	L124
17: 7W ARROW SUPER SAVER MR16 36° GU10	L126
18: 7W ARROW SUPER SAVER MR16 80° GU10	L128
4. CAP STYLE	
A: ANGLE CAP	
B: FLAT CAP	
5. LENS TYPE	
2: FLAT LENS	
3: STEPPED FLAT LENS	
6. LENS ENHANCEMENT	
0: NO LENS ENHANCEMENT	
A: LINEAR SPREAD	
B: WIDE SOFTENER	
C: BLUE	
D: GREEN	

7. GLARE SHIELDING	
0: NO SHIELDING	
H: HEX CELL LOUVER	
8. EXTENSION POLE LENGTH	
12: 12 INCHES	
18: 18 INCHES	
24: 24 INCHES (MAX FOR DOUBLE)	
30: 30 INCHES	
36: 36 INCHES (MAX SINGLE)	
CUSTOM: (ADDER PER INCH)	
9. EXTENSION POLE STYLE	
A: STRAIGHT	
B: 30° BEND	
C: 45° BEND	
D: U BEND (PROVIDE SPEC)	
E: GOOSE NECK (PROVIDE SPEC)	
F: CUSTOM BEND (PROVIDE SPEC)	
10. CANOPY	
0: NO CANOPY (1/2" NPS REQUIRED)	
2: FA-24-LGCST BRASS ROUND	
4: FA-22-CST BRASS RECTANGLE	
11. COLOR	
BRS: UNFINISHED BRASS (STANDARD)	
POWDER COLOR FIXTURE	
POWDER COLOR POLE	
POWDER COLOR CANOPY	
ACID TREATMENT FIXTURE	
ACID TREATMENT POLE	
ACID TREATMENT CANOPY	