



MR16 LED FL-LED-MR16GC-85D-30

TYPE


GO GREEN

Replaces 75W HALOGEN

12v Only

8.5w MR16 PLUG & PLAY LED FOR GU5.3 BI-PIN SOCKETS
SUITABLE FOR ENCLOSED FIXTURES AND WET LOCATION RATED





- 25,000 Hours L7 Average Rating (rated life to 70% initial light output)
- Compact size 1:1 form factor compared to Halogen MR16
- 580 Lumens (equivalent to 75w halogen w/ 80% energy savings)
- High CRI 92 (Color Rendering Index)
- 3000K Warm White Color
- Cool Beam, No UV or IR
- Wide Input Voltage Range of 10v - 15v
- **Dimmable**
- DOE LM79 Tested / LM80 Compliant
- Power Factor >90%
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- Available in 35° Flood or 15° Spot
- 12v AC/DC input
- 3 Year Limited Warranty



ORDERING INFORMATION

CATALOG NO.	WATTAGE	VOLTAGE	VOLTAGE RANGE	LUMEN OUTPUT	COLOR TEMP	BEAM ANGLE	BASE
FL-LED-MR16GC-85D-30-15	8.5w	12v	10v-15v	580	3000K	SP 15°	GU5.3 Bi Pin
FL-LED-MR16GC-85D-30-35	8.5w	12v	10v-15v	580	3000K	FL 35°	GU5.3 Bi Pin

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

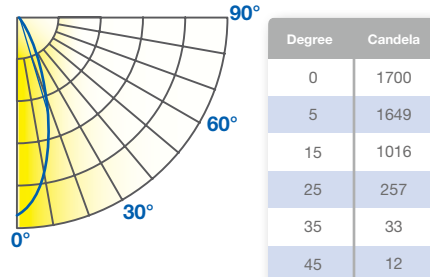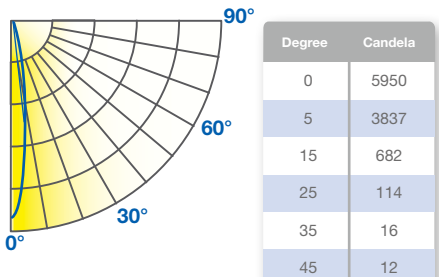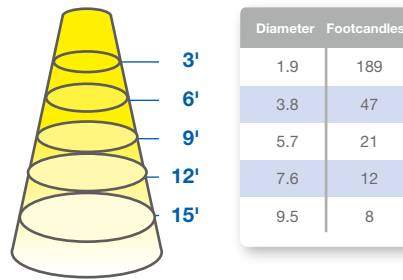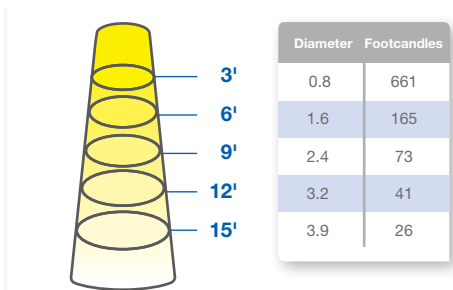

FL-LED-MR16GC-85D-30-15

FL-LED-MR16GC-85D-30-35