

# DL50 PROJECT: TYPE: DATE:

CATALOG NUMBER:









DL50 PAR30 Series

CATALOG ORDER LOG	GIC CONTRACTOR OF THE CONTRACT	
EXAMPLE:	DL50L154BLT	
FIXTURE		
DL	Directional Light	
SERIES		
50		
LED TYPE		
☐ L152 ☐ L154 ☐ L148 ☐ L150 ☐ LEDM20	10w PAR30 Super Saver LED 15° (120-Volt) 10w PAR30 Super Saver LED 36° (120-Volt) 10w PAR30 Super Saver LED 15° (120-277-Volt) 10w PAR 30 Super Saver LED 36° (120-277-Volt) 20w LED Module	
OPTICS		
Blank ☐ 15 ☐ 40 ☐ 60 ☐ 160	PAR 30 (Beam Angle Supplied by LED) 15° (LED Module Only) 40° (LED Module Only) 60° (LED Module Only) 160° No Optics (LED Module Only)	
FINISH		
BLT = Black Texture Aluminum  ☐ BRT = Bronze Texture Aluminum  ☐ BRS = Unfinished Brass		

#### MOUNTING

FA26BLT (120v-277v Mounting Pedestal, Cast Aluminum Cap, Black Texture) FA26BRS (120v-277v Mounting Pedestal, Cast Brass Cap, Unfinished) FAJBOX (Brass Junction Box, 1/2" NPS Female on cover)

Pantone and RAL colors (enter RAL or Pantone number at end of part number)

#### VOLTAGE


120V-277V Depending on Selected LED Source

Premium and Acid finishes (see page 4)










DL50

PROJECT: TYPE: DATE:

CATALOG NUMBER:


### DIMENSIONS

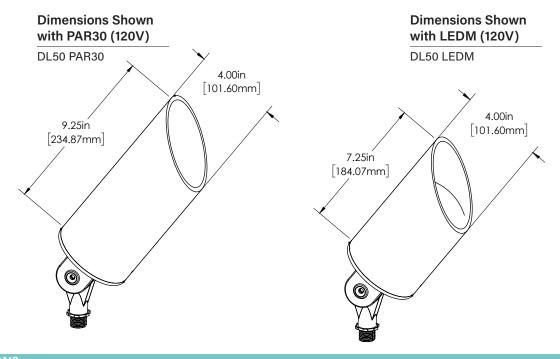

SPECIFICATIONS		
INTERNALS	VOLTAGE	120V-277V
	WATTAGE	10W (PAR30)   20W (LED Module)
	LUMENS	1000lm (PAR30)   1800lm (LED Module)
	WIRING	120V-277V Black 12" pigtail from driver
	DRIVER	120V-277V remote driver HW1260LED (Must use FA2660W post or outdoor rated junction box)
	LENS	High impact clear tempered convex glass
	O-RING	2x - 70 Durometer 400° red silicone
	OPTICS	LED MODULE: Interchangeable: 15° Spot, 40° Narrow Flood, 60° Wide Flood, 160° Very Wide Flood (no optics)
EXTERNALS	HOUSING	Extruded Aluminum Brass
	HEAT SINK	Cast Aluminum Cast Brass
	SWIVEL	Cast Aluminum, Cast Brass (240° rotation)
	CAP	Matching Aluminum, Brass,
	MOUNT	120V-277V: Mounting options not supplied. Order separately FAJBox or other outdoor rated mount (see accessories on page 3)
	FINISH	Aluminum: Polyester textured powder coat (More options available on page 4) Brass: Acid finishes (More options available on page 4)
	LISTINGS	IP66. Indoor/Outdoor use. Suitable for wet locations





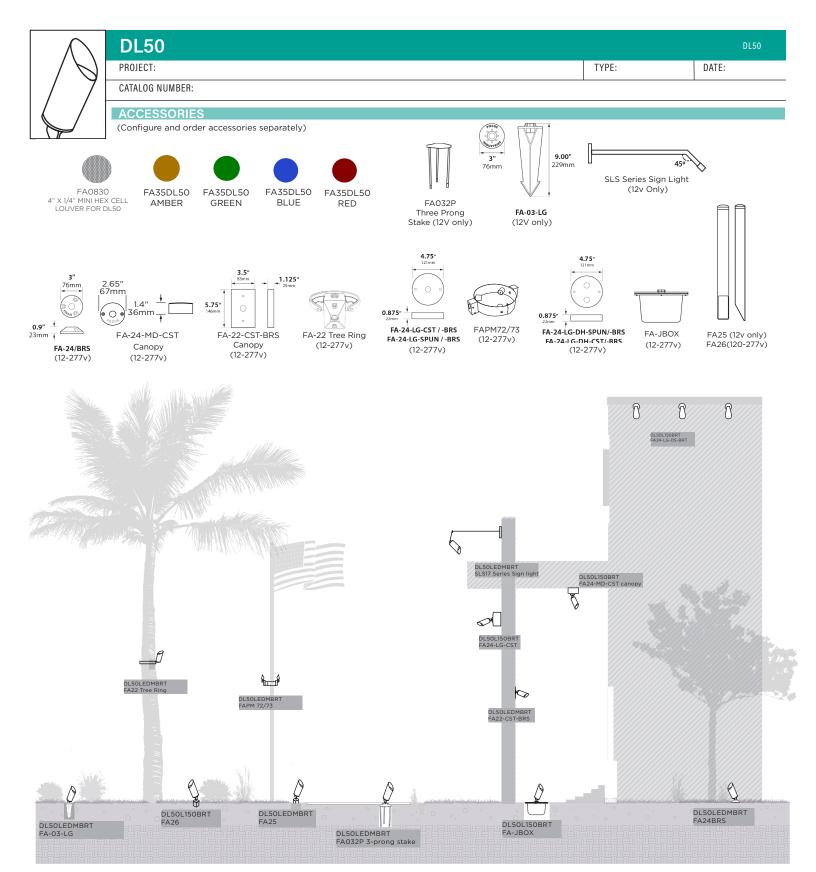

Images enhanced to illustrate usage of mounting options. Drawings not to scale. (see page 2 for product dimensions)








# DL50


PROJECT: TYPE: DATE:


CATALOG NUMBER:


### LIGHTING DISTRIBUTION










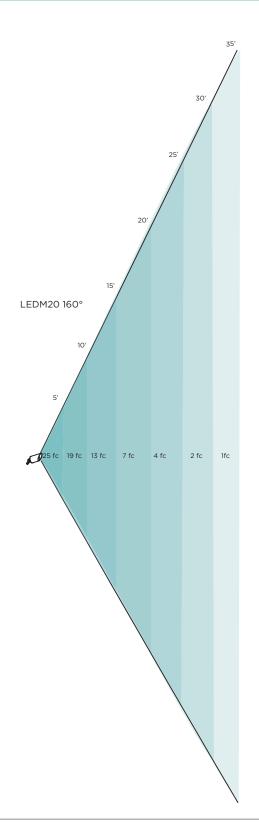










DL50 DL50


PROJECT:

CATALOG NUMBER:





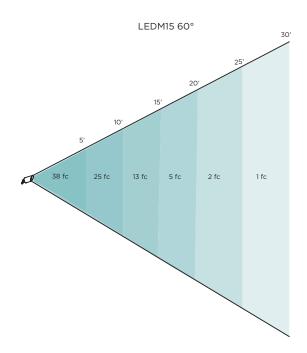

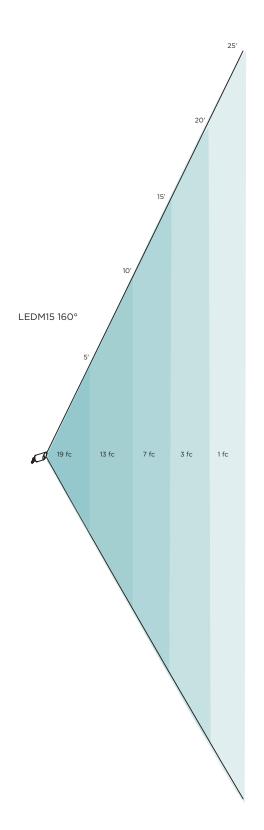

TYPE:

DATE:







# **DL50**

TYPE:


DATE:


CATALOG NUMBER:

PROJECT:

### LIGHTING DISTRIBUTION

#### PAR30 15°





## **FINISHES**

### STANDARD FINISHES



(-BLT)





**Bronze Texture** (-BRT)

#### **CUSTOM FINISHES** Supply RAL or Pantone here

RAL#:

Need help finding a RAL color? https://www.ralcolor.com/

PANTONE #:

Need help finding a Pantone color? https://www.pantone.com/color-finder

#### **PREMIUM FINISHES**



Black Magic (-BKM)











White Texture (-WTX)









(-WBR)





(-RBV)



(-HTX)



(-LUN)

**ACID FINISHES** Brass and Copper fixtures only



Copper (-CAR)

Brass (-BAR)



(-BAT)



Brass (-BAV)



SCAN FOR FULL SIZE COLOR SWATCHES



