



Designed.
Manufactured.
In the USA



landscape • architectural • hospitality • entertainment • illumination



INTRODUCING


SL64 LED SURFACE MOUNT




Model Shown
SL64DL114BRBKM

ALUMINUM

BRASS

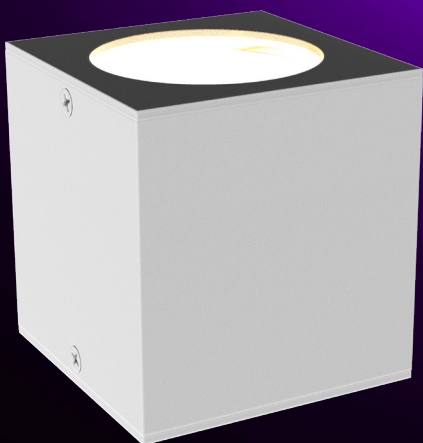



SL64213EOSMWHT

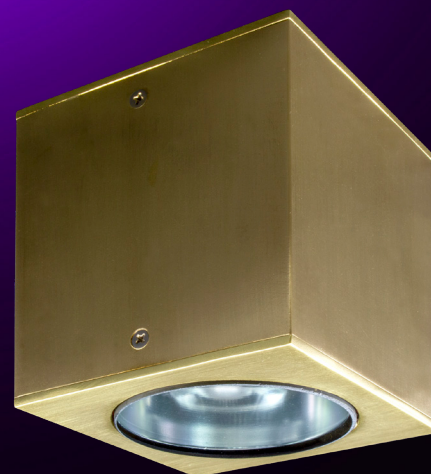

SL64DL128BRS

NEW SL64 CUBE

DOWN LIGHT

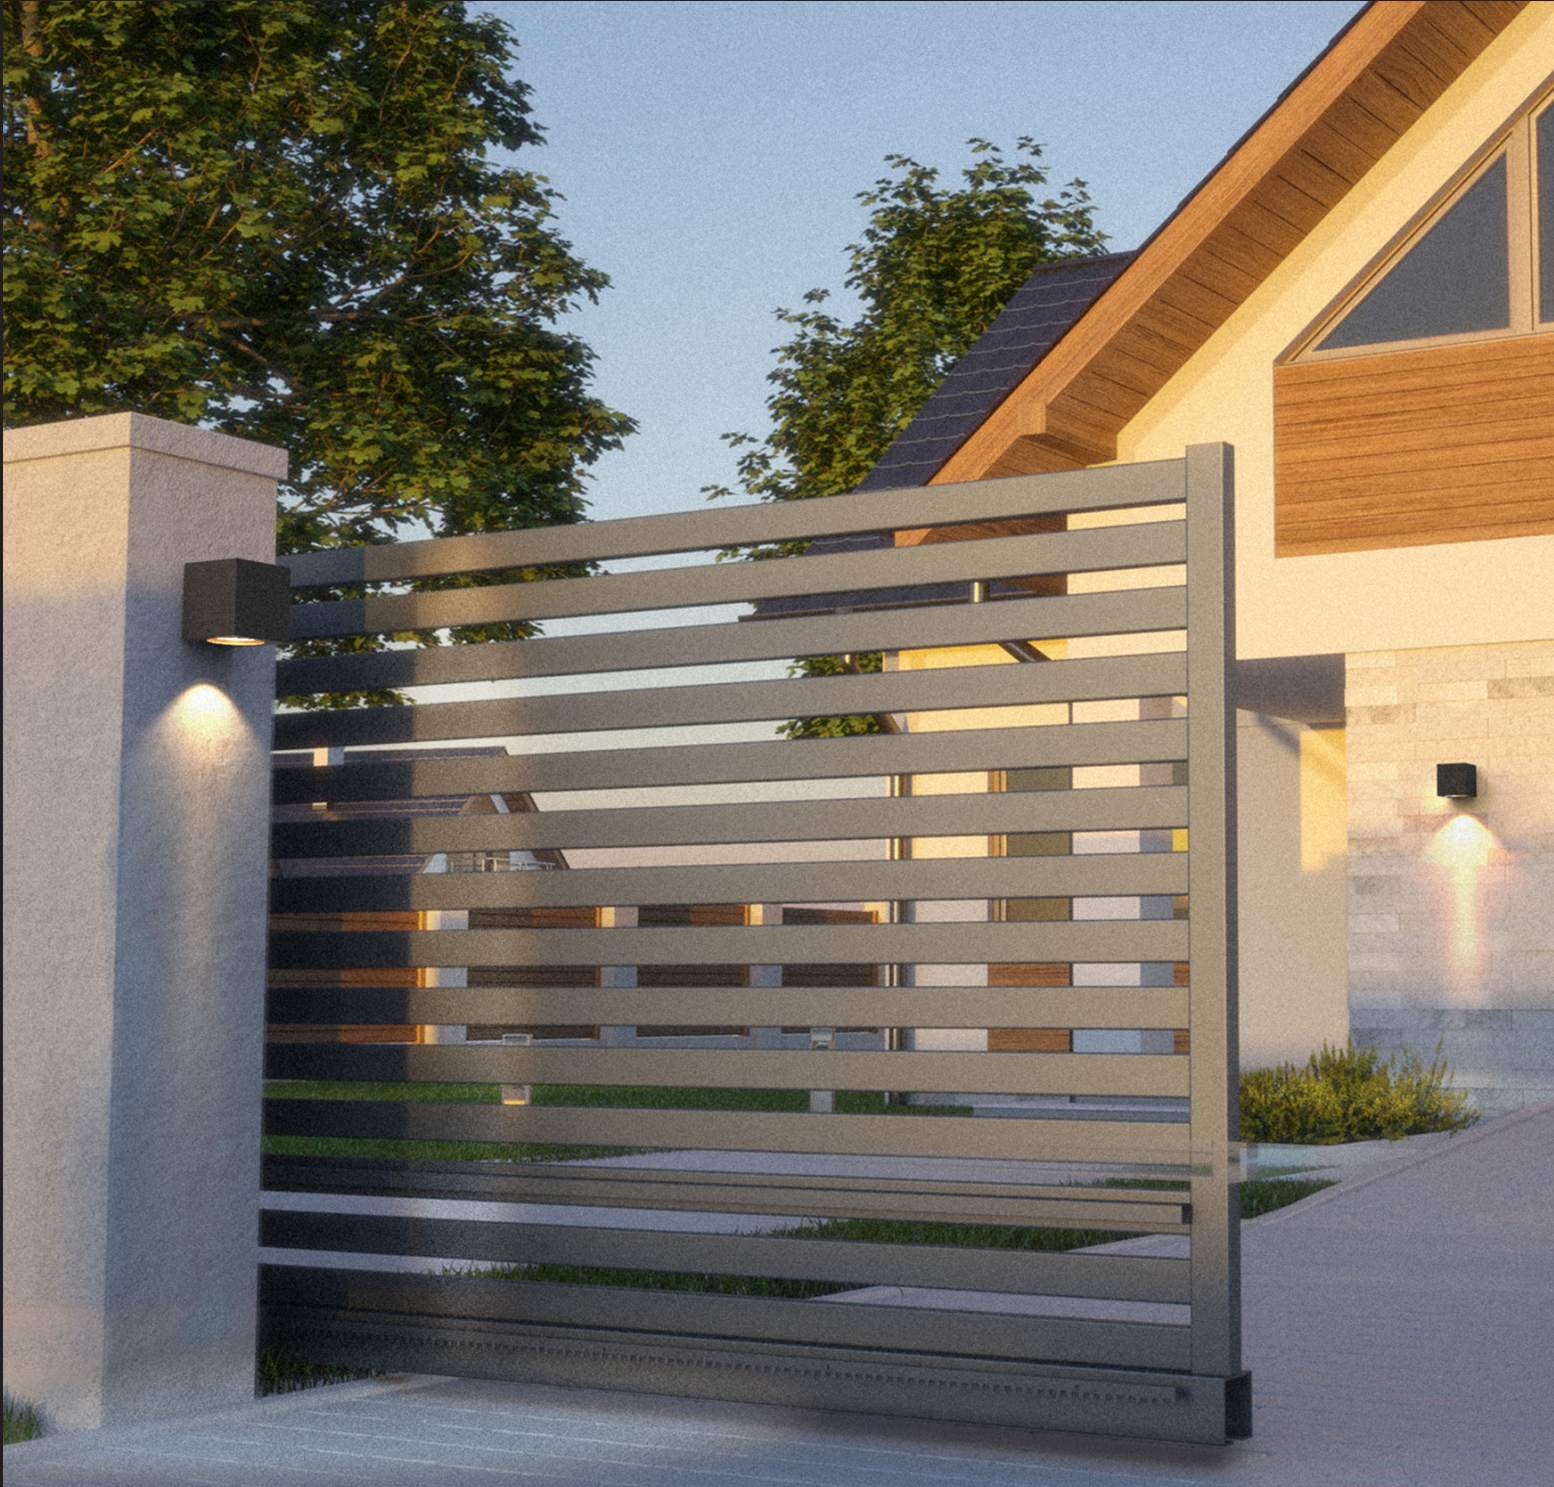

Model Shown
SL64DL108BRT

TO PLACE ORDERS – TOLL FREE (888)882.1350
ORDERS@FOCUSINDUSTRIES.COM

SL64D

DOWNLIGHT CUBE

SPECIFICATIONS

CONSTRUCTION: 4" x 4" Aluminum or Brass surface mount downlight

LENS: Clear glass lens

LAMP SUPPLIED:3W MR16 Super Saver LED 36° (L24), 3000K, 40,000 hrs

LAMP OPTIONS: 5W MR16 Super Saver LED 36° (L36), 3000K, 40,000 hrs

7W MR16 Super Saver 36° (L48), 3000K, 40,000 hrs

SOCKET: GU5.3 socket base.

WIRING: Black 2 foot 18/2 zip cord from base of fixture

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

FINISH: Aluminum - Powder Coat Finish

Brass - Unfinished, Brass - Acid Finish

POWDER COAT OPTIONS AVAILABLE (refer to last page for powder coat color options)

*Powder coat finishes over Brass are custom and Non-Returnable

120V OPTION:


LAMP OPTION: 3W MR16 GU10 Base, 36° (L108), 3000K, 40,000 hrs

5W MR16 GU10 Base, 36° (L116), 3000K, 40,000 hrs

7W MR16 GU10 Base, 36° (L126), 3000K, 40,000 hrs

SOCKET: GU10 Socket Base (120V)

MOUNTING: 4" x 4" Aluminum or Brass Mounting Bracket (120V)

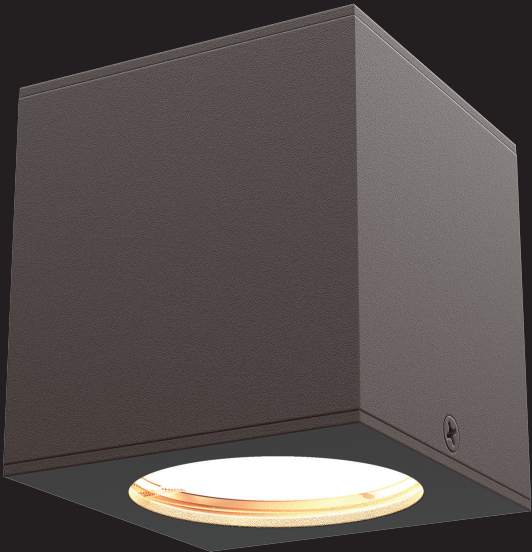

SL64DL108BRT
(DOWNLIGHT)

ORDERING INFORMATION

		LAMP	SHIP WEIGHT
SL64DL24BLT	4" X 4" Surface Mount Downlight, Aluminum , Black Texture	3w MR16, GU5.3	2.0 lbs.
SL64DL24(COLOR)	4" X 4" Surface Mount Downlight, Aluminum , Color Powder Coat	3w MR16 GU5.3	2.0 lbs.
SL64DL24BRS	4" X 4" Surface Mount Downlight, Brass , Unfinished	3w MR16 GU5.3	3.0 lbs.
SL64DL24(ACID)	4" X 4" Surface Mount Downlight, Brass , Acid Treatment	3w MR16 GU5.3	3.0 lbs.

4" X 4" SURFACE MOUNT DOWNLIGHT, MOUNTING BRACKET INCLUDED (120V)

SL64DL108BLT	4" X 4" Surface Mount Downlight, Aluminum , Black Texture	3w MR16 GU10	2.0 lbs.
SL64DL108(COLOR)	4" X 4" Surface Mount Downlight, Aluminum , Color Powder Coat	3w MR16 GU10	2.0 lbs.
SL64DL108BRS	4" X 4" Surface Mount Downlight, Brass , Unfinished	3w MR16 GU10	3.0 lbs.
SL64DL108(ACID)	4" X 4" Surface Mount Downlight, Brass , Acid Treatment	3w MR16 GU10	3.0 lbs.

ACCESSORIES

FA35SL64AMBER	Amber Acrylic Lens 3.375" OD x 0.125" ± 0.03" TH
FA35SL64BLUE	Blue Acrylic Lens 3.375" OD x 0.125" ± 0.03" TH
FA35SL64GREEN	Green Acrylic Lens 3.375" OD x 0.125" ± 0.03" TH
FA35SL64RED	Red Acrylic Lens 3.375" OD x 0.125" ± 0.03" TH

ACRYLIC COLOR LENS OPTIONS:




-AMBER

(FA35SL64AMBER)




-BLUE

(FA35SL64BLUE)



-GREEN


(FA35SL64GREEN)



-RED

(FA35SL64RED)

DIMENSIONAL DRAWINGS

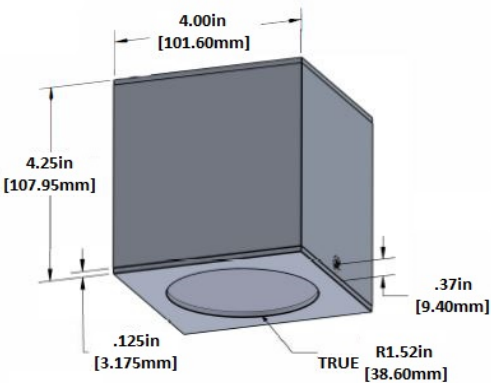


DOWN LIGHT

SL64DL24
(SHOWN AS DOWNLIGHT)

NEW SL64 CUBE

UP-DOWN LIGHT



Model Shown
SL64213EOSMBRSBKM

TO PLACE ORDERS – TOLL FREE (888) 882.1350
ORDERS@FOCUSINDUSTRIES.COM

SL64

UP-DOWN LIGHT CUBE

SPECIFICATIONS

CONSTRUCTION: 4" x 4" Aluminum or Brass surface mount up-down light

LENS: Frosted / High impact Glass Lens

LAMP SUPPLIED: 2x 13W EOS Module

LAMP OPTIONS: 2x 6W EOS Module

WIRING: Black 2 foot 18/2 zip cord from base of fixture

MOUNTING: 4" x 4" Aluminum mounting bracket, or 4" x 4" Brass mounting bracket (Brass bracket only available on Brass fixture)

FINISH: Aluminum - Powder Coat Finish

Brass - Unfinished, Brass - Acid Finish

POWDER COAT OPTIONS AVAILABLE (refer to last page for powder coat color options)

*Powder coat finishes over Brass are custom and Non-Returnable



SL64213EOSMBRS
(UP-DOWN LIGHT)

ORDERING INFORMATION

LAMP SHIP WEIGHT

SL64213EOSMBLT	4" X 4" Surface Mount Up/Down light, Aluminum, Black Texture	2x 13w EOS Module	2.0 lbs.
SL64213EOSMBRS	4" X 4" Surface Mount Up/Down light, Brass	2x 13w EOS Module	3.0 lbs.

ACCESSORIES

FA35SL64AMBER	Amber Acrylic Lens 3.375" OD x 0.125" ± 0.03" TH
FA35SL64BLUE	Blue Acrylic Lens 3.375" OD x 0.125" ± 0.03" TH
FA35SL64GREEN	Green Acrylic Lens 3.375" OD x 0.125" ± 0.03" TH
FA35SL64RED	Red Acrylic Lens 3.375" OD x 0.125" ± 0.03" TH

ACRYLIC COLOR LENS OPTIONS:




-AMBER

(FA35SL64AMBER)




-BLUE

(FA35SL64BLUE)



-GREEN


(FA35SL64GREEN)



-RED

(FA35SL64RED)

DIMENSIONAL DRAWINGS

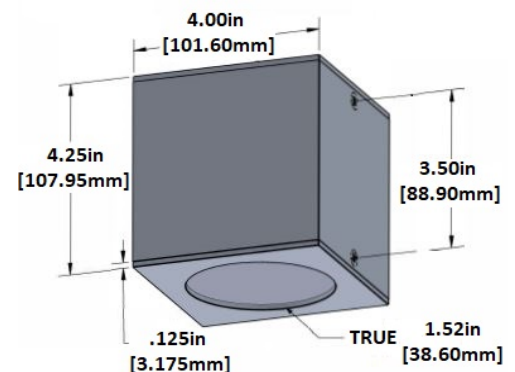

UPDOWN LIGHT

SL64UD213EOSM

(SHOWN AS UP-DOWN LIGHT)

LEDs AND ACCESSORIES

12 - 120 VOLT LED OPTIONS (Up-Down Fixtures use EOS LED Module only)



(FLEDMR16SS3W)
3W MR16, GU5.3 BI-PIN BASE,
(L22) 15°, (L24) 36°, (L26) 80°
270 Lumen, 3000K, 40,000 hr



(FLEDMR16SS1203W)
3W MR16, GU10 BASE,
(L106) 15°, (L108) 36°, (L110) 80°
270 Lumen, 3000K, 40,000 hr



(RFLM106R30120)
6W EOS Module
500 Lumen, 3000K



(FLEDMR16SS5W)
5W MR16, GU5.3 BI-PIN BASE,
(L34) 15°, (L36) 36°, (L38) 80°
270 Lumen, 3000K, 40,000 hr



(FLEDMR16SS1205W)
5W MR16, GU10 BASE,
(L114) 15°, (L116) 36°, (L118) 80°
270 Lumen, 3000K, 40,000 hr



(RFLM113R30120)
13W EOS Module
800 Lumen, 3000K



(FLEDMR16SS7W)
7W MR16, GU5.3 BI-PIN BASE,
(L46) 15°, (L48) 36°, (L50) 80°
270 Lumen, 3000K, 40,000 hr



(FLEDMR16SS1207W)
7W MR16, GU10 BASE,
(L124) 15°, (L126) 36°, (L128) 80°
270 Lumen, 3000K, 40,000 hr


ACRYLIC COLOR LENS OPTIONS:




-AMBER
(FA35SL64AMBER)



-BLUE
(FA35SL64BLUE)



-GREEN
(FA35SL64GREEN)



-RED
(FA35SL64RED)

FINISH OPTIONS

POWDER COAT FINISHES

BLACK SEMI GLOSS	BLACK TEXTURE	BRONZE TEXTURE	CAMEL	CHROME POWDER	HUNTER GREEN TEXTURE	RUBBED VERDE	RUST	WHITE TEXTURE	WEATHER BROWN	WEATHER IRON	STUCCO	WHITE GLOSS
-BLK	-BLT	-BRT	-CAM	-CPR	-HTX	-RBV	-RST	-WTX	-WBR	-WIR	-STU	-WHT

BRASS FINISHES

POWDER COAT FINISHES		ACID FINISHES		
BLACK MAGIC	DARK BRONZE	BRASS ACID RUST	BRASS ACID VERDE	BLACK ACID TREATMENT
-BKM	-DBZ	-BAR	-BAV	-BAT

* Powder Coat Finishes over Brass are custom and Non-Returnable



DESIGNED.
MANUFACTURED.
IN THE USA

go green
led solutions



25301 Commercentre Drive, Lake Forest, CA. 92630
(949) 830-1350 | (888)882-1350 | www.focusindustries.com

TO PLACE ORDERS - TOLL FREE (888)882.1350
ORDERS@FOCUSINDUSTRIES.COM

FOR MORE INFORMATION
MARKETING@FOCUSINDUSTRIES.COM