



# ARROW LED FL-LED-MR16-SS7W


TYPE

**GO GREEN**  
EXCEEDS 50w HALOGEN

**12v Only**  
7w MR16 PLUG & PLAY LED FOR GU5.3 BI-PIN SOCKETS  
COMPATIBLE WITH MOST 12v MR16 ENCLOSED FIXTURES

**120v Only**  
7w GU10 BASE MR16 COMPATIBLE WITH MOST 120v MR16 ENCLOSED FIXTURES

- Long Life - 40,000 Hours L7 Average Rating (rated life to 70% initial light output)
- High Power White LED Light Source
- 550 Lumens (exceeds 50w Halogen)
- CRI 83 (Color Rendering Index)
- 2700K - 3000K Warm White Color
- Cool Beam, No UV or IR
- Mercury Free
- Input Voltage Range  
12v: 9v - 15v  
120v: 110v - 130v
- Dimmable
- DOE LM79 Tested / LM80 Compliant
- Power Factor >90%
- 5 Year Limited Warranty
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- ETL/cETL/CE & Energy Star Certified
- Available in 15° / 36° / 80°
- Must be installed in sealed fixture
- 12v LEDs must be powered by a magnetic transformer or 12v DC power source ( ie: Battery)

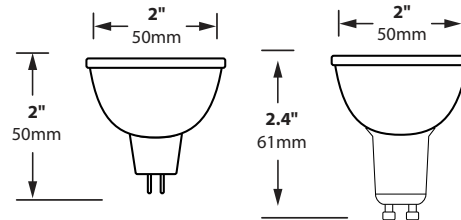

## ORDERING INFORMATION

CATALOG NO.	WATTAGE	VOLTAGE	VOLTAGE RANGE	LUMEN OUTPUT	COLOR TEMP	BEAM ANGLE	BASE
FL-LED-MR16SS7W15	7w	12v	9v - 15v	550	2700K-3000K	SP 15°	GU5.3 Bi-Pin
FL-LED-MR16SS7W36	7w	12v	9v - 15v	550	2700K-3000K	FL 36°	GU5.3 Bi-Pin
FL-LED-MR16SS7W80	7w	12v	9v - 15v	550	2700K-3000K	VWFL 80°	GU5.3 Bi-Pin
FL-LED-MR16SS1207W15	7w	120v	110v - 130v	550	2700K-3000K	SP 15°	GU10
FL-LED-MR16SS1207W36	7w	120v	110v - 130v	550	2700K-3000K	FL 36°	GU10
FL-LED-MR16SS1207W80	7w	120v	110v - 130v	550	2700K-3000K	VWFL 80°	GU10

## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

