



landscape • architectural • hospitality • entertainment • illumination

SLS-LM SERIES SIGN LIGHTING

go green
led solutions

TYPE

SPECIFICATIONS

CONSTRUCTION: Extruded housing with heavy duty die cast adjustable aluminum swivels. Aluminum extension pole and mounting canopies.

LENS: High impact clear acrylic lens

LED SUPPLIED: 10w 2700K LED Module 863 Lumens (per module)

WIRING: 120V- Standard 120V Black, White, and Green

LED POWER SUPPLY: 120Vac - 277Vac universal input

SOCKET: None (LED Module)


FINISH: Aluminum. Powder Coat options available.

IP55



CE



CANOPY OPTIONS

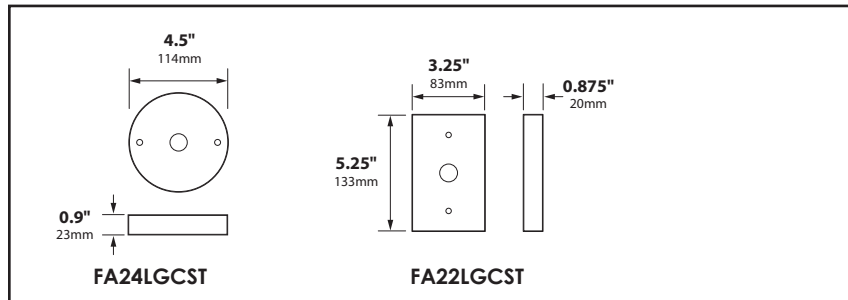

POLE STYLE OPTIONS

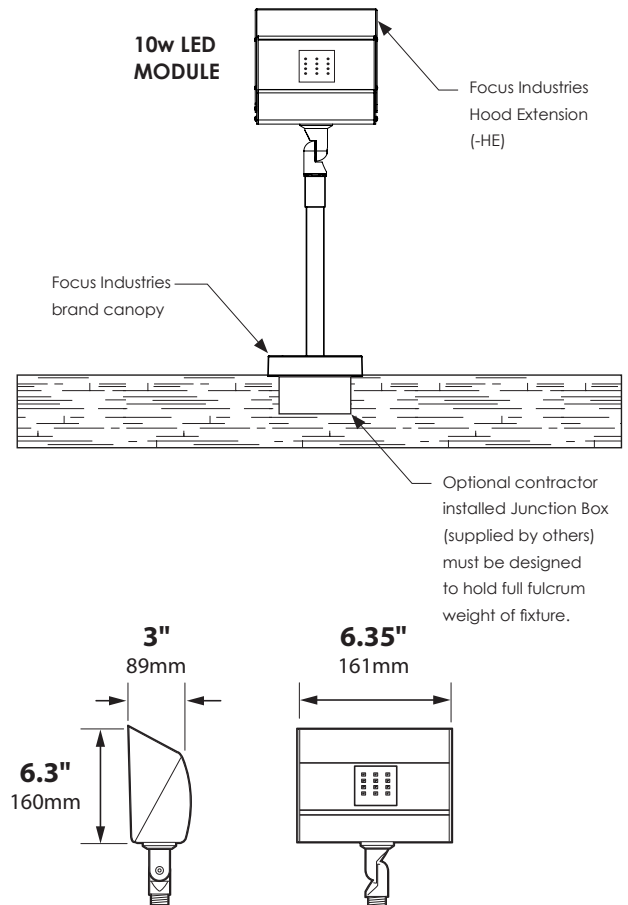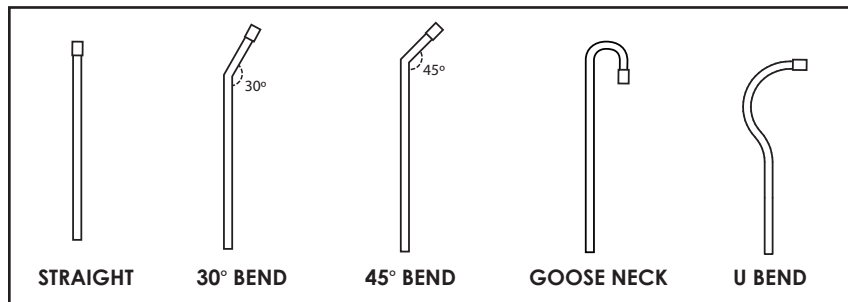

Generated Part Number

SLSLM- 1 2 3 4 5 6 7 8 9 10 11

ORDERING INFORMATION

1) MATERIAL:

A. Aluminum

2) VOLTAGE:

1. 120V-277V

3) LIGHT SOURCE:

01. 10W LED Module 3000K

4) HOOD STYLE:

0. No hood extension
A. Hood extension

5) LENS TYPE:

0. Standard clear
1. Sandblasted softner lens
2. White acrylic

6) LENS ENHANCEMENT:

0. No lens enhancement
A. Blue gel
B. Green gel

7) GLARE SHIELDING:

0. No shielding
H. Hex cell louver

8) EXTENSION POLE LENGTH:

NP. No Pole
12. 12 Inches
18. 18 Inches
24. 24 Inches
30. 30 Inches
36. 36 Inches
Custom: (Added per inch)

9) EXTENSION POLE STYLE:

A. Straight
B. 30 bend
C. 45 bend
D. U bend (provide specs)
E. Goose neck (provide specs)
F. Custom bend (provide specs)

10) CANOPY:

0. No canopy (1/2" NPS required)
1. FA24LGCST Aluminum round
2. FA22CST Aluminum rectangle

11) COLOR:

1. BLT: Black texture only (standard)
2. Other powder coat color (fixture)
3. Other powder coat color (pole)
4. Other powder coat color (canopy)

For Questions Call 1 (888) 882-1350