



Designed  
In the USA



landscape • architectural • hospitality • entertainment • illumination



BRASS

# Underwater Lighting

Brochure



## UWL23'

Underwater Lights 2023

LANDSCAPE • ARCHITECTURAL • HOSPITALITY • ENTERTAINMENT • ILLUMINATION

# SPECIALTY LIGHTING UNDERWATER LIGHTS

12v

## SL11 LED MODULE SERIES



**SL11LEDMBRS**  
7/11/15 or 20w  
LED Module  
Cast Brass  
Underwater  
Light; 15' cord



**SL11ABLEDMBRS**  
7/11/15 or 20w  
LED Module  
Cast Brass  
Underwater Light  
w/ aiming bracket  
& 15' cord



**SL11ABACLEDMBRS**  
7/11/15 or 20w LED  
Module Cast Brass  
Underwater Light w/  
aiming bracket,  
collar & 15' cord

<b>HOUSING</b>	Cast brass
<b>AIMING BRACKET</b>	Cast brass w/ black composite thumb knobs
<b>LENS</b>	High impact clear tempered flat glass
<b>LIGHT SOURCE</b>	7w,11w,15w or 20w integrated LED module with 12v driver on board
<b>OPTICS</b>	15° spot, 40° flood, 60° wide flood or no optics 160° very wide flood
<b>SOCKET</b>	None, hard wired LED module
<b>WIRING</b>	15 feet 18/2 SJTOW cord (additional length available in 5ft increments)
<b>CONNECTOR</b>	Brass, nickel plated liquid tight straight bushing from side of fixture
<b>MOUNTING</b>	Surface mount aiming bracket on AB models For securing to wall or floor use appropriate stainless steel screws and holes (provided)
<b>FINISH</b>	Unfinished brass
<b>FINISH OPTIONS</b>	Black acid treatment add (-BAT) to catalog number, Brass acid rust add (-BAR) to catalog number

### COLOR LENS OPTIONS AVAILABLE



Red (add -R)  
Amber (add -A)  
Green (add -G)  
Blue (add -B)





# SPECIALTY LIGHTING UNDERWATER LIGHTS

12v

## SL33 MR16 LED SERIES



**SL33ABL24**  
SL-33-LED w/  
aiming bracket



**SL33ABACL24BAT**  
SL-33-LED w/ aiming  
bracket & angle collar



**SL33SMACL24BAR**  
SL-33-LED w/ side  
mount & angle collar



**SL33ACL24**  
SL-33-LED w/  
angle collar



**SL33SML24**  
SL-33LED w/  
side mount



**SL33L24**  
3w MR16 LED (36°)  
40,000 hour  
Cast Brass  
Underwater Light  
w/15' cord

HOUSING	Cast brass
AIMING BRACKET	Cast brass w/ black composite thumb knobs
LENS	High impact clear tempered flat glass
LED SUPPLIED	3w ARROW MR16 LED (40,000 hours average rating)
LED OPTIONS	5w ARROW MR16 LED (40,000 hours average rating) 7w ARROW MR16 LED (40,000 hours average rating) 8.5w Green Creative MR16 LED (25,000 hours average rating)
SOCKET	GU5.3 Bi Pin ceramic with 250°C lead wires
WIRING	15 feet 18/2 SJTOW cord
CONNECTOR	Brass, nickel plated liquid tight straight bushing from bottom of fixture side mount wire (-SM) available
MOUNTING	Surface mount aiming bracket on AB models For securing to wall or floor use appropriate stainless steel screws and holes (provided)
FINISH	Unfinished brass
FINISH OPTIONS	Black acid treatment add (-BAT) to catalog number, Brass acid rust add (-BAR) to catalog number
COLOR LENS OPTIONS AVAILABLE	Red (add -R) Amber (add -A) Green (add -G) Blue (add -B)



# SPECIALTY LIGHTING UNDERWATER LIGHTS

12v

## SL40 MR8 LED SERIES



**SL40ACABL68**  
SL-40-LED w/  
aiming bracket  
& angle collar



**SL40ABL68**  
SL-40-LED w/  
aiming bracket



**SL40ACL68**  
SL-40-LED  
w/ angle  
collar



**SL40L68**  
3w MR11 LED  
(40°) 40,000 hour  
Cast Brass  
Underwater Light  
w/15' cord



**SL40ACSM68**  
SL-40-LED w/  
side mount &  
angle collar

<b>HOUSING</b>	Cast brass
<b>AIMING BRACKET</b>	Cast brass w/ black composite thumb knobs
<b>LENS</b>	High impact clear tempered flat glass
<b>LED SUPPLIED</b>	3w ARROW MR11 LED (40,000 hours average rating)
<b>SOCKET</b>	GU5.3 Bi Pin ceramic with 250°C lead wires
<b>WIRING</b>	15 feet 18/2 SJTOW cord
<b>CONNECTOR</b>	Brass, nickel plated liquid tight straight bushing from bottom of fixture
<b>MOUNTING</b>	Surface mount aiming bracket on AB models For securing to wall or floor use appropriate stainless steel screws and holes (provided)
<b>FINISH</b>	Unfinished brass
<b>FINISH OPTIONS</b>	Black acid treatment add (-BAT) to catalog number, Brass acid rust add (-BAR) to catalog number

### COLOR LENS OPTIONS AVAILABLE



Red (add -R)  
Amber (add -A)  
Green (add -G)  
Blue (add -B)



# SPECIALTY LIGHTING UNDERWATER LIGHTS

12v

## SL51 STARFISH SERIES



**SL51STBAT**  
3w MR16 LED,  
40,000 hour Cast  
Brass Underwater  
Light w/15' cord



**TOP VIEW**

<b>HOUSING</b>	Cast brass base & starfish top; Brass nickel-plated liquid tight straight bushing.
<b>LENS</b>	High impact clear tempered flat glass
<b>LED Supplied:</b>	3w ARROW MR16 LED (40,000 hrs)
<b>LED Options:</b>	5w ARROW MR16 LED (40,000 hrs) 7w ARROW MR16 LED (40,000 hrs) 8.5w Green Creative MR16 LED (25,000 hrs) 4w LED Panel (50,000 hours average rating)
<b>SOCKET</b>	GU5.3 Bi Pin ceramic with 250°C lead wires LED Panel models require no socket. LED is hard wired inside fixture
<b>WIRING</b>	15 feet 18/2 SJTOW cord
<b>CONNECTOR</b>	Brass, nickel plated liquid tight straight bushing
<b>MOUNTING</b>	None
<b>FINISH</b>	Unfinished brass
<b>FINISH OPTIONS</b>	Black acid treatment add (-BAT) to catalog number, Brass acid rust add (-BAR) to catalog number
<b>Additional Cord:</b>	<b>Sold</b> per foot in 5 ft lengths, (up to 100 feet) Add total number of feet to catalog number



### COLOR LENS OPTIONS AVAILABLE



Red (add -R)  
Amber (add -A)  
Green (add -G)  
Blue (add -B)

# SPECIALTY LIGHTING UNDERWATER LIGHTS

12v

## THE OCTOPUS JBOX




**FAH20JB**  
Underwater J-Box  
(w/25ft 12/2C feed  
wire) 5.50 Lbs

**“The OCTOPUS”** underwater J-Box is designed for connection of up to eight 12v 18/2 SJTOW cords for under water fixtures. Tap sizes available - PG9, PG11, 1/2”NPS & 3/4” NPS. For 1/2” or 3/4” service conduit contact FOCUS. For additional PG9 hole with plug, specify at time of order. NOTE: Brass liquid tight fittings recommended. Fitting size must match cable size to ensure water proof connection.

<b>CONSTRUCTION</b>	20 cubic inch cast brass body and cast brass cover
<b>GASKET</b>	Black silicone, 50 durometer
<b>FITTINGS</b>	Standard J-box not supplied with fittings. Brass, nickel plated PG9 Liquid Tight available. Specify number required at time of order
<b>FITTING OPTIONS</b>	Brass, nickel plated PG11 Liquid Tight Internal Connector: Teal high temperature thermal plastic housing with stainless steel barrel lugs and 3M dielectric sealing tape; 200 watt maximum load
<b>FEED WIRE</b>	Standard J-box not supplied with feed wire. 12-2C cable available in increments of 5 feet starting at 25 feet. Specify at time of order
<b>MOUNTING</b>	Surface mount bracket attached

Supplied standard without holes or fittings. To receive a tapped hole and liquid tight fitting specify at time of order. Specify number of fixture ports PLUS 1 feed for 12/2C lead wire eg: 4 = 3 Fixture ports plus 1 Lead Wire port. Designed for up to eight fixtures add (-1 to - 9) to above catalog number. Fits all FOCUS underwater fixtures. If you are using another manufacturers fixture you must specify the desired size and location of holes at time of order. Focus does not carry all types & sizes of liquid tight fittings. Warranty Disclaimer: Alterations of product are not recommended by FOCUS and voids warranty.

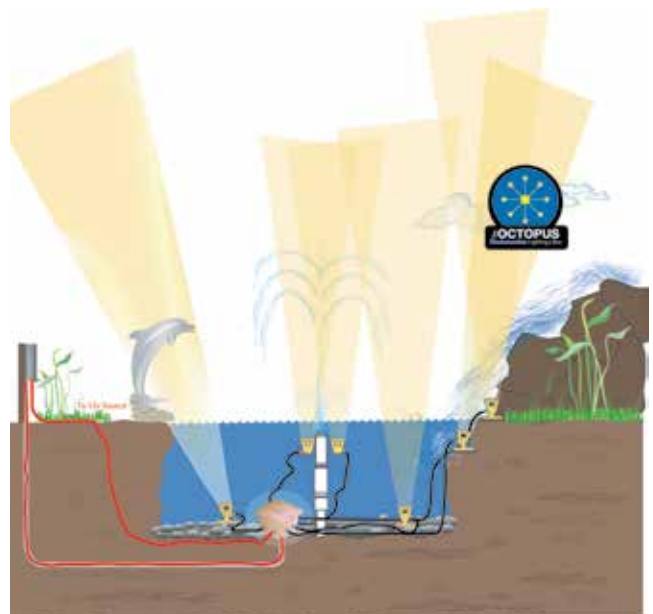







# UWL23'

Underwater Lights 2023

We are now  
*More Custom*  
THAN EVER BEFORE!

Resorts ▪ Hotels ▪ Restaurants  
Shopping Centers ▪ Universities ▪ Colleges ▪ Amphitheaters  
Amusement Parks ▪ Banks ▪ Sports Facilities  
Hospitals ▪ Luxury Condos ▪ Custom Homes



DESIGNED  
MANUFACTURED  
IN THE USA

© 2023 FOCUS INDUSTRIES. ALL RIGHTS RESERVED  
UNDERWATER BROCHURE 2023

Focus Industries  
25301 Commercentre Drive  
Lake Forest, CA. 92630  
(949)830-1350  
[www.focusindustries.com](http://www.focusindustries.com)

TO PLACE ORDERS:  
[ORDERS@FOCUSINDUSTRIES.COM](mailto:ORDERS@FOCUSINDUSTRIES.COM)  
TOLL FREE (888)882.1350