

RXD08 DIRECTIONAL LIGHT SPEC SHEET

RXD08

PROJECT:

TYPE:

DATE:

CATALOG NUMBER:



RXD08L24BRS
(Shown in Brass)



TAC



ETAC

CATALOG ORDER LOGIC

EXAMPLE: RXD08L24BRS

FIXTURE

RXD Remedy Series Directional Light

TYPE

08

DOWN LIGHT OPTION

☐ D

CAP OPTIONS

☐ TAC Threaded Angle Cap
☐ ETAC Extended Threaded Angle Cap

12 VOLT LED	WATT	SOCKET	DEGREE	KELVIN	LUMEN
-------------	------	--------	--------	--------	-------

☐ NL (No Lamp)					
☐ NLBP (No Lamp)		GU5.3 Bi-Pin			
☐ L22	3w	GU5.3 Bi-Pin	15°	3000K	270lm
☐ L24	3w	GU5.3 Bi-Pin	36°	3000K	270lm
☐ L26	3w	GU5.3 Bi-Pin	80°	3000K	270lm
☐ L34	5w	GU5.3 Bi-Pin	15°	3000K	450lm
☐ L36	5w	GU5.3 Bi-Pin	36°	3000K	450lm
☐ L38	5w	GU5.3 Bi-Pin	80°	3000K	450lm
☐ L40	5w	GU5.3 Bi-Pin	36°	Amber	585-595nm
☐ L46	7w	GU5.3 Bi-Pin	15°	3000K	550lm
☐ L48	7w	GU5.3 Bi-Pin	36°	3000K	550lm
☐ L50	7w	GU5.3 Bi-Pin	80°	3000K	550lm

120 VOLT LED	WATT	SOCKET	DEGREE	KELVIN	LUMEN
--------------	------	--------	--------	--------	-------

☐ NL (No Lamp)					
☐ NL120V		GU10			
☐ L106	3w	GU10	15°	3000K	270lm
☐ L108	3w	GU10	36°	3000K	270lm
☐ L110	3w	GU10	80°	3000K	270lm
☐ L114	5w	GU10	15°	3000K	450lm
☐ L116	5w	GU10	36°	3000K	450lm
☐ L118	5w	GU10	80°	3000K	450lm
☐ L119	5w	GU10	36°	Amber	585-595nm
☐ L124	7w	GU10	15°	3000K	550lm
☐ L126	7w	GU10	36°	3000K	550lm
☐ L128	7w	GU10	80°	3000K	550lm

OPTIONS

☐ NS No Stake
☐ 25F 25 Foot Fixture Lead Wire

FINISH (standard finishes listed)

BRS (Unfinished- Brass)
Premium and Acid Finishes (See page 5 for more color options)
Pantone & RAL Colors (Enter RAL or Pantone number at end of part number)

SHIP WEIGHT

Brass C27200 (3.0lbs)

ADDITIONAL INFORMATION

- LED's are dimmable with Triac dimming



IP65




landscape • architectural • hospitality • entertainment • illumination

FOCUS INDUSTRIES INC.
25301 COMMERCE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED
MANUFACTURED
IN THE USA





RXD08 DIRECTIONAL LIGHT SPEC SHEET

RXD08

PROJECT:

TYPE:


DATE:

CATALOG NUMBER:

DIMENSIONS

Dimensions Shown in Brass


Standard Cap

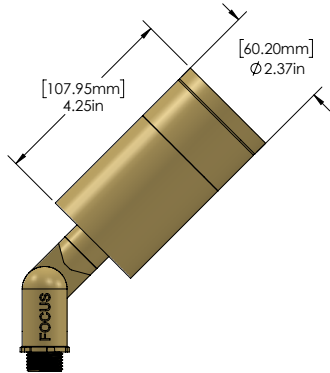

RXD08

Dimensions Shown in Brass


TAC

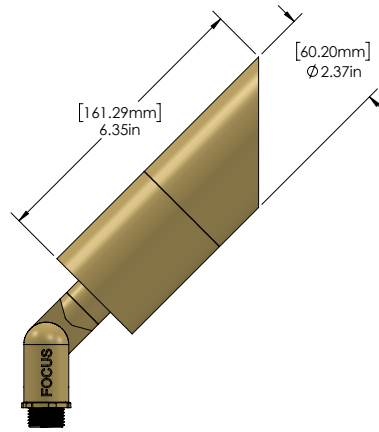

RXD08-TAC

Dimensions Shown in Brass

ETAC

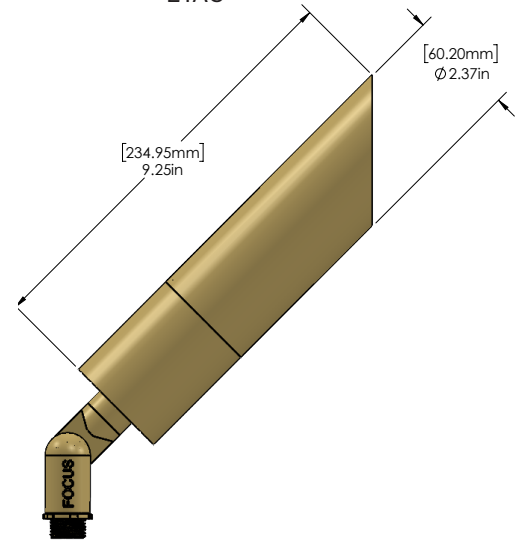

RXD08-ETAC

SPECIFICATIONS


INTERNALS	VOLTAGE	12 Volt / 120 Volt
	WIRING	12 Volt: Standard black 3ft 18/2 zip cord from base of fixture. 120 Volt: Standard 18g, black, white, green (ground)
	O-RING	Red silicone, 70 durometer, 1.7" ID, 2mm th
	GROMMET	SBR rubber, .375"HD x .0625"MT x .15625"ID x .50"FD x .21875"OH, black
EXTERNALS	BODY	Extrusion 27200 round tube, 2.25" OD x 4.25"
	CAP(S)	Extrusion 27200 round tube (Flat Cap: 2.37" OD x 1.50"), (TAC: 2.37" OD x 3.60"), (ETAC: 2.37" OD x 6.50")
	LENS	Glass lens, clear tempered, 54.50mm/2.150" OD x 3.00mm/0.125" ±.03
	SWIVEL	Machined brass top and bottom swivel, screw, lock nut, .50"NPS
	MOUNT	FA03 ABS black stake, .50" NPS tapped. Low voltage only. (More options available. See page 3.)
	FINISH	Brass: Unfinished (Standard) See page 5 for more powder coat and acid treatment options.
    Click Icon to Download	LISTINGS	ETL. IP65. CE IES files available for download.



FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED
MANUFACTURED
IN THE USA





RXD08 DIRECTIONAL LIGHT SPEC SHEET

RXD08

PROJECT:

TYPE:

DATE:

CATALOG NUMBER:

ACCESSORIES

(Configure and order accessories separately)

Stakes



FA03
8.75"
(12v)




FA03LG
8.875"
(12v)



FA03RX
7.00"
(12v)



FA032P
8.235"
(12v)



FA033P
8.235"
(12v)


Mounting Posts




FA01
15.00"
(12v)



FA24MDCSTPOST
13.00" to 16.00"
(12v)



FA25
20.00"
(12v)



FA26
20.00"
(120-277v)

Extension Wands & Couplers



FA30-4
4.00"



FA30-8
8.00"



FA30
10.00"



FA31
13.00"



FA32
16.00"



FA33
21.00"



FA34
26.00"

(12-277v)

Canopies & Adapters



FA24/BRS
3.00" dia.
(12v)



FA24MDCST/BRS
2.65" dia.
(12v)



FA24MDCSTPC/BRS
2.65" dia.
(12v)



FA24MD
(12v)



FA24LGSPUN/BRS
4.75" dia.
(12v)



FA24LGCST/BRS
4.75" dia.
(12-277v)



FA24LGDHBS
(12-277v)



FA23CST
(12-277v)



FATAD
(12-277v)




FA22LGCST/BRS
5.75"
(12-277v)

Tree Mounts




FA22TREE
(12-277v)




FA24MDCSTTREE
(12v)




FA24T
(12v)



C/FA111TPS
(12-277v)



C/FA111T
(120-277v)



C/FA111
(12-277v)

Lenses



FA11RXD02RED
(Red Color Glass Lens)



FA11RXD02AMBER
(Amber Color Glass Lens)



FA11RXD02GREEN
(Green Color Glass Lens)



FA11RXD02BLUE
(Blue Color Glass Lens)



FA104SB
(Sand Blasted Lens)



FA9836C16
(Linear Spread Lens)



FA0821
(Hex Cell Louver)



FA99
(Clear Convex Lens)

Direct Burials & JBoxes



DBR55JB
(12-277v)



FA-JBOX
(12-277v)



IP65



landscape • architectural • hospitality • entertainment • illumination

FOCUS INDUSTRIES INC.

25301 COMMERCENTRE DRIVE


LAKE FOREST, CA. 92630

949.830.1350 | TOLL FREE: 888.882.1350

WWW.FOCUSINDUSTRIES.COM

DESIGNED
MANUFACTURED
IN THE USA





RXD08 DIRECTIONAL LIGHT SPEC SHEET

RXD08


PROJECT:

TYPE:

DATE:

CATALOG NUMBER:

APPLICATIONS EXAMPLES

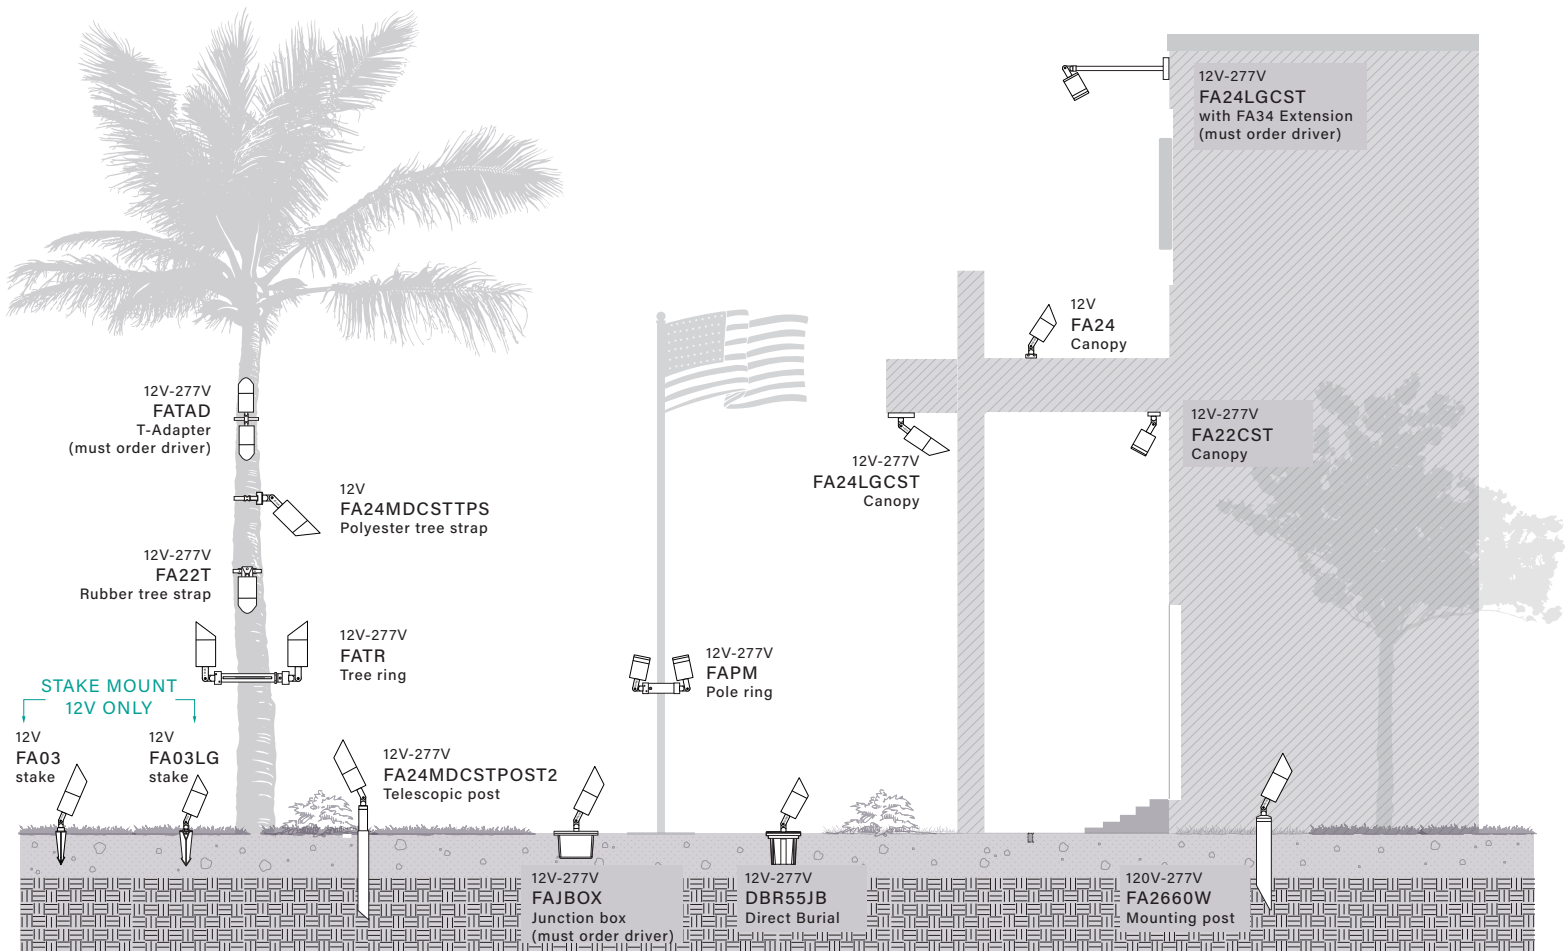

Images enhanced to illustrate usage of mounting options. Drawings not to scale. (See page 2 for product dimensions)
(Use like material of fixture with material of mounting device for better compatibility)




IP65



FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED
MANUFACTURED
IN THE USA





RXD08 DIRECTIONAL LIGHT SPEC SHEET

RXD08

PROJECT:

TYPE:

DATE:

CATALOG NUMBER:

LED DATA

12v MR16 DATA


L#	CCT	CRI	WATTS	LUMENS	RATED HOURS
L22	3000K	80	3	270	40,000
L24	3000K	80	3	270	40,000
L26	3000K	80	3	270	40,000
L34	3000K	80	5	450	40,000
L36	3000K	80	5	450	40,000
L38	3000K	80	5	450	40,000
L40	Amber	~	5	(585-595nm)	40,000
L46	3000K	80	7	550	40,000
L48	3000K	80	7	550	40,000
L50	3000K	80	7	550	40,000

120v MR16 DATA

L#	CCT	CRI	WATTS	LUMENS	RATED HOURS
L106	3000K	80	3	270	40,000
L108	3000K	80	3	270	40,000
L110	3000K	80	3	270	40,000
L114	3000K	80	5	450	40,000
L116	3000K	80	5	450	40,000
L118	3000K	80	5	450	40,000
L119	Amber	~	5	(585-595nm)	40,000
L124	3000K	80	7	550	40,000
L126	3000K	80	7	550	40,000
L128	3000K	80	7	550	40,000

FINISHES


STANDARD FINISHES

Black Texture
(-BLT)Bronze Texture
(-BRT)

PREMIUM FINISHES

Dark Bronze
(-DBZ)Black Magic
(-BKM)White Gloss
(-WHT)White Texture
(-WTX)Stucco
(-STU)Chrome Powder
(-CPR)Luna
(-LUN)Rubbed Verde
(-RBV)Hunter Texture
(-HTX)Weathered Iron
(-WIR)Weathered Brown
(-WBR)Rust
(-RST)

ACID FINISHES Brass and Copper fixtures only

Acid Rust
Brass (-BAR)
Copper (-CAR)Black Acid Treatment
Brass (-BAT)
Copper (-BAT)Acid Verde
Brass (-BAV)
Copper (-CAV)

CUSTOM FINISHES

RAL #:

Need help finding a RAL color?

<https://www.ralcolor.com/>

PANTONE #:

Supply RAL or Pantone here

Need help finding a Pantone color?

<https://www.pantone.com/color-finder>

FOCUS INDUSTRIES INC.

25301 COMMERCENTRE DRIVE

LAKE FOREST, CA. 92630

949.830.1350 | TOLL FREE: 888.882.1350

WWW.FOCUSINDUSTRIES.COM

DESIGNED
MANUFACTURED
IN THE USA