

CATALOG NUMBER:







CATALOG ORDER LOGIC	IC	LO	ER	RD	0	G	LO	ATA	CA
---------------------	----	----	----	----	---	---	----	-----	----

FIXTURE

EXAMPLE:

BQFD01L48SS

BQ Barbecue Light

MOUNTING

☐ FD Flex Deck (For 12 Volt and 120 Volt) Top Mount (For 12 Volt and 120 Volt)

TM FC5 Focus Clamp 5 inch (For 12 Volt and 120 Volt)

Quick Connect (For 12 Volt)

TYPE

Threaded Egg 01

12 VOLT LED **SOCKET**

GU5.3 Bi-Pin

3000K

☐ L48

550lm

120 VOLT LED ___ L134

7w

SOCKET E26 Medium Base KELVIN 3000K

LUMEN 550lm

FINISH (standard finishes listed) 316 Brushed Stainless Steel

POWER SUPPLIES

BQFA03 Kit 2: FA05 quick connector and 20' 18/2 wire to existing voltage systems

BQFA04 Kit 3: 9ft power cord

SHIP WEIGHT

Stainless Steel 316 (2.0lbs)

ADDITIONAL INFORMATION

120 volt option uses 7w PAR16 medium base LED

















PROJECT: TYPE: DATE:


CATALOG NUMBER:

DIMENSIONS

Dimensions Shown with Deck Mount (12-120V)



Dimensions Shown with FC3/FC5 (12-120V)



Dimensions Shown with QC (12-120V)

Quick Connect

16.0in
[406.00mm]

2.29in
[58.166mm]

	:ATI	

SPECIFICA	TIONS	
INTERNALS	VOLTAGE	12V-120v
	WIRING	12v: Black 4 foot 18/2 zip cord from base of fixture. For 25 foot 16/2 fixture lead wire add -25F to catalog number 120V: 18G Black, White, and Green (Ground) with M4 ring terminal UL 1007-16"
	O-RING	2x - 70 Durometer 400° red silicone, 1.7" ID, 1.75mm th
	NIPPLE	.50" zinc platted steel .25" IPS (A50)
	CONNECTOR	Close ended cimp cap nylon, 22-14 AWG, clear
	HARDWARE	Plastic bushing .25" IPS pipe hole Brass hex nut .125" IPS x .50" dia. x .09375" th
		Hickey .75" H, with 2 holes threaded .25" IPS-316 Stainless Steel
		Spring wire dia0540 L 2.700 outside dia. 1.3650
EXTERNALS	HOUSING	316 Brushed Stainless Steel body, .125" IPS hole, machine finish
	CAP	316 Brushed Stainless, machine finish
	MATERIALS	316 Stainless Steel
	STEM	16.00" Stainless Steel flex arm, 12.00" Stainless Steel Rod, CLR
	MOUNT	12 volt - 120 volt: Deck mount, Top mount, 5" Clamp, 12 volt Only: Quick Connect
	LENS	Glass lens, clear tempered, 2.18" OD x .125", ± .03"
	SWITCH	Black boot, J961. On/Off switch 12v/120v, 3A 250VAC/6A 125VAC/2A 125VL/6A 14 VT
	FINISH	316 Stainless Steel
	LISTINGS	IP66. ETL rated for Indoor / Outdoor use. Suitable for wet locations







FOCUS INDUSTRIES Inc.

25301 COMMERCENTRE DRIVE LAKE FOREST, CA. 92630 949.830.1350 | TOLL FREE: 888.882.1350 WWW.FOCUSINDUSTRIES.COM





TYPE


DATE:


CATALOG NUMBER:


ACCESSORIES









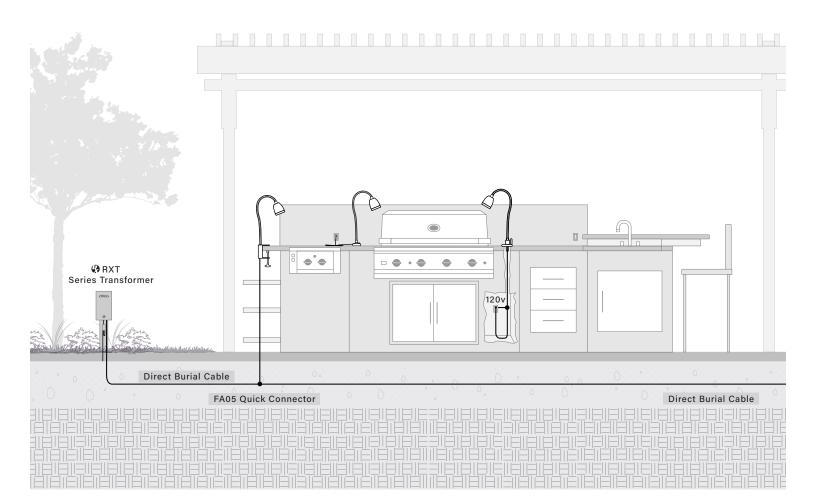








FOCUS INDUSTRIES Inc.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM





ROJECT: TYPE: DATI

CATALOG NUMBER:

LED DATA



12v MR16 LED DATA

L#	ССТ	CRI	WATTS	LUMENS	RATED HOURS
L48	3000K	83	7	550	50,000

120v PAR16 LED DATA

L#	ССТ	CRI	WATTS	LUMENS	RATED HOURS
L134	3000K	83	3	550	40,000







FOCUS INDUSTRIES Inc.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

