

RXP04 PATH LIGHT SPEC SHEET

RXP04

PROJECT: _____ TYPE: _____ DATE: _____

CATALOG NUMBER: _____



CATALOG ORDER LOGIC

EXAMPLE: RXP04L24BRS

FIXTURE

RXP Remedy Series Double Path Light

TYPE

04

CAP OPTIONS

TAC Threaded Angle Cap

12 VOLT LED

	WATT	SOCKET	DEGREE	KELVIN	LUMEN
<input type="checkbox"/> NL (No Lamp)					
<input type="checkbox"/> NLBP (No Lamp)		GU5.3 Bi-Pin			
<input type="checkbox"/> L22	3w	GU5.3 Bi-Pin	15°	3000K	270lm
<input type="checkbox"/> L24	3w	GU5.3 Bi-Pin	36°	3000K	270lm
<input type="checkbox"/> L26	3w	GU5.3 Bi-Pin	80°	3000K	270lm
<input type="checkbox"/> L34	5w	GU5.3 Bi-Pin	15°	3000K	450lm
<input type="checkbox"/> L36	5w	GU5.3 Bi-Pin	36°	3000K	450lm
<input type="checkbox"/> L38	5w	GU5.3 Bi-Pin	80°	3000K	450lm
<input type="checkbox"/> L40	5w	GU5.3 Bi-Pin	36°	Amber	585-595nm
<input type="checkbox"/> L46	7w	GU5.3 Bi-Pin	15°	3000K	550lm
<input type="checkbox"/> L48	7w	GU5.3 Bi-Pin	36°	3000K	550lm
<input type="checkbox"/> L50	7w	GU5.3 Bi-Pin	80°	3000K	550lm

120 VOLT LED

	WATT	SOCKET	DEGREE	KELVIN	LUMEN
<input type="checkbox"/> NL (No Lamp)					
<input type="checkbox"/> NL120V		GU10			
<input type="checkbox"/> L106	3w	GU10	15°	3000K	270lm
<input type="checkbox"/> L108	3w	GU10	36°	3000K	270lm
<input type="checkbox"/> L110	3w	GU10	80°	3000K	270lm
<input type="checkbox"/> L114	5w	GU10	15°	3000K	450lm
<input type="checkbox"/> L116	5w	GU10	36°	3000K	450lm
<input type="checkbox"/> L118	5w	GU10	80°	3000K	450lm
<input type="checkbox"/> L119	5w	GU10	36°	Amber	585-595nm
<input type="checkbox"/> L124	7w	GU10	15°	3000K	550lm
<input type="checkbox"/> L126	7w	GU10	36°	3000K	550lm
<input type="checkbox"/> L128	7w	GU10	80°	3000K	550lm

OPTIONS

25F 25 Foot Fixture Lead Wire

CUSTOM STEM LENGTH

25.00" 25.00" Standard Stem Length

Custom Length _____(S)
(State Custom Length On the Line Above)

FINISH (standard finishes listed)

BRS (Unfinished- Brass)
Premium and Acid Finishes (See page 5 for more color options)
Pantone & RAL Colors (Enter RAL or Pantone number at end of part number)

SHIP WEIGHT

Brass C27200 (3.0lbs)

ADDITIONAL INFORMATION

- LED's are dimmable with Triac dimming



IP65




landscape • architectural • hospitality • entertainment • illumination

FOCUS INDUSTRIES INC.
 25301 COMMERCENTRE DRIVE
 LAKE FOREST, CA. 92630
 949.830.1350 | TOLL FREE: 888.882.1350
 WWW.FOCUSINDUSTRIES.COM

DESIGNED
MANUFACTURED
IN THE USA





RXP04 PATH LIGHT SPEC SHEET

RXP04

PROJECT:

TYPE:

DATE:


CATALOG NUMBER:

Dimensions Shown with Flat Cap




FA03LG ABS Stake

Dimensions Shown with Threaded Angle Cap

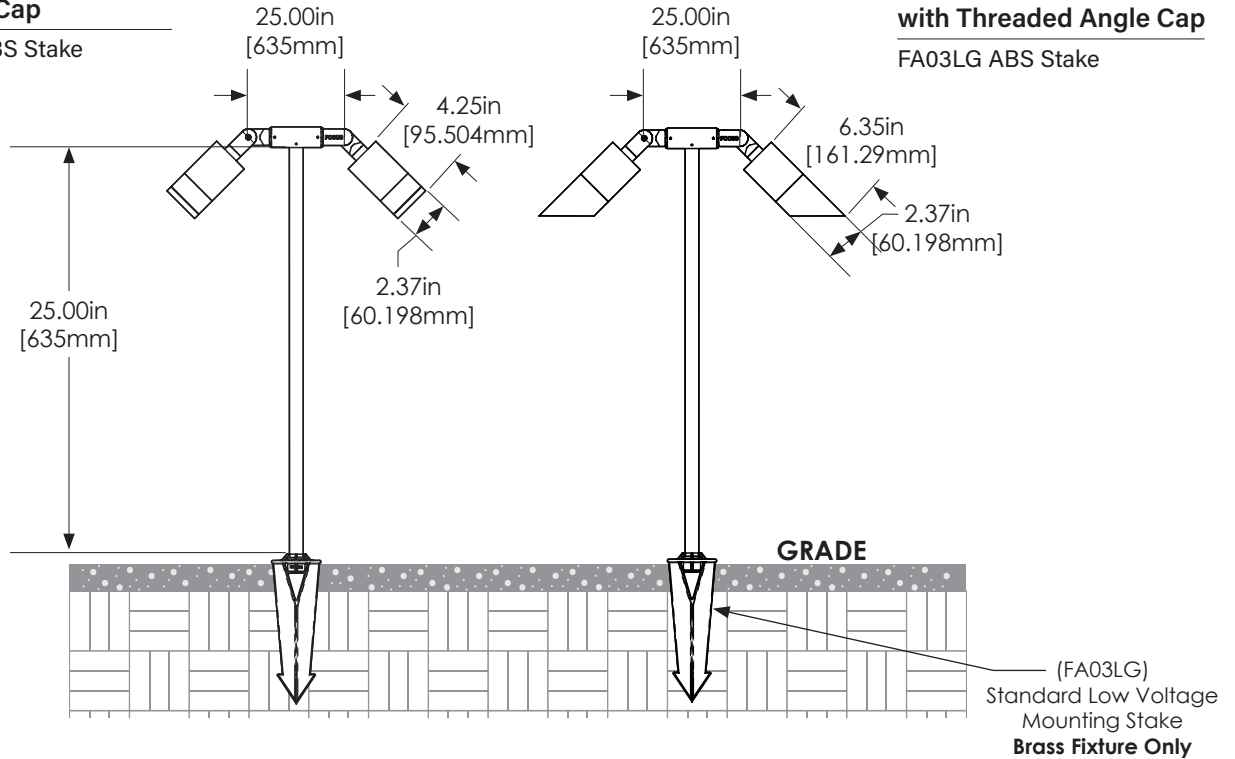FA03LG ABS Stake




SPECIFICATIONS

INTERNALS	VOLTAGE	12 Volt / 120 Volt (277 Volt available. Consult factory for more information)
	WIRING	12 Volt: Standard black 3ft 18/2 zip cord from base of fixture. 120 Volt: Standard 18g, black, white, green (ground)
	O-RING	Red silicone, 70 durometer, 1.7" ID, 2mm th
	GROMMET	SBR rubber, .375"HD x .0625"MT x .15625"ID x .50"FD x .21875"OH, black
   Click Icon to Download	EXTERNALS	
	BODY	Extrusion 27200 round tube, 2.25" OD x 4.25"
	CAP(S)	Extrusion 27200 round tube (Flat Cap: 2.37" OD x 1.50"), (TAC: 2.37" OD x 3.60"), (ETAC: 2.37" OD x 6.50")
	LENS	Glass lens, clear tempered, 54.50mm/2.150" OD x 3.00mm/0.125" ±.03
	SWIVEL	Machined brass top and bottom swivel, screw, lock nut, .50"NPS
	T-ADPATER	x3 .50" NPS for 2 fixtures and stem
	STEM	25.00" brass tubing, threaded both ends. .50" NPS
	MOUNT	FA03LG ABS black stake, .50" NPS tapped. Low voltage only. (More options available. See page 3.)
FINISH	Brass: Unfinished (Standard) See page 5 for more powder coat and acid treatment options.	
LISTINGS	ETL, IP65, CE IES files available for download.	



FOCUS INDUSTRIES INC.
 25301 COMMERCENTRE DRIVE
 LAKE FOREST, CA. 92630
 949.830.1350 | TOLL FREE: 888.882.1350
 WWW.FOCUSINDUSTRIES.COM





RXP04 PATH LIGHT SPEC SHEET

RXP04

PROJECT:

TYPE:

DATE:

CATALOG NUMBER:



Stakes

FA03 8.75" (12v)	FA03LG 8.875" (12v)	FA03RX 7.00" (12v)	FA032P 8.235" (12v)	FA033P 8.235" (12v)
-------------------------------	----------------------------------	---------------------------------	----------------------------------	----------------------------------

Mounting Posts

FA01 15.00" (12v)	FA24MDCSTPOST 13.00" to 16.00" (12v)	FA25 20.00" (12v)	FA26 20.00" (120-277v)
--------------------------------	---	--------------------------------	-------------------------------------

Canopies & Adapters

FA24/BRS 3.00" dia. (12v)	FA24MDCST/BRS 2.65" dia. (12v)	FA24MDCSTPC/BRS 2.65" dia. (12v)	FA24MD (12v)	FA24LGSPUN/BRS 4.75" dia. (12v)	FA24LGCST/BRS 4.75" dia. (12-277v)
FA22LGCST/BRS 5.75" (12-277v)					

Lenses

Glass lenses available in:
Red, Green, Amber, Light Blue, Dark Blue

FA11DL42 (Color Glass Lens)	FA104DL42SB (Sand Blasted Lens)	FA08DL42 (Hex Cell Louver)
---------------------------------------	---	--------------------------------------

Direct Burials & JBoxes

DBR55JB (12-277v)	FA-JBOX (12-277v)
-----------------------------	-----------------------------



IP65




landscape • architectural • hospitality • entertainment • illumination

FOCUS INDUSTRIES INC.
 25301 COMMERCENTRE DRIVE
 LAKE FOREST, CA. 92630
 949.830.1350 | TOLL FREE: 888.882.1350
 WWW.FOCUSINDUSTRIES.COM

DESIGNED
MANUFACTURED
IN THE USA





RXP04 PATH LIGHT SPEC SHEET


RXP04

PROJECT:

TYPE:

DATE:

CATALOG NUMBER:

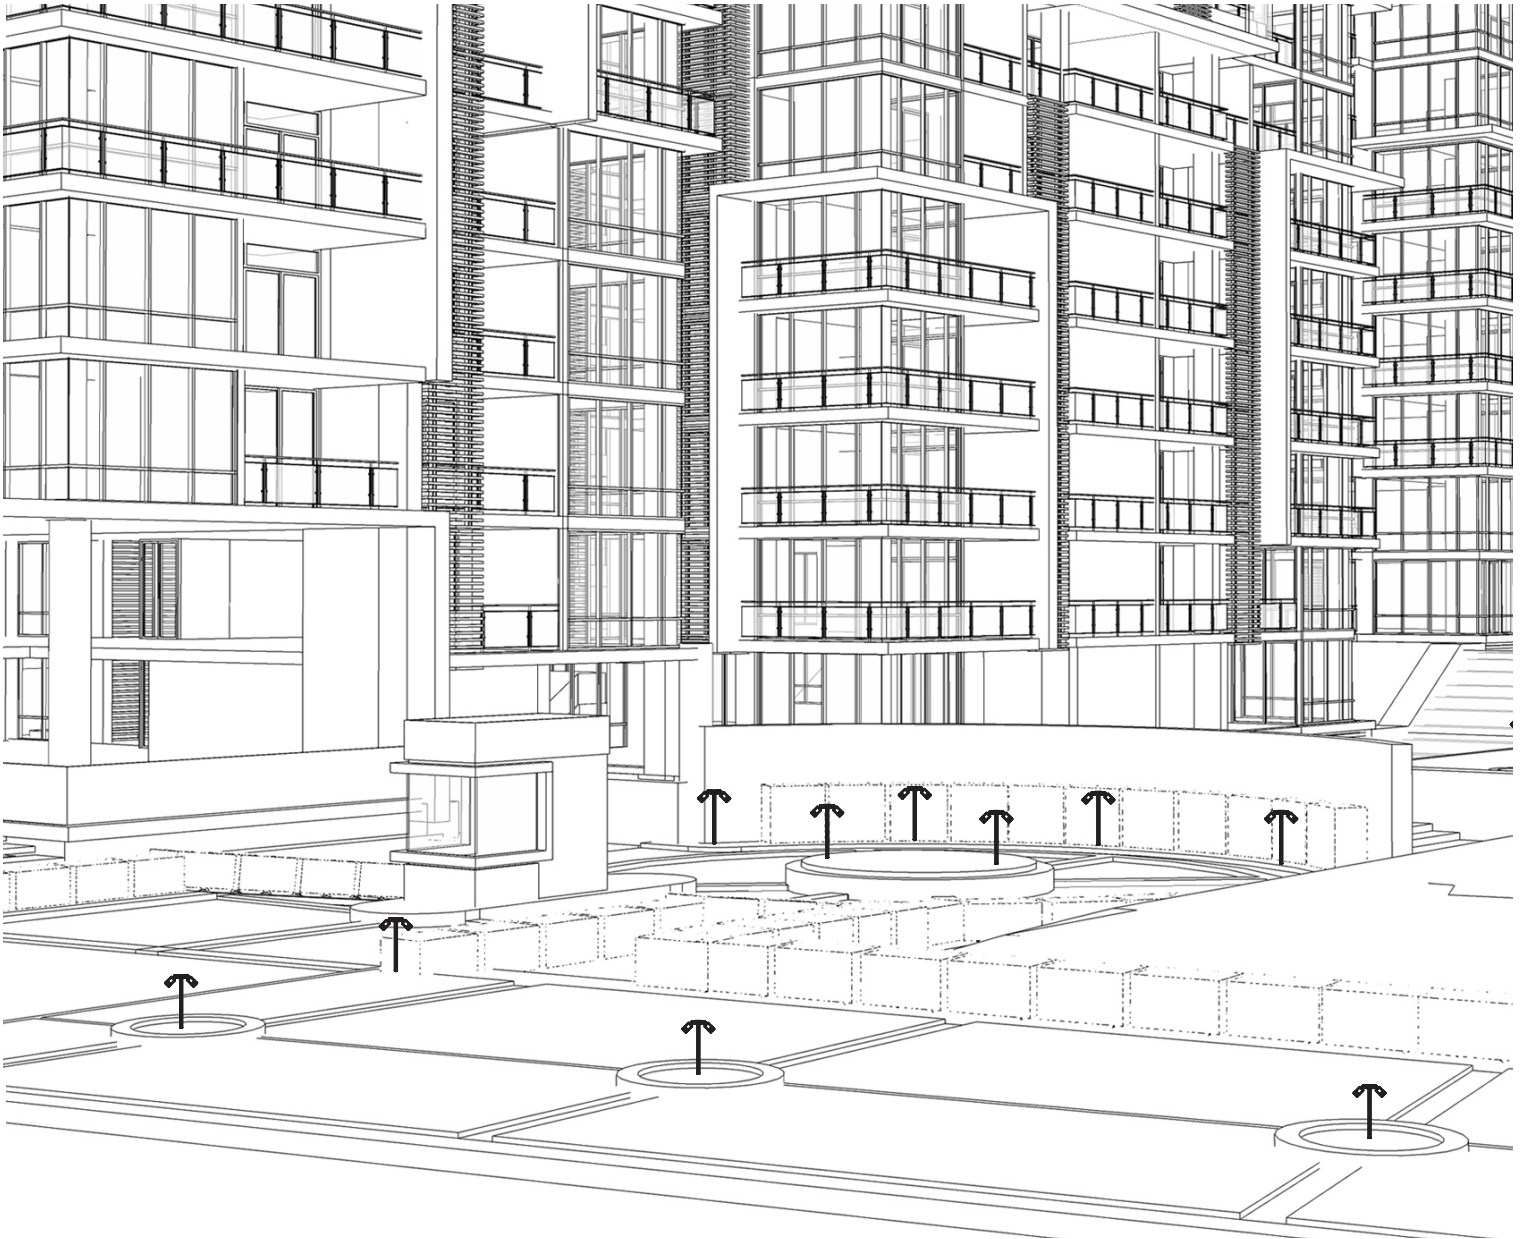


landscape • architectural • hospitality • entertainment • illumination

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED
MANUFACTURED
IN THE USA





RXP04 PATH LIGHT SPEC SHEET

RXP04

PROJECT: _____ TYPE: _____ DATE: _____

CATALOG NUMBER: _____

LED DATA

12v MR16 DATA

L#	CCT	CRI	WATTS	LUMENS	RATED HOURS
L22	3000K	80	3	270	40,000
L24	3000K	80	3	270	40,000
L26	3000K	80	3	270	40,000
L34	3000K	80	5	450	40,000
L36	3000K	80	5	450	40,000
L38	3000K	80	5	450	40,000
L40	Amber	~	5	(585-595nm)	40,000
L46	3000K	80	7	550	40,000
L48	3000K	80	7	550	40,000
L50	3000K	80	7	550	40,000

120v MR16 DATA

L#	CCT	CRI	WATTS	LUMENS	RATED HOURS
L106	3000K	80	3	270	40,000
L108	3000K	80	3	270	40,000
L110	3000K	80	3	270	40,000
L114	3000K	80	5	450	40,000
L116	3000K	80	5	450	40,000
L118	3000K	80	5	450	40,000
L119	Amber	~	5	(585-595nm)	40,000
L124	3000K	80	7	550	40,000
L126	3000K	80	7	550	40,000
L128	3000K	80	7	550	40,000



FINISHES

STANDARD FINISHES



Black Texture (-BLT)

Bronze Texture (-BRT)

PREMIUM FINISHES



Dark Bronze (-DBZ)

Black Magic (-BKM)

White Gloss (-WHT)

White Texture (-WTX)

Stucco (-STU)

Chrome Powder (-CPR)



Luna (-LUN)



Rubbed Verde (-RBV)



Hunter Texture (-HTX)



Weathered Iron (-WIR)



Weathered Brown (-WBR)



Rust (-RST)

ACID FINISHES Brass and Copper fixtures only



Acid Rust Brass (-BAR)
Copper (-CAR)

Black Acid Treatment Brass (-BAT)
Copper (-BAT)

Acid Verde Brass (-BAV)
Copper (-CAV)

CUSTOM FINISHES

RAL #: _____
Need help finding a RAL color?
<https://www.ralcolor.com/>

PANTONE #: _____ Supply RAL or Pantone here
Need help finding a Pantone color?
<https://www.pantone.com/color-finder>



IP65



landscape • architectural • hospitality • entertainment • illumination

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED
MANUFACTURED
IN THE USA

