

DL03

PROJECT:

CATALOG NUMBER:







CATALOG ORDER LOGIC

EXAMPLE: DL03NLBRSBLT

FIXTURE

DL Directional Light

TYPE

03

DOWN LIGHT OPTION

☐ D Down Light Option

12 VOLT LED WATT SOCKET BEAM ANGLE KELVIN LUMEN

TYPE:

 □ NL
 No Lamp

 □ L84
 10w
 Stud Terminal
 15°
 3000K
 400lm

 □ L88
 10w
 Stud Terminal
 36°
 3000K
 400lm

DRIVER

12v Integrated on board driver, (No external driver required)
12v AC/DC input, Voltage Range 9v-18v Operating range: 12v-15v

☐ 120v input, (External universal driver—HW1260LED) Triac Dimmable Driver (Must use UL listed outdoor junction box, see page 4)

☐ 277v input, (External universal driver—HW1260277LEDR1) (Must use UL listed outdoor junction box, see page 4)

OPTIONS

☐ NS No Stake

☐ 25F 25 Foot Fixture Lead Wire

MATERIAL (standard material listed

☐ BRS (Unfinished-Brass)

Premium and Acid Finishes (See page 5 for more color options)
Pantone & RAL Colors (Enter RAL or Pantone number at end of part number)

MOUNTING

12v - FA03LG Large black 9" ABS stake, tapped 1/2" NPS (Included with Brass) 120-277v - Mounting options not supplied. FA26 post or other Focus JBoxes can be used.

[Configure and order accessories separately see page 4]

ADDITIONAL INFORMATION

· LED's are dimmable with Triac dimming



DL03 Directional Flood











DATE:

TYPE:

DL03


PROJECT:

CATALOG NUMBER:


BASIC DIMENSIONS


Dimensions Shown


Brass Version with FA03LG Stake

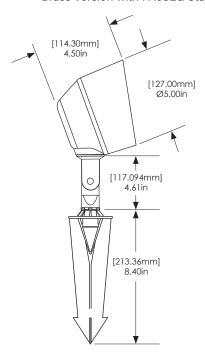


MOUNTING OPTION DIMENSIONS









FA03 Stake

FA26 Post

FAJBOX

FA24LGCST














DL03

DATE:

PROJECT: TYPE:

CATALOG NUMBER:

SPECIFICATIONS

INTERNALS VOLTAGE 12 Volt / 120v

LED 10w PAR36 Super Saver LED (15°/36°) or No Lamp (NL)

WIRING 12v standard: Black 18/2 zip cord from fixture

120v standard: Black, white, green (ground) with M4 ring terminal UL 1007-16"

O-RING Red silicone 568-037 70 durometer

CONNECTION FA05 quick connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

EXTERNALS

BODY Cast brass, 4.50" x 5.00" dia.

SWIVEL Cast brass with lock nut washer, 1/2" threaded male

MOUNT 12v: FA03LG large black ABS 9" stake (Brass)

120v-277v: Mounting options not supplies. Order separately. See page 4 for more options.

FINISH Brass Only standard: Unfinished (See page 5 for more powder coat or acid treatment options)

LISTINGS IP66. Rated for indoor and outdoor use. Suitable for wet locations. ETL.























DL03


PROJECT: TYPE: DATE:


CATALOG NUMBER:


ACCESSORIES


(Configure and order accessories separately)








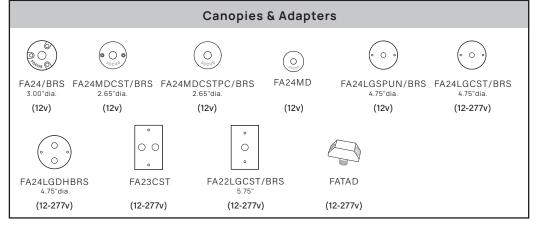


















DL03

DATE:

TYPE:

PROJECT:

CATALOG NUMBER:

FINISHES

STANDARD FINISHES







CUSTOM FINISHES Supply RAL or Pantone here

RAL #:

Need help finding a RAL color? https://www.ralcolor.com/

PANTONE #:

Need help finding a Pantone color? https://www.pantone.com/color-finder

PREMIUM FINISHES











Chrome Powder (-CPR)



(-WIR)



(-WBR)




(-RST)

(-STU) **NEW**



(-RBV)







ACID FINISHES Brass and Copper fixtures only







Copper (-CAV) Brass (-BAV) Click Icon to Download











FOCUS INDUSTRIES INC. 25301 COMMERCENTRE DRIVE

LAKE FOREST, CA. 92630 949.830.1350 | TOLL FREE: 888.882.1350

WWW.FOCUSINDUSTRIES.COM



