

RXT TRANSFORMER

RXT

PROJECT:

TYPE:

DATE:

CATALOG NUMBER:



NEW
DEEPER CASE
with interchangeable
faceplate's



CATALOG ORDER LOGIC

EXAMPLE: RXT1260MV

TRANSFORMER TYPE

RXT Remedy Series Stainless Steel Transformer

SERIES

- | | |
|----------------------------------|--|
| <input type="checkbox"/> 1260MV | 60w Multi-volt Transformer, Timer Ready (Single Circuit) |
| <input type="checkbox"/> 12120MV | 120w Multi-volt Transformer, Timer Ready |
| <input type="checkbox"/> 12180MV | 180w Multi-volt Transformer, Timer Ready |
| <input type="checkbox"/> 12300MV | 300w Multi-volt Transformer, Timer Ready |
| <input type="checkbox"/> 12600MV | 600w Multi-volt Transformer, Timer Ready (Twin Circuit) |

PHOTO CELL OPTIONS

- | | |
|--------------------------------|------------------------|
| <input type="checkbox"/> Blank | Timer Ready (Standard) |
| <input type="checkbox"/> T | Mechanical Timer |
| <input type="checkbox"/> DT | Digital Timer |
| <input type="checkbox"/> AT | Astro Timer |

PHOTO CELL OPTIONS

- | | |
|------------------------------|------------------|
| <input type="checkbox"/> PC | Photocell |
| <input type="checkbox"/> RPC | Remote Photocell |

MATERIAL

SS 304Stainless Steel, Brushed Finish

ADDITIONAL INFORMATION

Timer ready receptacle for use with plug-in-timer (simply plug in for use).
Easy replacement of timer or control device
Manual operation.




UL1838 UL1598 CE NEMA3R UL IP68



FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED.
MANUFACTURED.
IN THE USA.





RXT TRANSFORMER

RXT

PROJECT:

TYPE:

DATE:


CATALOG NUMBER:

DIMENSIONS

Dimensions Shown

RXT 1260MV / RXT 12180 / RXT 12180

TIMER READY (STANDARD)

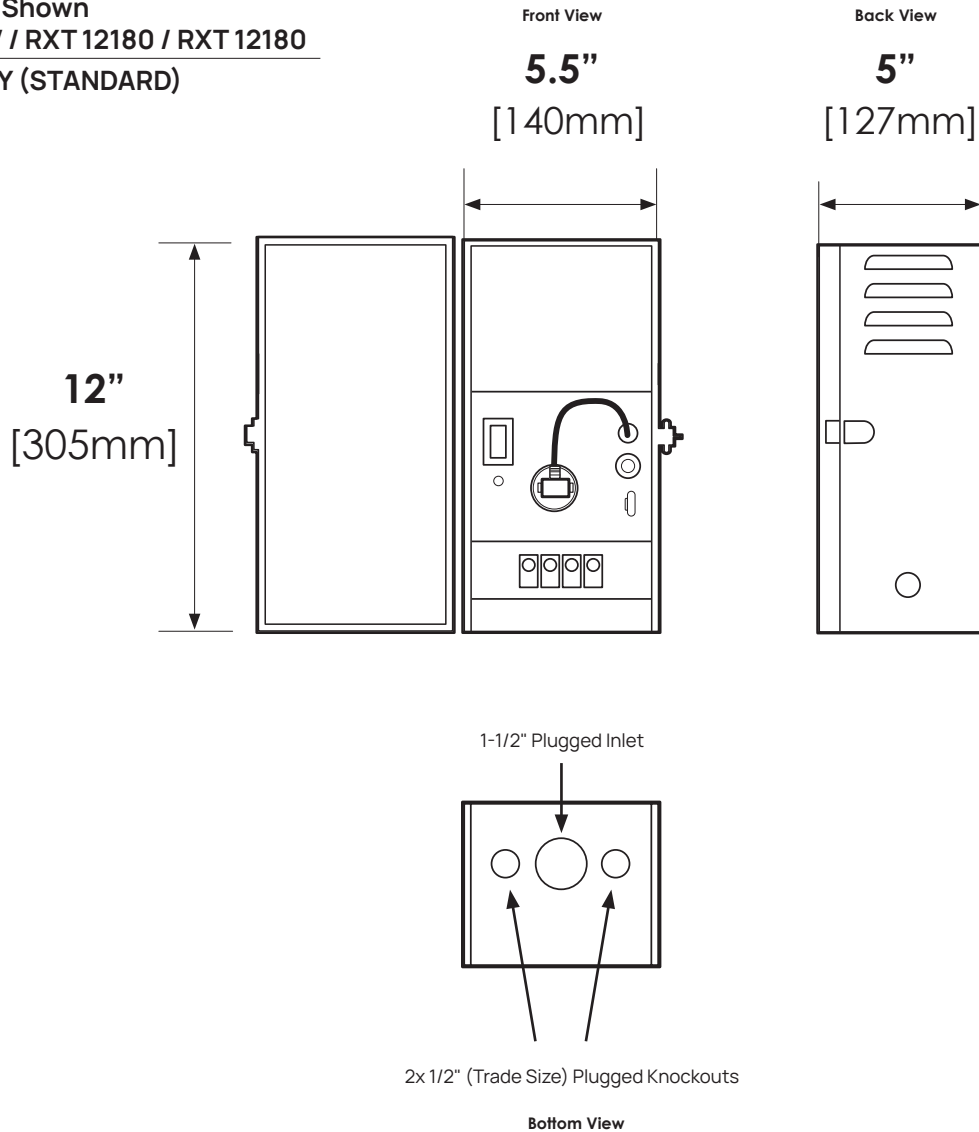


UL1838 UL1598 CE NEMA3R UL IP68



FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED.
MANUFACTURED.
IN THE USA.





RXT TRANSFORMER

RXT

PROJECT:


TYPE:

DATE:

CATALOG NUMBER:

DIMENSIONS

Dimensions Shown
RXT 12300MV / RXT 12600MV
TIMER READY (STANDARD)

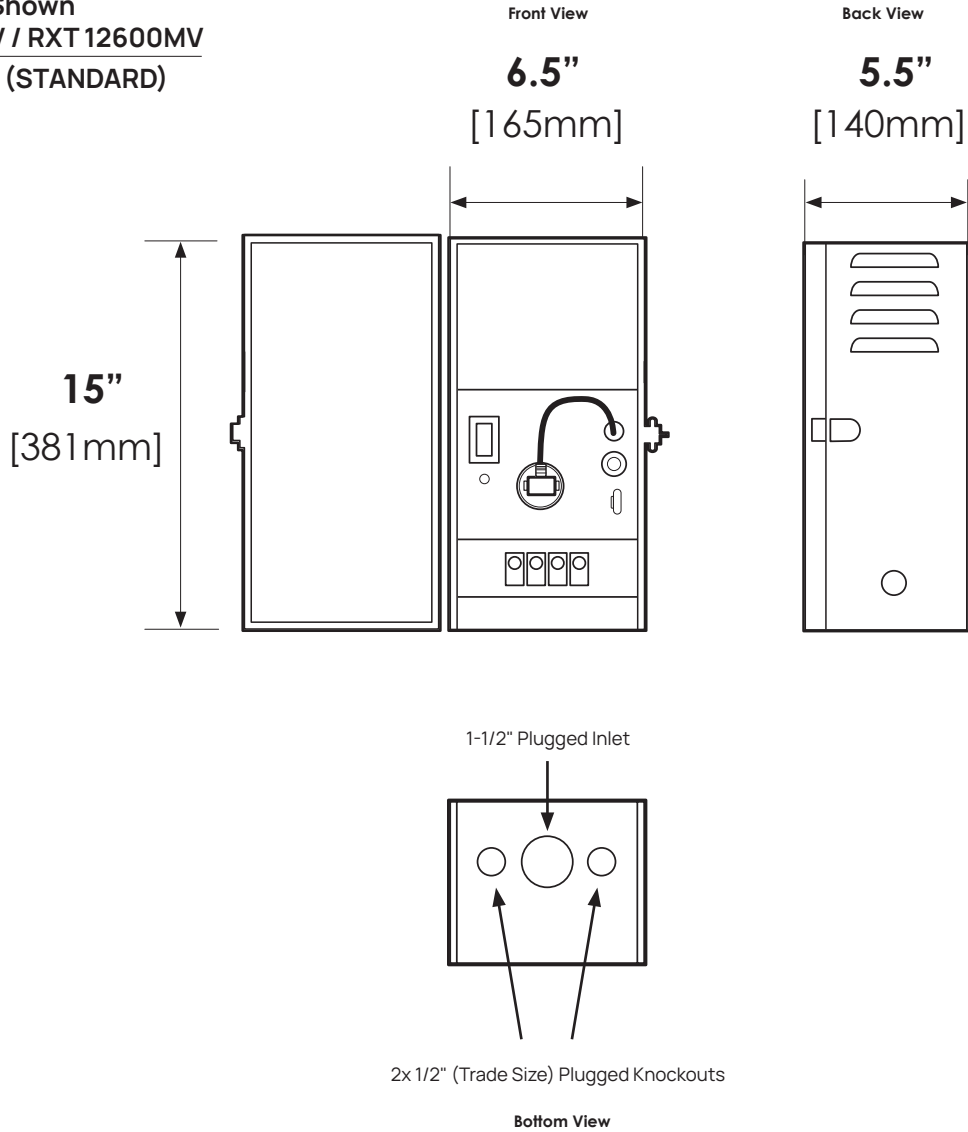



UL1838 UL1598 CE NEMA 3R UL IP68



FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED.
MANUFACTURED.
IN THE USA.





RXT TRANSFORMER

RXT

PROJECT:

TYPE:

DATE:

CATALOG NUMBER:

ACCESSORIES

Faceplates can be field installed


Face Plate for Timer Options



RXTFPT60 / T300 / T600
Mechanical Timer (-T)



RXTFPAT60 / AT300 / AT600
Astro Timer (-AT)



RXTFPDT60 / DT300 / DT600
Digital Timer (-DT)



PCRXTKIT
Photocell (-PC)



RPCRXTKIT
Remote Photocell (-RPC)

SPECIFICATIONS

MATERIALS/FEATURES

- UL1838 and UL1598 listed, the standard for low voltage landscape lighting systems
- 60, 120, 180, 300 and 600 watt output models available
- Multi Voltage output standard (12.5, 13.5 & 14.5 Volts)
- Super Terminal Lugs with capacity of 3 x #8, 5 x #10, 7 x #12 or 9 x #14 gauge wires
- 304 Stainless Steel enclosure (Lifetime Warranty)
- Removable hinged door is lockable and weather sealed
- Above grade, NEMA 3R rated, rain tight enclosure
- LED indicators for instant recognition of 120v and 12v power
- Timer Ready standard (for plug in timers)
- Optional Mechanical Timer (-T), Digital Timer (-DT) and Astro Timer (-AT) face plates can be factory or field installed
- Photocell Ready with quick connector (not on -AT models)
- Supplied with conduit knockouts and accessory knockouts conduit
- Bottom panel swings down for easy access wiring
- Mounting plate and hardware supplied for easy installation

ELECTRICAL

- Long life, high temperature (130°C) class 'B' rated transformer core
- Copper Shielded isolation/insulation type; No contact between 120v and 12v windings
- 1500v Isolation between all windings and ground
- Grade M19 electric grade steel for superior electrical and magnetic properties
- Single phase, open core and coil
- E.L. laminated winding and is protected by 180°C thermal switch.
- Double vacuumed impregnated with black slate flour
- Filled varnish for superior heat dissipation and noise reduction - Class 180°C
- 120v primary, 12.5v secondary 50/60 Hertz/cycle (standard)
- 6 foot 18/3 SJT-WA weatherproof grounded power cord with flat angle plug
- On/Off rocker switch
- Extra heavy duty (80 amps) terminal lugs
- Manually resettable circuit breakers on front panel for overload and short circuit protection

304 Stainless Steel enclosure with #4 Brushed finish



NEMA 3R

UL1598

UL1838

FINISH

UL1838

UL1598



NEMA 3R



IP68



FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED.
MANUFACTURED.
IN THE USA.

