


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.00V I:0.1570A P:1.884W PF:1.000 Freq:0Hz Lamp Flux:150.913x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:80*12mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 80.11 lm/W			
MODEL	FD-MD5050AW4C	I _{max} (cd)	61.41	S/MH(C0/180)	1.09
NOMINAL POWER(W)	2	LOR(%)	100.0	S/MH(C90/270)	1.13
RATED VOLTAGE(V)	12	TOTAL FLUX(lm)	150.91	η UP, DN(C0-180)	0.0,49.2
NOMINAL FLUX(lm)	150.913	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.7
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	12	η down(%)	99.9	CIBSE SHR MAX	1.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

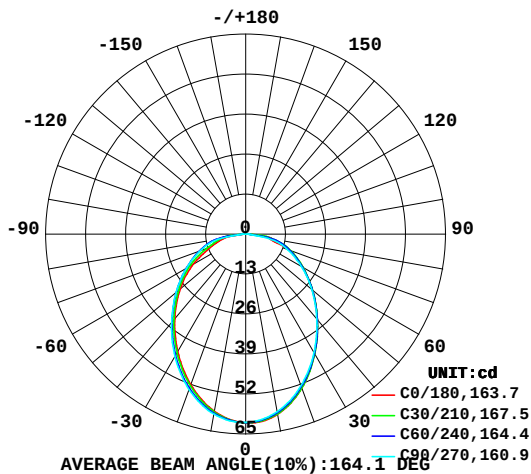

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

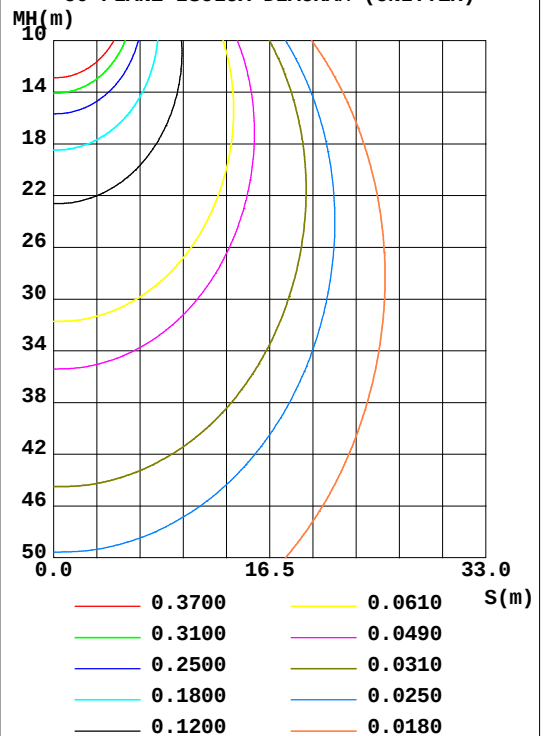

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Qin Meng
Test Date:2023-04-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:8.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	ϕ zone	ϕ total	%lum, lamp
10	59.52	59.19	58.71	58.17	58.52	58.95	59.45	59.52	0- 10	5.738	5.738	3.8, 3.8
20	53.34	53.10	52.57	51.76	52.15	53.00	53.83	53.72	10- 20	15.84	21.58	14.3, 14.3
30	44.85	44.89	44.49	43.80	44.20	45.12	45.99	45.67	20- 30	22.56	44.14	29.2, 29.2
40	36.28	36.30	36.01	35.56	35.89	36.84	37.52	37.23	30- 40	25.43	69.56	46.1, 46.1
50	28.37	28.39	28.07	27.85	27.82	28.98	29.55	29.39	40- 50	25.05	94.62	62.7, 62.7
60	21.38	21.42	20.84	20.75	19.71	21.77	22.31	22.45	50- 60	22.32	116.9	77.5, 77.5
70	15.01	15.33	14.30	13.74	11.75	14.67	15.67	16.26	60- 70	17.83	134.8	89.3, 89.3
80	8.270	8.675	5.787	7.523	6.726	8.839	7.934	9.895	70- 80	12.22	147.0	97.4, 97.4
90	0.1631	0.4940	0.6334	0.4204	0	0.5378	0.8237	0.6989	80- 90	3.781	150.8	99.9, 99.9
100	0	0	0	0	0	0	0	0	90-100	0.1325	150.9	100, 100
110	0	0	0	0	0	0	0	0	100-110	0	150.9	100, 100
120	0	0	0	0	0	0	0	0	110-120	0	150.9	100, 100
130	0	0	0	0	0	0	0	0	120-130	0	150.9	100, 100
140	0	0	0	0	0	0	0	0	130-140	0	150.9	100, 100
150	0	0	0	0	0	0	0	0	140-150	0	150.9	100, 100
160	0	0	0	0	0	0	0	0	150-160	0	150.9	100, 100
170	0	0	0	0	0	0	0	0	160-170	0	150.9	100, 100
180	0	0	0	0	0	0	0	0	170-180	0	150.9	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 82.305 lm

%lum = 54.5%

%lamp = 54.5%

Conical surface Flux(120deg): 116.94 lm

%lum = 77.5%


%lamp = 77.5%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:Qin Meng
 Test Date:2023-04-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:8.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES


Test:U:12.00V I:0.1570A P:1.884W PF:1.000 Freq:0Hz Lamp Flux:150.913x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:80*12mm	Shielding Angle:

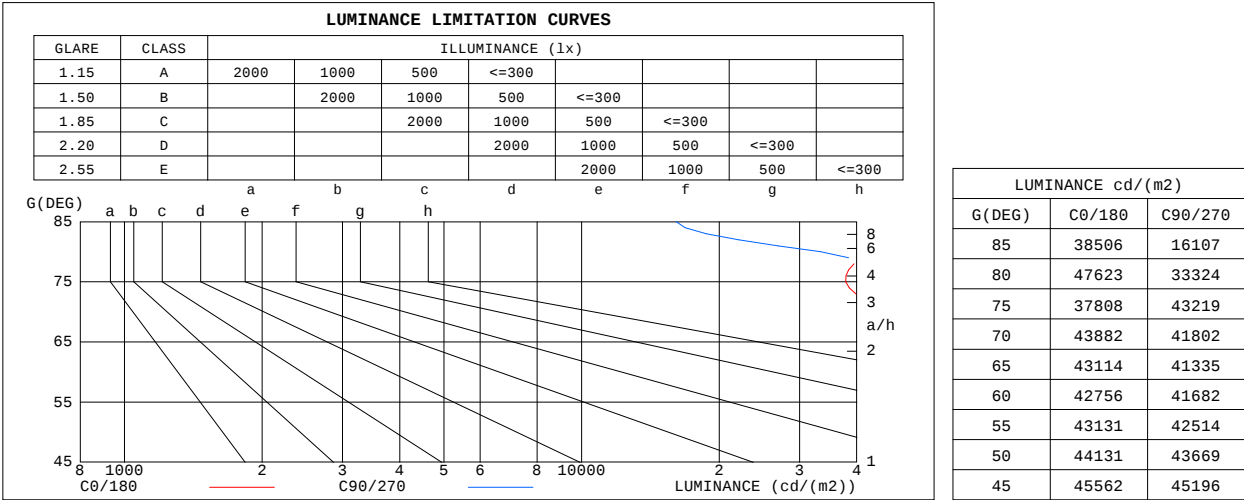

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Qin Meng
Test Date:2023-04-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:8.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

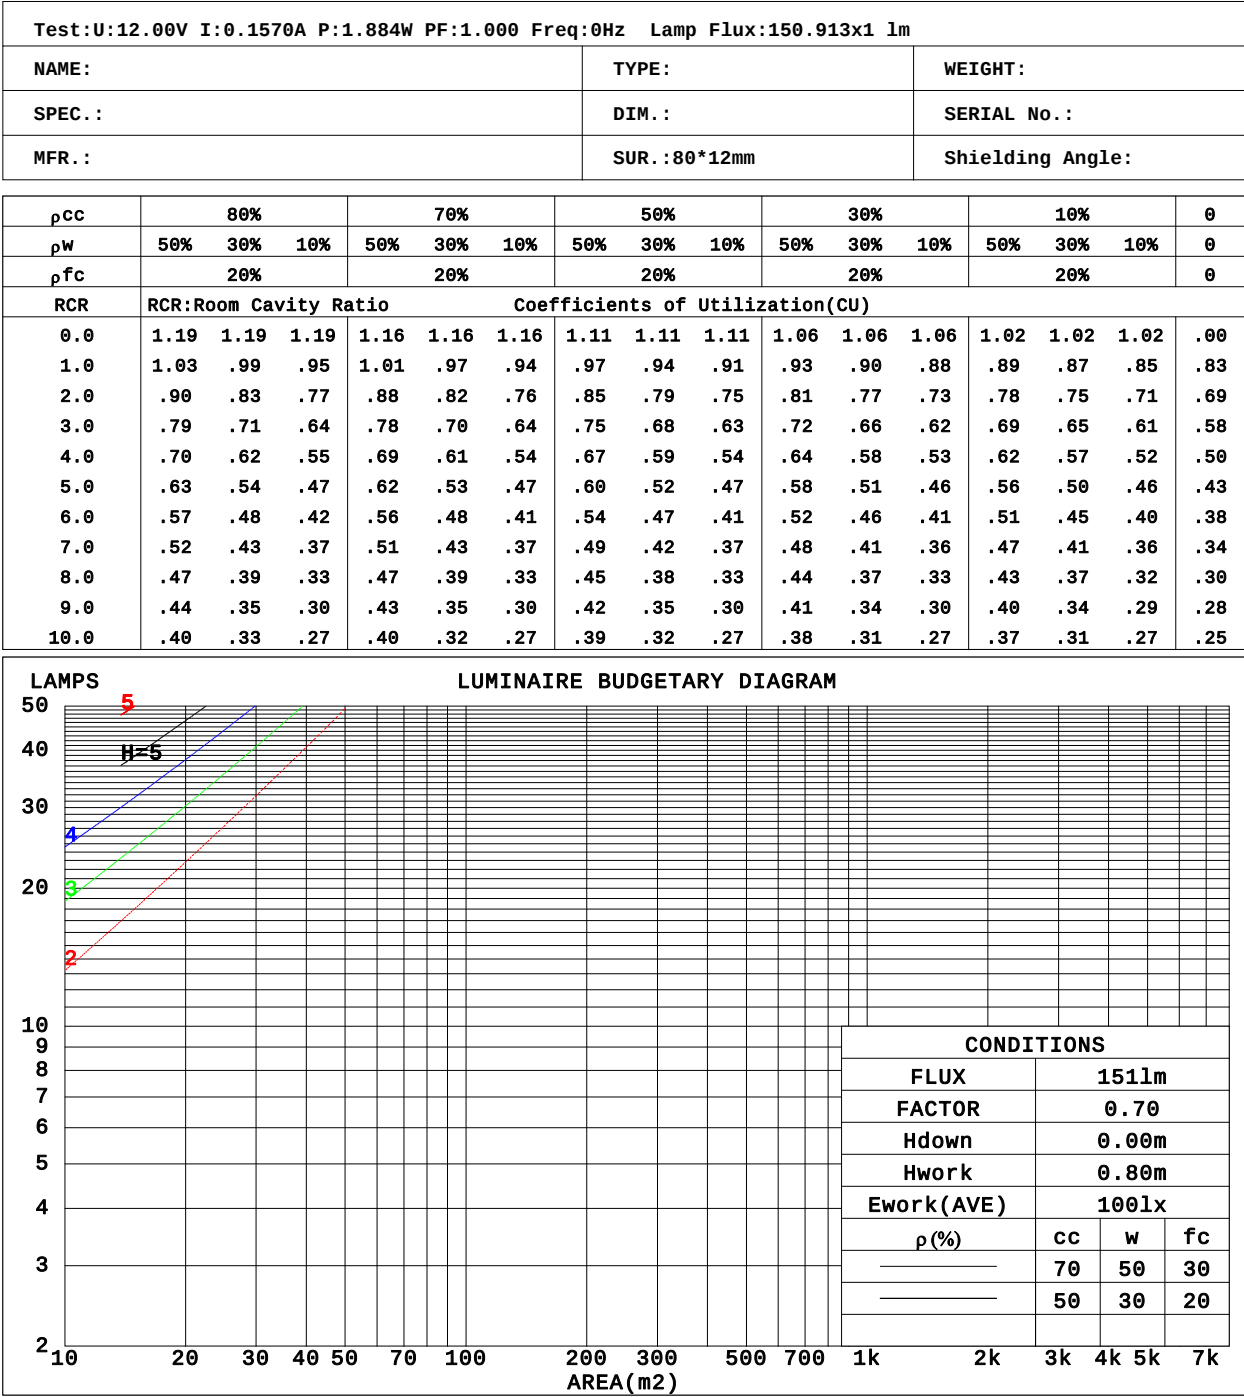

C Range: 0 - 360DEG

C Interval: 30.0DEG

Test Speed: HIGH

Temperature:25DEG

Operators:Qin Meng

Test Date:2023-04-13

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362

Humidity:65.0%

Test Distance:8.540m [K=1.0000]

Remarks:

WEC AND CCEC

Test:U:12.00V I:0.1570A P:1.884W PF:1.000 Freq:0Hz Lamp Flux:150.913x1 lm														
NAME:					TYPE:					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:					SUR.:80*12mm					Shielding Angle:				

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.317	.180	.057	.310	.177	.056	.297	.170	.054	.284	.164	.053	.273	.158	.051	
2.0	.294	.161	.049	.288	.159	.049	.276	.154	.048	.266	.149	.047	.255	.145	.046	
3.0	.270	.144	.043	.265	.142	.043	.255	.138	.042	.245	.134	.041	.236	.131	.040	
4.0	.248	.129	.038	.244	.127	.038	.234	.124	.037	.226	.121	.037	.218	.118	.036	
5.0	.229	.117	.034	.225	.115	.034	.216	.113	.033	.209	.110	.033	.202	.108	.032	
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.188	.099	.029	
7.0	.197	.097	.028	.194	.096	.027	.187	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.184	.090	.025	.181	.089	.025	.175	.087	.025	.170	.086	.025	.164	.084	.025	
9.0	.172	.083	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.155	.079	.023	
10.0	.162	.078	.022	.159	.077	.021	.155	.076	.021	.150	.075	.021	.146	.074	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.191	.191	.191	.163	.163	.163	.112	.112	.112	.064	.064	.064	.020	.020	.020	
1.0	.181	.157	.134	.155	.135	.116	.106	.093	.080	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.098	.148	.114	.085	.102	.079	.059	.059	.046	.035	.019	.015	.011	
3.0	.165	.115	.075	.142	.099	.065	.097	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.157	.102	.059	.135	.088	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.048	.129	.079	.042	.089	.055	.030	.051	.032	.018	.017	.011	.006	
6.0	.142	.083	.040	.122	.072	.035	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.034	.116	.066	.030	.080	.046	.021	.047	.027	.013	.015	.009	.004	
8.0	.129	.070	.030	.111	.061	.026	.077	.043	.018	.045	.025	.011	.014	.008	.004	
9.0	.123	.065	.026	.106	.056	.023	.073	.040	.016	.043	.023	.010	.014	.008	.003	
10.0	.117	.061	.023	.101	.053	.020	.070	.037	.014	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:Qin Meng
 Test Date:2023-04-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:8.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.00V I:0.1570A P:1.884W PF:1.000 Freq:0Hz Lamp Flux:150.913x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.:80*12mm			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	32.3	33.8	32.6	34.0	34.2	32.2	33.8	32.5	34.0	34.2	
	3H	34.1	35.5	34.4	35.8	36.0	34.0	35.4	34.3	35.6	35.9
	4H	34.8	36.2	35.2	36.4	36.7	34.8	36.1	35.1	36.4	36.7
	6H	35.5	36.8	35.8	37.0	37.3	35.4	36.7	35.8	37.0	37.2
	8H	35.9	37.1	36.3	37.4	37.7	35.5	36.7	35.8	37.0	37.3
	12H	36.1	37.3	36.4	37.6	37.9	35.5	36.6	35.8	36.9	37.2
4H	2H	33.0	34.3	33.3	34.6	34.9	32.9	34.3	33.3	34.5	34.8
	3H	35.1	36.2	35.4	36.5	36.8	34.9	36.1	35.3	36.4	36.7
	4H	36.0	37.0	36.3	37.4	37.7	35.9	37.0	36.3	37.3	37.7
	6H	36.8	37.8	37.2	38.1	38.5	36.7	37.7	37.1	38.0	38.4
	8H	37.3	38.2	37.7	38.6	39.0	36.8	37.7	37.2	38.1	38.5
	12H	37.5	38.4	38.0	38.8	39.2	36.8	37.6	37.3	38.0	38.4
8H	4H	36.4	37.3	36.8	37.7	38.1	36.4	37.3	36.8	37.7	38.1
	6H	37.5	38.3	37.9	38.7	39.1	37.4	38.1	37.8	38.5	39.0
	8H	38.1	38.8	38.6	39.2	39.7	37.6	38.2	38.0	38.7	39.1
	12H	38.5	39.1	39.0	39.5	40.0	37.6	38.2	38.1	38.6	39.1
12H	4H	36.5	37.3	36.9	37.7	38.1	36.5	37.3	36.9	37.7	38.1
	6H	37.6	38.3	38.1	38.7	39.2	37.5	38.2	38.0	38.6	39.1
	8H	38.3	38.9	38.8	39.3	39.8	37.7	38.3	38.2	38.7	39.2
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.1 / - 0.2					
2.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.3					

CIE Pub.117, 150.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -6.6)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:Qin Meng
 Test Date:2023-04-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:8.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.00V I:0.1570A P:1.884W PF:1.000 Freq:0Hz Lamp Flux:150.913x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:80*12mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	68	57	50	67	56	49	66	56	49	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	65	79	71	64	57
1.50	88	78	71	86	77	71	83	76	70	62
2.00	95	86	80	93	85	79	89	83	77	69
2.50	99	91	85	97	89	84	93	87	82	74
3.00	102	95	89	100	93	88	96	90	86	78
4.00	106	100	95	104	98	94	99	95	91	82
5.00	108	103	99	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:Qin Meng
 Test Date:2023-04-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:8.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:12.00V I:0.1570A P:1.884W PF:1.000 Freq:0Hz Lamp Flux:150.913x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:80*12mm	Shielding Angle:

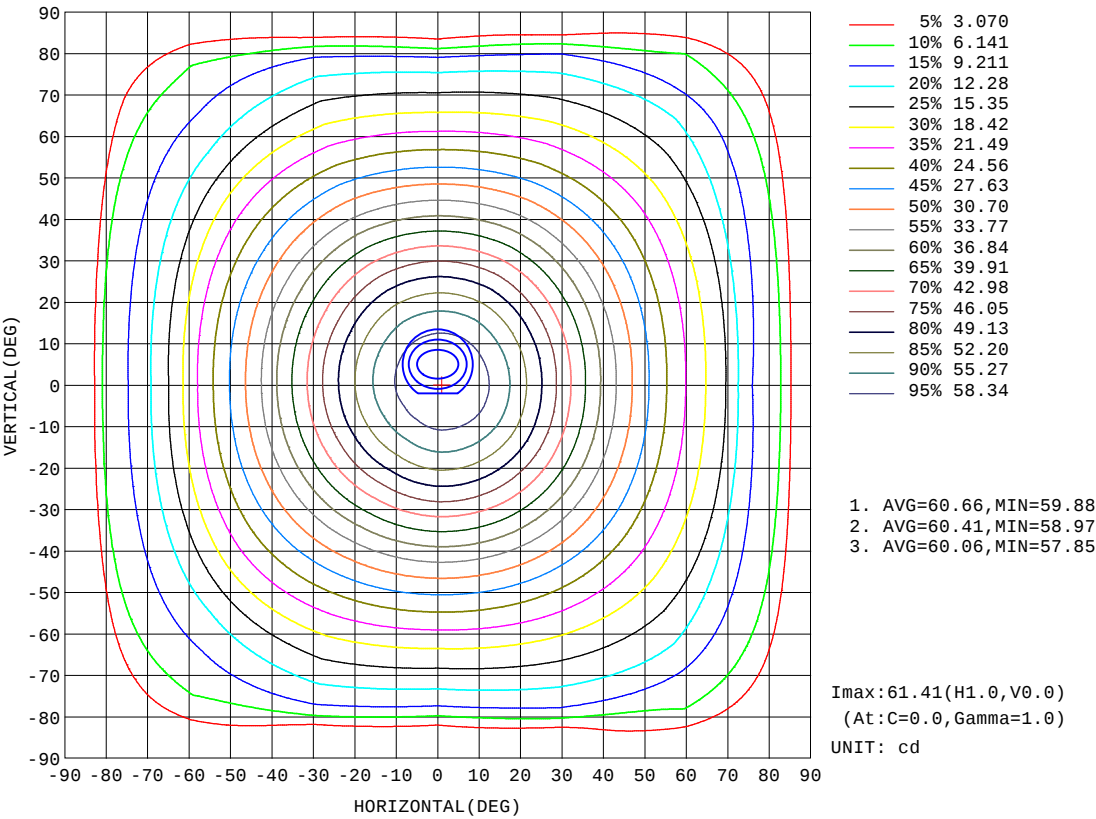


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Qin Meng
Test Date: 2023-04-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 8.540m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.00V I:0.1570A P:1.884W PF:1.000 Freq:0Hz Lamp Flux:150.913x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:80*12mm	Shielding Angle:

Flux out:87.30 lm

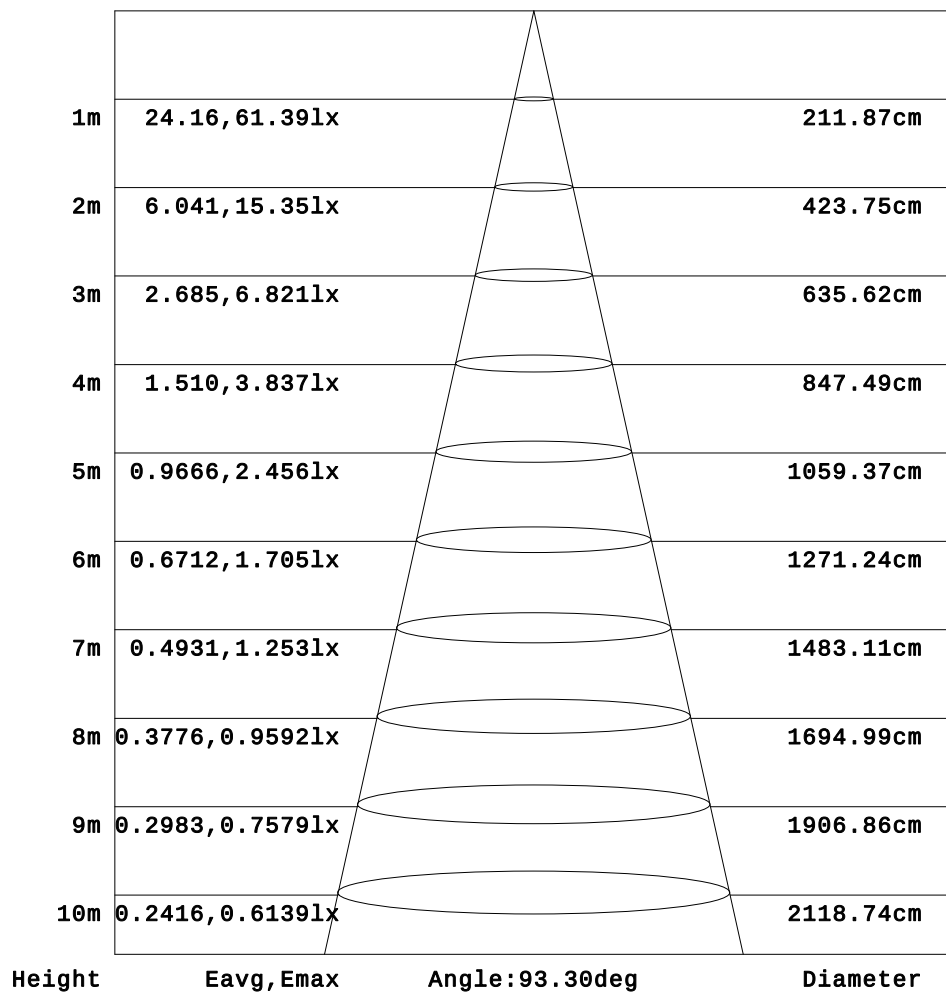


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: Qin Meng
 Test Date: 2023-04-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 8.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:12.00V I:0.1570A P:1.884W PF:1.000 Freq:0Hz Lamp Flux:150.913x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:80*12mm	Shielding Angle:

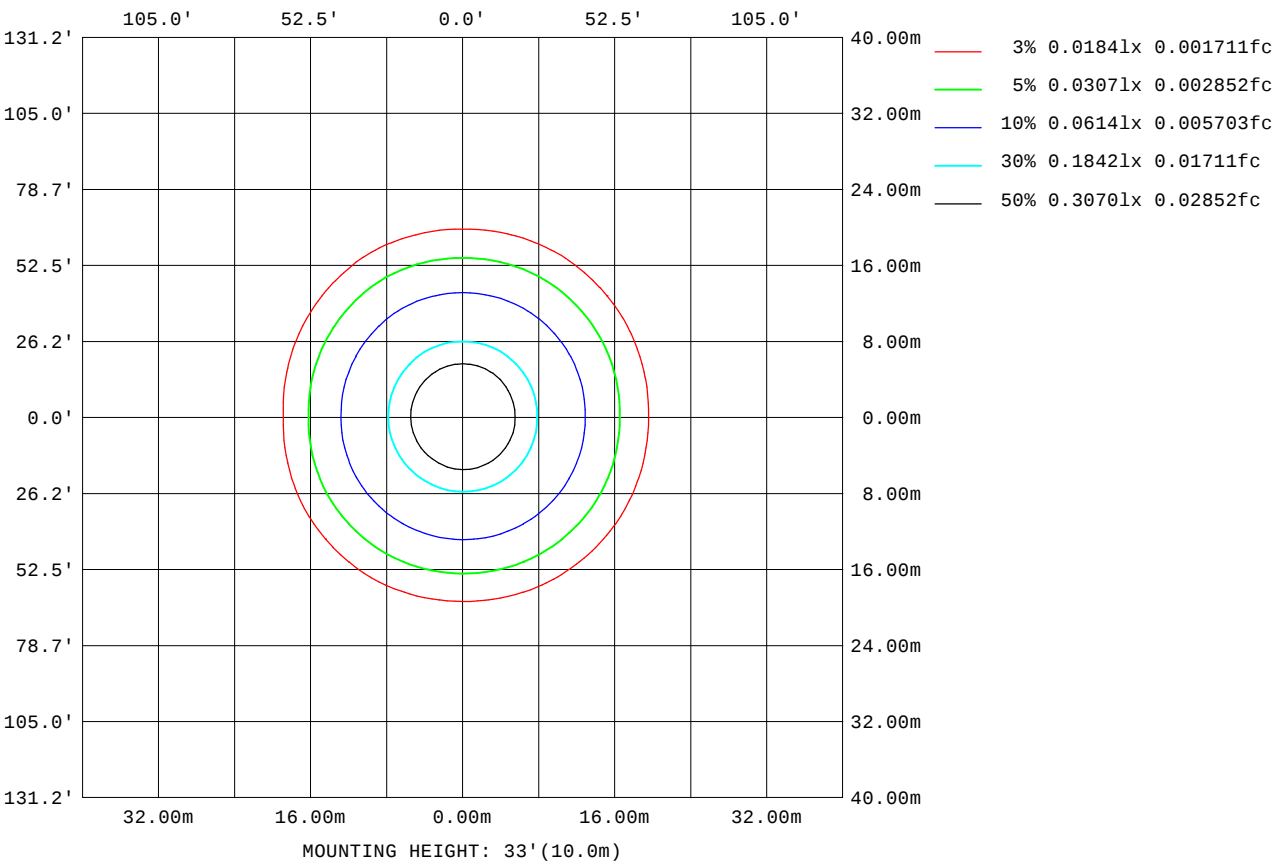

C Range: 0 - 360DEG
C Interval: 30.00DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Qin Meng
Test Date:2023-04-13

γ Range: 0 - 180DEG
γ Interval: 1.00DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:8.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:12.00V I:0.1570A P:1.884W PF:1.000 Freq:0Hz Lamp Flux:150.913x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:80*12mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	39633
L_0~180(75)av	36368
L_0~180(85)av	27071
L_90~270(65)av	43055
L_90~270(75)av	45789
L_90~270(85)av	19344
L_45(65)av	43377
L_45(75)av	47450
L_45(85)av	43957

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Qin Meng
Test Date:2023-04-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:8.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

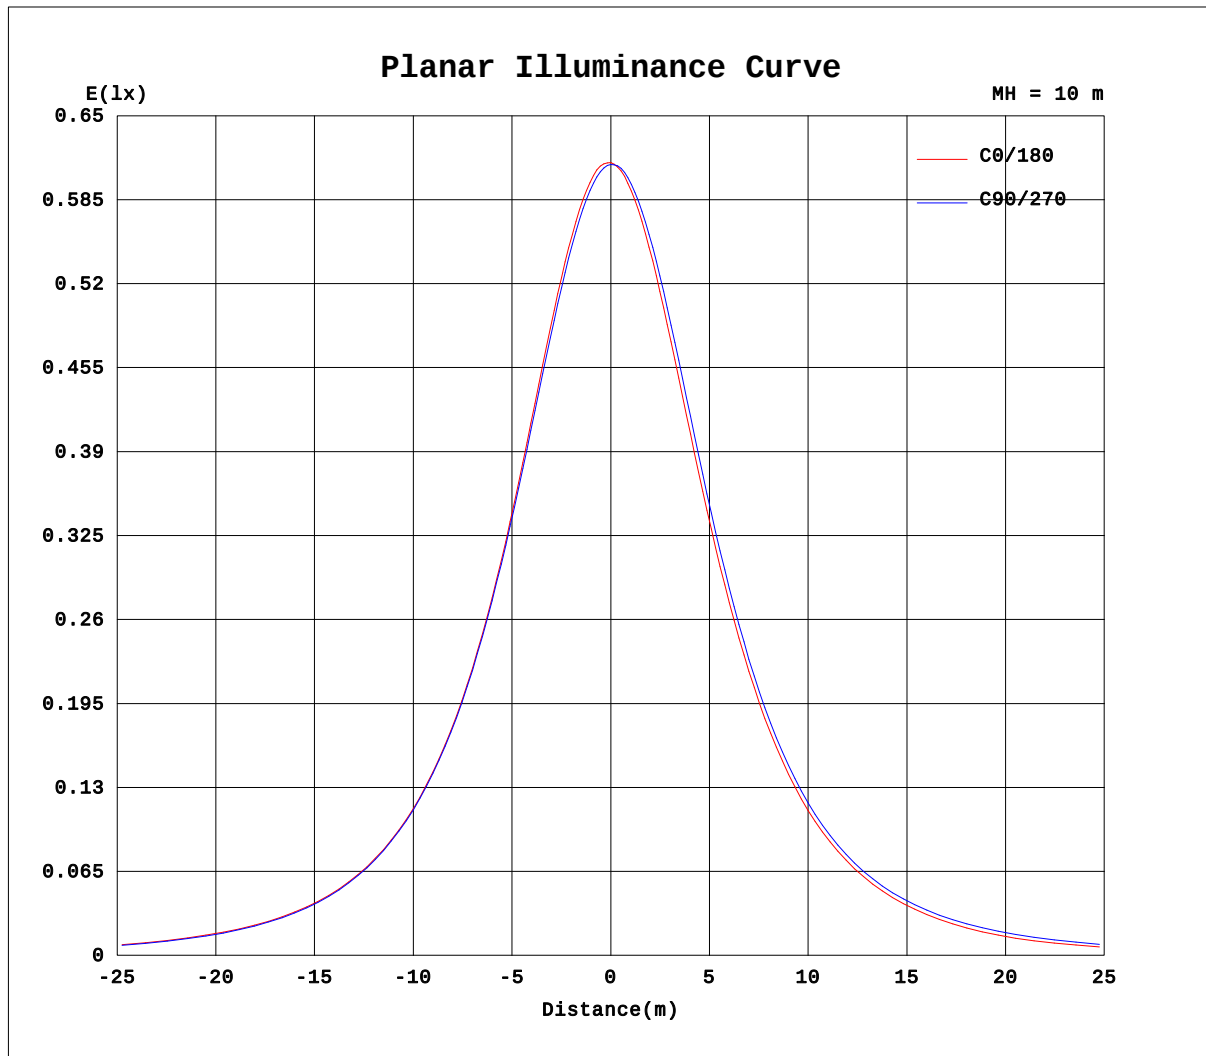

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Qin Meng
Test Date: 2023-04-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 8.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.00V I:0.1570A P:1.884W PF:1.000 Freq:0Hz Lamp Flux:150.913x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:80*12mm						Shielding Angle:		

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330					
0	61.4	61.3	61.3	61.3	61.2	61.1	61.4	61.3	61.3	61.3	61.2	61.1					
5	61.1	60.9	60.7	60.5	60.2	60.2	60.5	60.6	60.7	60.9	60.9	60.9					
10	59.5	59.4	59.0	58.7	58.2	58.1	58.5	58.7	59.2	59.4	59.6	59.5					
15	56.9	56.8	56.3	56.0	55.3	55.2	55.6	56.0	56.7	57.0	57.2	56.9					
20	53.3	53.3	52.9	52.6	51.8	51.8	52.2	52.6	53.4	53.8	53.9	53.5					
25	49.2	49.3	49.0	48.6	47.9	47.9	48.3	48.7	49.7	50.1	50.1	49.6					
30	44.8	45.0	44.8	44.5	43.8	43.8	44.2	44.6	45.6	46.0	46.0	45.3					
35	40.5	40.6	40.5	40.2	39.6	39.7	40.1	40.5	41.5	41.7	41.8	41.0					
40	36.3	36.3	36.3	36.0	35.5	35.6	35.9	36.4	37.3	37.5	37.6	36.9					
45	32.2	32.3	32.2	32.0	31.6	31.6	31.8	32.4	33.3	33.4	33.5	32.9					
50	28.4	28.4	28.3	28.1	27.8	27.8	27.8	28.5	29.5	29.6	29.7	29.1					
55	24.7	24.9	24.7	24.4	24.3	24.2	23.9	24.8	25.8	25.8	26.1	25.6					
60	21.4	21.5	21.3	20.8	20.9	20.6	19.7	21.1	22.4	22.3	22.7	22.2					
65	18.2	18.4	18.1	17.5	17.8	16.6	15.3	17.2	19.1	18.9	19.5	19.1					
70	15.0	15.5	15.2	14.3	14.8	12.7	11.7	13.3	16.0	15.7	16.4	16.1					
75	9.79	12.5	12.3	11.2	11.9	9.81	9.04	10.3	13.1	12.5	13.5	13.2					
80	8.27	8.73	8.62	5.79	7.80	7.24	6.73	7.95	9.73	7.93	10.4	9.39					
85	3.36	5.28	1.63	1.40	1.41	3.72	1.36	5.06	2.56	1.97	3.29	6.10					
90	0.16	0.46	0.53	0.63	0.52	0.32	0.00	0.47	0.61	0.82	0.71	0.69					
95	0.00	0.00	0.01	0.02	0.01	0.00	0.00	0.00	0.09	0.28	0.11	0.02					
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:Qin Meng
 Test Date:2023-04-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:8.540m [K=1.0000]
 Remarks: