

AL-08 SERIES AREA LIGHT

 $\textbf{landscape} \, \cdot \, \textbf{entertainment} \, \cdot \, \textbf{architectural} \, \cdot \, \textbf{hospitality} \, \cdot \, \textbf{illumination}$











AREA LIGHTS AL-08 SERIES



SPECIFICATIONS

CONSTRUCTION: 3.5" diameter aluminum, brass, copper or black ABS bollard with aluminum or brass top (ABS has black aluminum top; copper has brass top)

LENS: White high-impact acrylic

LAMP SUPPLIED: 18 watt S-8 #1141; 1200 hours average rating (25w max.)

LAMP OPTIONS: We recommend 3w 50,000 hours average rating OMNI-3 LED (-LED3) or OMNI-3

Super Saver (-LED3SS) 10,000 hours average rating 20w Xenon (-X) or 20w Halogen (-H) **SOCKET:** Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v., both with 200° C silicone lead wires

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v. only) For 25 foot 16/2 fixture lead wire add -25F to catalog number.

120v. Standard wiring

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable

(12/2, 10/2 or 8/2 only) 12v. only

MOUNTING: Standard angle cut model with 4 black ABS stabilizing fins (FA-42-FIN)

Deck Mount model (-DM) with ABS mounting base with screws

FINISH: Aluminum - Black texture polyester powder coat-optional finishes available

Brass - Unfinished brass-optional finishes available Copper - Unfinished copper-optional finishes available

ABS - Black or Rubbed Verde

ORDERING INFORMATION CATALOG NO. DESCRIPTION SHIP WEIGHT LAMP AL-08-BLT Black ABS 3.5" Bollard 18w S8 #1141 3.0 lbs. AL-08-ALUM-BLT Aluminum 3.5" Bollard 18w S8 #1141 3.0 lbs. AL-08-BRS Brass 3.5" Bollard 18w S8 #1141 4.0 lbs. AL-08-COP Copper 3.5" Bollard 18w S8 #1141 3.0 lbs. Black ABS 3.5" Bollard AL-08-DM-BLT 18w S8 #1141 3.0 lbs. AL-08-DM-ALUM-BLT Aluminum 3.5" Bollard 18w S8 #1141 3.0 lbs.

18w S8 #1141

18w S8 #1141

4.0 lbs.

3.0 lbs.

120 VOLT COMPACT FLUORESCENT BOLLARDS:

LAMP: CFL T4 single tube, 4100°K 10,000 hour (7 watt max.)

Brass 3.5" Bollard

Copper 3.5" Bollard

BALLAST: Internal Type 1 outdoor magnetic clamped core ballast. 120 volt primary amp draw of 0.165, not including lamp wattage. 5 and 7 watt CFL operate off same ballast and are interchangeable. 240 volt and 277 volt options available - consult factory for details.

SOCKET: G23 2-pin


FSA-00

AL-08-DM-BRS


AL-08-DMCOP

AL-08-FL5BLT	Black ABS 3.5" Bollard	5w 4100°K CFL	3.0 lbs.
AL-08-FL5-ALUMBLT	Aluminum 3.5" Bollard	5w 4100°K CFL	3.0 lbs.
AL-08-FL5-BRS	Brass 3.5" Bollard	5w 4100°K CFL	4.0 lbs.
AL-08-FL5-COP	Copper 3.5" Bollard	5w 4100°K CFL	3.0 lbs.
AL-08-FL7BLT	Black ABS 3.5" Bollard	7w 4100°K CFL	3.0 lbs.
AL-08-FL7-ALUMBLT	Aluminum 3.5" Bollard	7w 4100°K CFL	3.0 lbs.
AL-08-FL7-BRS	Brass 3.5" Bollard	7w 4100°K CFL	4.0 lbs.
AL-08-FL7-COP	Copper 3.5" Bollard	7w 4100°K CFL	3.0 lbs.

LIGHT DISTRIBUTIONS AND PHOTOMETRICS




AL-08 Light Distribution and Photometrics 14 ft. (4.3m) diameter



AL-08-FL-7-120V

Light Distribution and Photometrics 16 ft. (4.9m) diameter



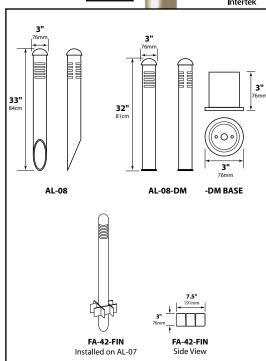

JOB INFORMATION	
Туре:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	
FOCUS INDUSTRIES INC. 25301 COMMERCENTRE DRIVE LAKE FOREST, CA 92630	www.focusindustries.com sales@focusindustries.com (949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-САМ	-WTX	-НТХ	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC	-BAR/CAR	-BAV/CAV	-BAT
052217							RRAS	S & COPPER ONI	γ						