



AREA LIGHTS AL-08-SM SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: 1.75" diameter extruded copper post

LENS: Frosted high-impact acrylic

LAMP SUPPLIED: 18w S8 #1141; 1200 hours average rating (25w max.)

LAMP OPTIONS: We recommend 10,000 hours average rating 20w Xenon (-X) or 20w Halogen (-H) or 3w 50,000 hours average rating OMNI-3 LED (-LED3)

SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s)

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)


For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

MOUNTING: Angle cut post

Deck Mount version (-DM) available with FA-03 black 9" ABS stake, tapped 1/2" NPS

FINISH: Unfinished copper. Optional finishes available.



AL-08-SM AL-08-SM-DM




IP54




ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
AL-08-SM-COP	Copper Small Bollard	18w S8 #1141	2.0 lbs.
AL-08-SM-DM-COP	Copper Small Bollard, Deck Mount	18w S8 #1141	2.0 lbs.

MOUNTING ACCESSORIES (-DM MODEL ONLY)

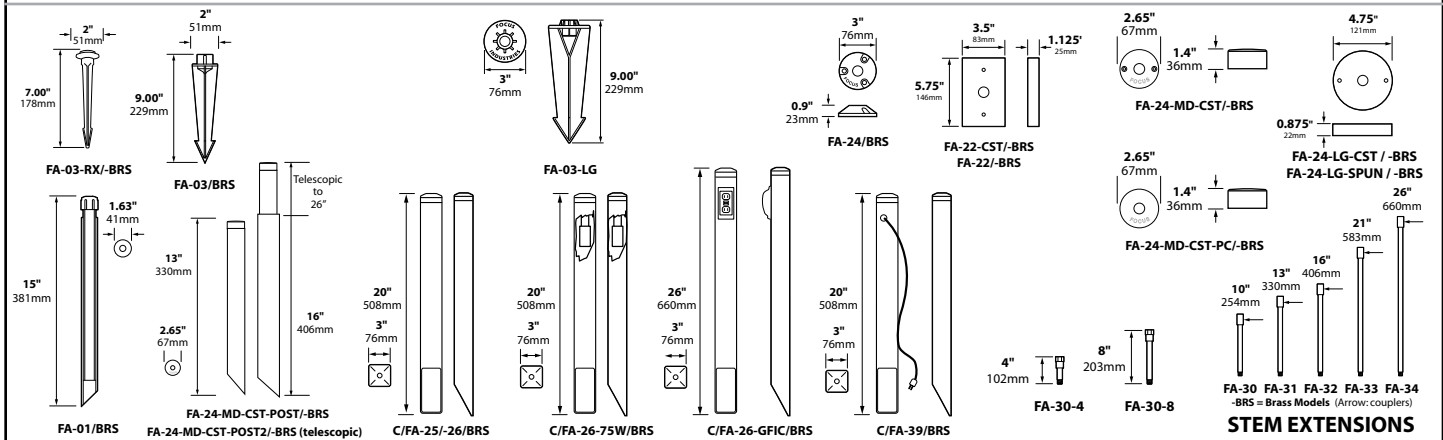

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

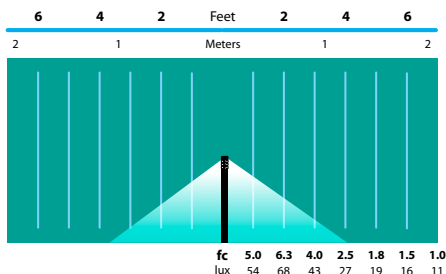

AL-08-SM

Light Distribution and Photometrics
8ft (2.5m) diameter

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT

AL-08-SM Cut Sheet* 060214

BRASS & COPPER ONLY