



# DIRECTIONAL SURFACE MOUNT SL-26 SERIES



TYPE

## SPECIFICATIONS

**CONSTRUCTION:** Cast aluminum, stainless steel or brass directional Bullet; matching stamped aluminum, stainless steel or brass FA-111-SM J-box and adjustable aiming bracket

**LENS:** High impact clear tempered convex glass

**O-RING:** High temperature red silicone

**LAMP SUPPLIED:** 20w MR11 FL(FTD) 2000 hours average rating (35w max)

**LAMP OPTIONS:** We recommend 2w MR11 ARROW LED 50,000 hours average rating; 20w MR11 ULTRA10,000 hours average rating; ALR12 option available, see ordering information below

**SOCKET:** High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires; Double contact bayonet, brass nickel plated lamp socket screw shell (Ba15d) for ALR12 lamp

**WIRING:** Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

**CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

**MOUNTING:** FA-111-SM surface mount J-box


**FINISH:** Aluminum-Black texture polyester powder coat. Optional finishes available  
Brass-Unfinished brass. Optional finishes available. Stainless Steel - Machined finish



SL-26-BLT


## ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
SL-26-BLT	Cast Aluminum Surface Mount Bullet with Aiming Bracket and J-Box	20w MR11 FL(FTD)	2.0 lbs.
SL-26-BRS	Cast Brass Surface Mount Bullet with Aiming Bracket and J-Box	20w MR11 FL(FTD)	3.0 lbs.
SL-26-SS	Cast Stainless Steel Surface Mount Bullet with Aiming Bracket and J-Box	20w MR11 FL(FTD)	3.0 lbs.
SL-26-ALR12-BLT	Cast Aluminum Surface Mount Bullet with Aiming Bracket and J-Box	20w ALR12 FL(32°)	2.0 lbs.
SL-26-ALR12-BRS	Cast Brass Surface Mount Bullet with Aiming Bracket and J-Box	20w ALR12 FL(32°)	3.0 lbs.
SL-26-ALR12-SS	Cast Stainless Steel Surface Mount Bullet with Aiming Bracket and J-Box	20w ALR12 FL(32°)	3.0 lbs.

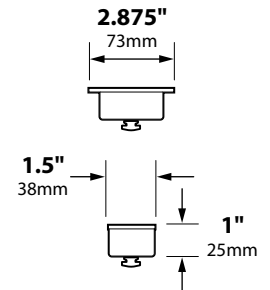


FA-111-SM


## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

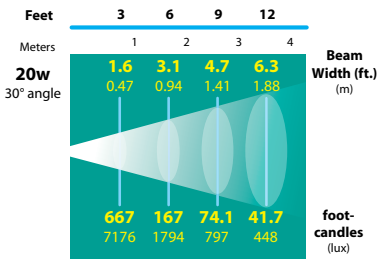



20w MR11 FL (FTD)

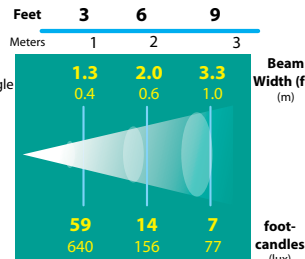

FL-LED-MR11-15

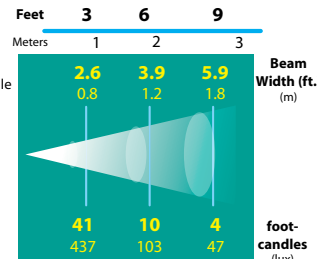

FL-LED-MR11-40

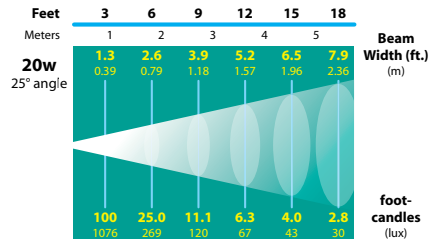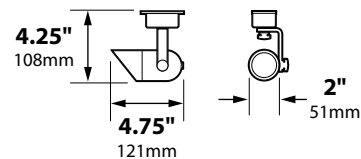

20w ALR12 FL (GBF)

## BEAM/GLARE CONTROL ACCESSORIES

FA-08-17	Round 1/8" Hex Cell Louver
FA-10-17-BLUE	Blue Tempered Glass Lens
FA-10-17-GREEN	Green Tempered Glass Lens
FA-98-17	Linear Spread Tempered Glass Lens
FA-104-17	Wide Spread Tempered Glass Lens Softener



### JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC. 25301 COMMERCENTRE DRIVE LAKE FOREST, CA 92630  
www.focusindustries.com sales@focusindustries.com (949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC	-BAR/CAR	-BAV/CAV	-BAT