

Focus Industries

Barbecue LED Lighting

Lighting Excellence for Every Outdoor Play: Illuminate Your Fun with Focus Industries Inc.

Elevate your outdoor experiences with Focus Industries Inc.'s premium lighting solutions tailored for golf courses, putting greens, shuffleboard courts, bocce ball courts, and all your outdoor entertainment needs.





BBQ & GRILL LED LIGHTS 12v | 120v

BQ01 SERIES: THREADED EGG









Top Mount (-TM)



5" Clamp (-FC5)



(-QC)

FIXTURE: 316 stainless steel housing

ARM: 12" 316 stainless steel rigid stem with 16" stainless steel flex arm on top.

Clear polyolefin shrink cover protection on flex arm.

LENS: High impact clear tempered flat glass **O-RING:** High temperature red silicone

12v SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

12v LED SUPPLIED: 7w MR16 Super Saver LED (L48); 40,000 hours, $36\degree$, 550 lumen, 3000K

120v SOCKET: High temperature ceramic medium base with 250°C silicone lead wires

120v LED SUPPLIED: 7w, PAR16, medium base LED (L134), 40,000 hours, 36°, 550 lumen, 3000K

FINISH: Stainless Steel - brushed

ORDERING INFORMATION

POWER KIT NEEDED


BQFD01L48SS	12v 316 stainless steel flex deck mount bbq light	02, 03
BQFC301L48SS	12v 316 stainless steel flex w/ 3" clamp bbq light	02, 03
BQFC501L48SS	12v 316 stainless steel flex w/ 5" clamp bbq light	02, 03
BQQC01L48SS	12v 316 stainless steel w/ quick connect bbq light	03
BQTM01L48SS	12v 316 stainless steel top mount bbq light	02, 03
BQFD01L134SS	120v 316 stainless steel flex deck mount bbq light	04
BQFC301L134SS	120v 316 stainless steel flex w/ 3" clamp bbq light	supplied
BQFC501L134SS	120v 316 stainless steel flex w/ 5" clamp bbq light	supplied
BQTM01L134SS	120v 316 stainless steel flex deck bbq light	04

BQFA02	12v battery w/ 10ft 18/2 lead wire & battery charger
BQFA03	FAO5 quick connector & 20ft 18/2 wire to existing voltage systems-12v
BQFA04	9' power cord 18/3 SJTW & plug-120v



12v | 120v

BQ02 SERIES: ANGLED BULLET

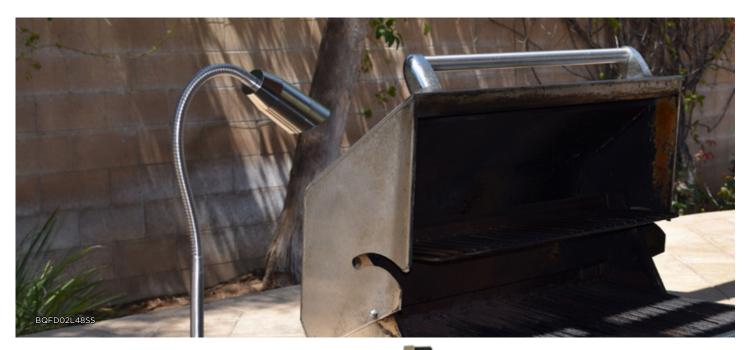





Top Mount (-TM)





(-QC)

Deck (-FD)

FIXTURE: 316 stainless steel housing

ARM: 12" 316 stainless steel rigid stem with 16" stainless steel flex arm on top.

Clear polyolefin shrink cover protection on flex arm.

LENS: High impact clear tempered flat glass **O-RING:** High temperature red silicone

12v SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

12v LED SUPPLIED: 7w MR16 Super Saver LED (L48); 40,000 hours, 36°, 550 lumen, 3000K

120v SOCKET: High temperature ceramic medium base with 250°C silicone lead wires

120v LED SUPPLIED: 7w, PAR16, medium base LED (L134), 40,000 hours, 36°, 550 lumen, 3000K

FINISH: Stainless Steel - brushed

ORDERING INFORMATION

POWER KIT NEEDED

BQFD02L48SS	12v 316 stainless steel flex deck mount bbq light	02, 03
BQFC302L48SS	12v 316 stainless steel flex w/ 3" clamp bbq light	02, 03
BQFC502L48SS	12v 316 stainless steel flex w/ 5" clamp bbq light	02, 03
BQQC02L48SS	12v 316 stainless steel w/ quick connect bbq light	03
BQTM02L48SS	12v 316 stainless steel top mount bbq light	02, 03
BQFD02L134SS	120v 316 stainless steel flex deck mount bbq light	04
BQFC302L134SS	120v 316 stainless steel flex w/ 3" clamp bbq light	supplied
BQFC502L134SS	120v 316 stainless steel flex w/ 5" clamp bbq light	supplied
BQTM02L134SS	120v 316 stainless steel flex deck bbq light	04

BQFA02	12v battery w/ 10ft 18/2 lead wire & battery charger
BQFA03	FA05 quick connector & 20ft 18/2 wire to existing voltage systems-12v
BQFA04	9' power cord 18/3 SJTW & plug-120v





12v | 120v

BQ03 SERIES: THREADED CYLINDER





Deck (-FD)







5" Clamp (-FC5)



(-QC)

FIXTURE: 316 stainless steel housing

ARM: 12" 316 stainless steel rigid stem with 16" stainless steel flex arm on top.

Clear polyolefin shrink cover protection on flex arm.

LENS: High impact clear tempered flat glass

O-RING: High temperature red silicone

12v SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

12v LED SUPPLIED: 7w MR16 Super Saver LED (L48); 40,000 hours, 36°, 550 lumens, 3000K

120v SOCKET: High temperature ceramic medium base with 250°C silicone lead wires

120v LED SUPPLIED: 7w, PAR16, medium base LED (L134), 40,000 hours, 36°, 550 lumens, 3000K

FINISH: Stainless Steel - brushed

ORDERING INFORMATION

POWER KIT NEEDED


BQFD01L48SS	12v 316 stainless steel flex deck mount bbq light	02, 03
BQFC301L48SS	12v 316 stainless steel flex w/ 3" clamp bbq light	02, 03
BQFC501L48SS	12v 316 stainless steel flex w/ 5" clamp bbq light	02, 03
BQQC01L48SS	12v 316 stainless steel w/ quick connect bbq light	03
BQTM01L48SS	12v 316 stainless steel top mount bbq light	02, 03
BQFD01L134SS	120v 316 stainless steel flex deck mount bbq light	04
BQFC301L134SS	120v 316 stainless steel flex w/ 3" clamp bbq light	supplied
BQFC501L134SS	120v 316 stainless steel flex w/ 5" clamp bbq light	supplied
BQTM01L134SS	120v 316 stainless steel flex deck bbq light	04

BQFA02	12v battery w/ 10ft 18/2 lead wire & battery charger
BQFA03	FAO5 quick connector & 20ft 18/2 wire to existing voltage systems-12v
BQFA04	9' power cord 18/3 SJTW & plug-120v



12v | 120v

COMMERCIAL SERIES

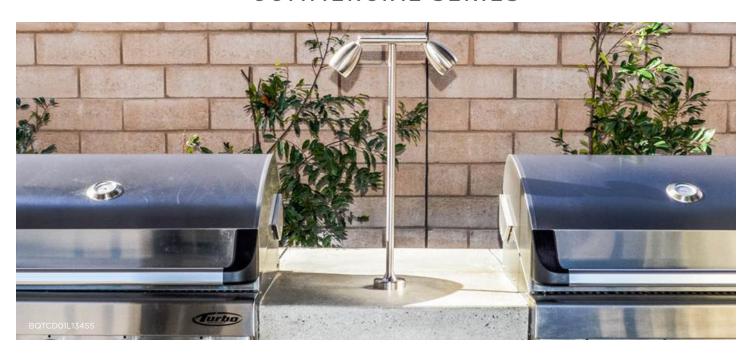

FIXTURE: 316 stainless steel housing

COMMERCIAL STEM: 24" tall 316 stainless steel rigid stem and $335^{\circ}x$ 90° rotating swivel **COMMERCIAL DOUBLE STEM:** Commercial grade 0.8" x 24" 316 stainless steel rigid stem

and 1" x 2.5" bar on top with two 335° x 90° rotating swivels

MOUNT: Cast 316 stainless steel deck mount canopy or weighted base **SWITCH:** On/Off push button with weatherproof rubber boot cover

LENS: High impact clear tempered flat glass **O-RING:** High temperature red silicone


12v SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires 12v LED SUPPLIED: 7w MR16 Super Saver LED (L48); 40,000 hours, 36°, 550 lumens 120v SOCKET: High temperature ceramic medium base with 250°C silicone lead wires 120v LED SUPPLIED: 7w, PAR16, medium base LED (L134), 40,000 hours, 36°, 550 lumens

FINISH: Stainless Steel - Brushed

ORDERING INFORMATION

POWER KIT NEEDED

BQCD01L48SS	12v, Commercial Deck Mount 316 SS BBQ Light	03
BQCD02L48SS	12v, Commercial Deck Mount 316 SS BBQ Light	03
BQCD03L48SS	12v, Commercial Deck Mount 316 SS BBQ Light	03
BQTCD01L48SS	12v, Commercial Deck Mount 316 SS BBQ Light with Twin Heads	03
BQTCD02L48SS	12v, Commercial Deck Mount 316 SS BBQ Light with Twin Heads	03
BQTCD03L48SS	12v, Commercial Deck Mount 316 SS BBQ Light with Twin Heads	03
BQTTM01L48SS	12v, Commercial Deck Mount 316 SS BBQ Light	03
BQCD01L134SS	120v, Commercial Deck Mount 316 SS BBQ Light	04
BQCD02L134SS	120v, Commercial Deck Mount 316 SS BBQ Light	04
BQCD03L134SS	120v, Commercial Deck Mount 316 SS BBQ Light	04
BQTCD01L134SS	120v, Commercial Deck Mount 316 SS BBQ Light with Twin Heads	04
BQTCD02L134SS	120v, Commercial Deck Mount 316 SS BBQ Light with Twin Heads	04
BQTCD03L134SS	120v, Commercial Deck Mount 316 SS BBQ Light with Twin Heads	04
BQTTM03L134SS	120v, Commercial Deck Mount 316 SS BBQ Light with Twin Heads	04





Deck (-FD)



Top Mount (-TM)



UMBRELLA LED LIGHTS



UL03

3x 3.5" Laser Bullets Aluminum, Brass, or Copper (Brass Hardware included) 3x 1.5w MR8 LED 120V 1.25" - 1.625" Ø

4.5w Total Using 3x MR8 LED's

- 3 fully adjustable mini bullets
- 3 MR8 Floodlights fully cover table top and / or umbrella canopy
- Supplied with 10' of black SPT-1W lead wire for easy connection to 12v source
- Adjustable
- "Quick Mount" to all standard size umbrellas
- Custom diameter umbrella pole sizes or 4", 6" or 8" diameter palapa poles available



12v | 120v


POWER SUPPLIES 12V/120V




BQFA02 Battery w/ 10ft 18/2 Lead Wire & Battery Charger —12V



BQFA03 FA05 Quick Connector & 20FT 18/2 Wire To Existing Voltage Systems -12v




1: Plug 9' grounded power cord into weatherproof receptacle via power cord (supplied by Focus)




2: Plug-in 12v transformer to 120v receptacle with 10′ 18/2 SPT-1W black lead wire




3: Quick connect to 12v rechargeable/portable battery with 10′ 18/2 SPT-1W black lead wire



4: Direct connection to 12v. landscape lighting system with supplied FA-05 Quick Connector with 20′ 18/2 SPT-1W black lead wire



5: Plug 9' grounded power cord into weatherproof receptacle via power cord (supplied by Focus)



6: A: Hard wire directly into internal J-Box supplied within built in BBQ

B: If receptacle is present, attach a grounded mechanical plug and simply plug in



CONTACT US

www.focusindustries.com (949)830-1350 | Toll Free: (888)882-1350 orders@focusindustries.com marketing@focusindustries.com

STAY FOCUSED - WE'LL MAKE IT YOUR WAY!