RXT TRANSFORMER

RXT

PROJECT: | TYPE: | DATE:

CATALOG NUMBER:

LED TECHNOLOGY

SS





CATALOG ORDER LOGIC

EXAMPLE: RXT1260MV

TRANSFORMER TYPE

RXT	Remedy Series Stainless Steel Transformer

SERIES

☐ 1260MV	60w Multi-volt Transformer, Timer Ready (Single Circuit)
☐ 12120MV	120w Multi-volt Transformer, Timer Ready
☐ 12180MV	180w Multi-volt Transformer, Timer Ready
☐ 12300MV	300w Multi-volt Transformer, Timer Ready
☐ 12600MV	600w Multi-volt Transformer, Timer Ready (Twin Circuit)

TIMER OPTIONS

Blank	Timer Ready (Standard)
☐ T	Mechanical Timer

PHOTO CELL OPTIONS

☐ PC	Photocell
☐ RPC	Remote Photocell

MATERIAL

SS	304Stainless Steel, Brushed Finish

ADDITIONAL INFORMATION

Timer ready receptacle for use with plug-in-timer (simply plug in for use).
Easy replacement of timer or control device
Manual operation.


UL1838 UL1598 CE NEMA 3R

FOCUS INDUSTRIES
landscape • architectural • hospitality • entertainment • illumination

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 I TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED.
MANUFACTURED.
IN THE USA.

THIS DOCUMENT CONTAINS INFORMATION PROPRIETY OF FOCUS INDUSTRIES, AND ITS POSSESSION DOES NOT GRANT ANY RIGHTS TO REPRODUCE, MANUFACTURE, SELL, OR DISCLOSE THE CONTENTS DESCRIBED IN THIS DOCUMENT. REPRODUCTION, DISCLOSURE, AND MANUFACTURING WITHOUT THE WRITTEN CONSENT AND AUTHORIZATION OF FOCUS INDUSTRIES IS STRICTLY FORBIDDEN.





RXT TRANSFORMER

RXT

PROJECT:	TYPE:	DATE:
CATALOG NUMBER:		

DIMENSIONS

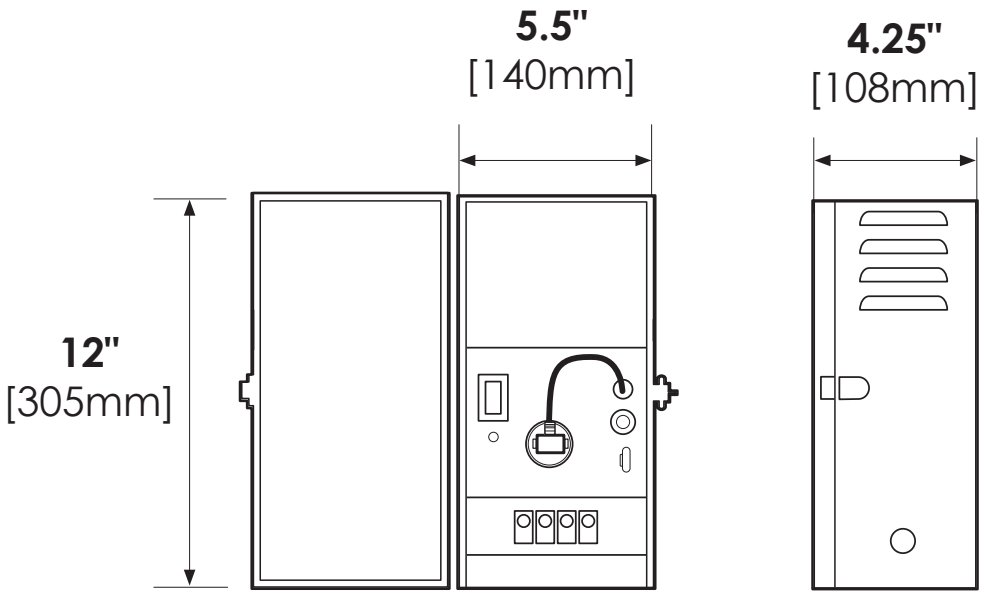



2x 1/2" (Trade Size) Plugged Knockouts


UL1838 UL1598 CE NEMA 3R

FOCUS INDUSTRIES
landscape • architectural • hospitality • entertainment • illumination

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 I TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED.
MANUFACTURED.
IN THE USA.

THIS DOCUMENT CONTAINS INFORMATION PROPRIETY OF FOCUS INDUSTRIES, AND ITS POSSESSION DOES NOT GRANT ANY RIGHTS TO REPRODUCE, MANUFACTURE, SELL, OR DISCLOSE THE CONTENTS DESCRIBED IN THIS DOCUMENT. REPRODUCTION, DISCLOSURE, AND MANUFACTURING WITHOUT THE WRITTEN CONSENT AND AUTHORIZATION OF FOCUS INDUSTRIES IS STRICTLY FORBIDDEN.



RXT TRANSFORMER


RXT

PROJECT:	TYPE:	DATE:
CATALOG NUMBER:		

ACCESSORIES

Faceplates can be field installed

TIMER OPTIONS



RXTFPT60 / T300 / T600
Mechanical Timer (-T)



PCRXTKIT
Photocell (-PC)



RPCRXTKIT
Remote Photocell (-RPC)

SPECIFICATIONS

MATERIALS/FEATURES

- UL1838 and UL1598 listed, the standard for low voltage landscape lighting systems
- 60, 120, 180, 300 and 600 watt output models available
- Multi Voltage output standard (12.5, 13.5 & 14.5 Volts)
- Super Terminal Lugs with capacity of 3 x #8, 5 x #10, 7 x #12 or 9 x #14 gauge wires
- 304 Stainless Steel enclosure (Lifetime Warranty)
- Removable hinged door is lockable and weather sealed
- Above grade, NEMA 3R rated, rain tight enclosure
- LED indicators for instant recognition of 120v and 12v power
- Timer Ready standard (for plug in timers)
- Optional Mechanical Timer (-T) face plates can be factory or field installed
- Photocell Ready with quick connector (not on -AT models)
- Supplied with conduit knockouts and accessory knockouts conduit
- Bottom panel swings down for easy access wiring
- Mounting plate and hardware supplied for easy installation

ELECTRICAL

ETL LISTED c US Intertek

CE

NEMA 3R

UL1598

UL1838

- Long life, high temperature (130°C) class 'B' rated transformer core
- Copper Shielded isolation/insulation type; No contact between 120v and 12v windings
- 1500v Isolation between all windings and ground
- Grade M19 electric grade steel for superior electrical and magnetic properties
- Single phase, open core and coil
- E.L. laminated winding and is protected by 180°C thermal switch.
- Double vacuumed impregnated with black slate flour
- Filled varnish for superior heat dissipation and noise reduction - Class 180°C
- 120v primary, 12.5v secondary 50/60 Hertz/cycle (standard)
- 6 foot 18/3 SJT-WA weatherproof grounded power cord with flat angle plug
- On/Off rocker switch
- Extra heavy duty (80 amps) terminal lugs
- Manually resettable circuit breakers on front panel for overload and short circuit protection

FINISH

304 Stainless Steel enclosure with #4 Brushed finish

FOCUS INDUSTRIES
landscape • architectural • hospitality • entertainment • illumination

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 I TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED.
MANUFACTURED.
IN THE USA.

THIS DOCUMENT CONTAINS INFORMATION PROPRIETY OF FOCUS INDUSTRIES, AND ITS POSSESSION DOES NOT GRANT ANY RIGHTS TO REPRODUCE, MANUFACTURE, SELL, OR DISCLOSE THE CONTENTS DESCRIBED IN THIS DOCUMENT. REPRODUCTION, DISCLOSURE, AND MANUFACTURING WITHOUT THE WRITTEN CONSENT AND AUTHORIZATION OF FOCUS INDUSTRIES IS STRICTLY FORBIDDEN.